DENSO ROBOT

Programming Support Tool

WINCAPSIII GUIDE

Copyright © DENSO WAVE INCORPORATED, 2008-2010
All rights reserved. No part of this publication may be reproduced in any form or by any means without permission in writing from the publisher.
Specifications are subject to change without prior notice.

All products and company names mentioned are trademarks or registered trademarks of their respective holders.

Preface

Thank you for purchasing our programming support tool, WINCAPS III.

WINCAPS III is a package for efficiently developing and validating robot operation programs (PACs). It permits checking of robot operation, variables, and I/O from a computer connected to the robot controller. It also supports managing program files as projects, storing frequently used programs in program banks, and various other program management functions.

Before using WINCAPS III, read this manual carefully to safely get the maximum benefit from your WINCAPS III system.

After you have finished reading this manual, keep it handy for speedy reference.

Important

To ensure operator safety, be sure to read the precautions and instructions in "SAFETY PRECAUTIONS."

How this book is organized

This book consists of the following.

SAFETY PRECAUTIONS

Defines safety terms and related symbols and provides precautions to be observed. Be sure to read this section before operating your robot.

Chapter 1 Overview

Describes the WINCAPS III features, product components, operating environment, and installation procedure.

Chapter 2 Basic Functions and Operational Flow

Describes the basic functions, operational flow and editor categories of WINCAPS III.

Chapter 3 Starting Up/Shutting Down

Describes the WINCAPS III starting-up and shutting-down procedures, its windows, tools and menus.

Chapter 4 Creating a Project

Describes project creation methods, settings and data processing.

Chapter 5 Writing Programs

It also describes the auxiliary functions and control functions for program creation.

Chapter 6 Arm 3D View Window

Describes operation of arm 3D viewing and handling 3D data to check for collisions with peripheral equipment.

Chapter 7 Online Functions

Describes the online functions (monitoring and debugging) of WINCAPS III. Describes monitor functions for checking robot status and debugging functions to directly debug robot controller programs on your PC.

Chapter 8 Logging

Describes the log functions of WINCAPS III. Describes error logs, operation logs, control logs and other types and log acquisition timing using such devices as error triggers.

Chapter 9 Vision Manager

Describes vision functions using the μVision optional viewing device for WINCAPS III.

Chapter 10 Appendices

Contains related information.

SAFETY PRECAUTIONS

Be sure to observe all of the following safety precautions.

Strict observance of these warning and caution indications are a MUST for preventing accidents, which could result in bodily injury and substantial property damage. Make sure you fully understand all definitions of these terms and related symbols given below, before you proceed to the text itself.

⚠ **WARNING**	Alerts you to those conditions, which could result in serious bodily injury or death if the instructions are not followed correctly.
⚠ **CAUTION**	Alerts you to those conditions, which could result in minor bodily injury or substantial property damage if the instructions are not followed correctly.

Terminology and Definitions

Maximum space: Refers to the space which can be swept by the moving parts of the robot as defined by the manufacturer, plus the space which can be swept by the end-effector and the workpiece. (Quoted from the ISO 10218-1:2006.)

Restricted space: Refers to the portion of the maximum space restricted by limiting devices (i.e., mechanical stops) that establish limits which will not be exceeded. (Quoted from the ISO 10218-1:2006.)

Motion space: Refers to the portion of the restricted space to which a robot is restricted by software motion limits. The maximum distance that the robot, end-effector, and workpiece can travel after the software motion limits are set defines the boundaries of the motion space of the robot. (The "motion space" is DENSO WAVE-proprietary terminology.)

Operating space: Refers to the portion of the restricted space that is actually used while performing all motions commanded by the task program. (Quoted from the ISO 10218-1:2006.)

Task program: Refers to a set of instructions for motion and auxiliary functions that define the specific intended task of the robot system. (Quoted from the ISO 10218-1:2006.)

1. Introduction

This section provides safety precautions to be observed for the robot system.

The installation shall be made by qualified personal and should confirm to all national and local codes.

2. Warning Labels

The robot unit and controller have warning labels. These labels alert the user to the danger of the areas on which they are pasted. Be sure to observe the instructions printed on those labels.

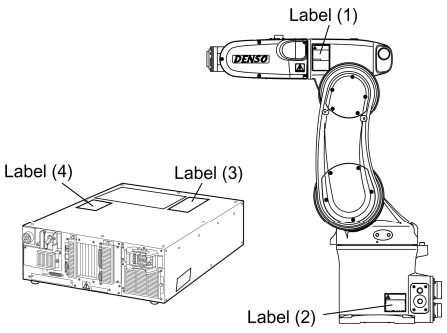

(Example: Location of labels)

Warning label	Instructions printed on the label
 Label (1)	Risk of injury. Never enter the restricted space.
<Except HM> <HM>  Label (2)	<u>For UL-Listed robot units only</u> Risk of injury. This label alerts the user that pressing the brake release switch could drop the arm.
 Label (3)	Risk of electrical shock. Never open the controller cover when the power is on. Never touch the inside of the controller for at least 3 minutes even after turning the power off and disconnecting the power cable.
 Label (4)	Risk of injury. Be sure to perform lockout/tagout before starting servicing. Turning the power ON when a person is inside the safety fence may move the arm, causing injuries.

3. Installation Precautions

3.1 Insuring the proper installation environment

■ **For standard type and cleanroom type**

The standard and cleanroom types have not been designed to withstand explosions, dust-proof, nor is it splash-proof. Therefore, it should not be installed in any environment where:

(1) there are flammable gases or liquids,

(2) there are any shavings from metal processing or other conductive material flying about,

(3) there are any acidic, alkaline or other corrosive material,

(4) there is a mist,

(5) there are any large-sized inverters, high output/high frequency transmitters, large contactors, welders, or other sources of electrical noise.

■ **For dust- & splash-proof type**

The dust- & splash-proof type has an IP54-equivalent structure, but it has not been designed to withstand explosions. (The HM/HS-G-W and the wrist of the VM/VS-G-W are an IP65-equivalent dust- and splash-proof structure.)

Note that the robot controller is not a dust- or splash-proof structure. Therefore, when using the robot controller in an environment exposed to mist, put it in an optional protective box.

The dust- & splash-proof type should not be installed in any environment where:

(1) there are any flammable gases or liquids,

(2) there are any acidic, alkaline or other corrosive material,

(3) there are any large-sized inverters, high output/high frequency transmitters, large contactors, welders, or other sources of electrical noise,

(4) it may likely be submerged in fluid,

(5) there are any grinding or machining chips or shavings,

(6) any machining oil not specified in this manual is in use, or

Note: Yushiron Oil No. 4C (non-soluble) is specified.

(7) there is sulfuric cutting or grinding oil mist.

3.2 Service space

The robot and peripheral equipment should be installed so that sufficient service space is maintained for safe teaching, maintenance, and inspection.

3.3 Control devices outside the robot's restricted space

The robot controller, teach pendant and mini-pendant should be installed outside the robot's restricted space and in a place where you can observe all of the robot's movements and operate the robot easily.

3.4 Positioning of gauges

Pressure gauges, oil pressure gauges and other gauges should be installed in an easy-to-check location.

3.5 Protection of electrical wiring and hydraulic/pneumatic piping

If there is any possibility of the electrical wiring or hydraulic/pneumatic piping being damaged, protect them with a cover or similar item.

3.6 Grounding resistance

The protective grounding resistance of the robot power supply should not be more than 100Ω.

3.7 Positioning of emergency stop switches

Emergency stop switches should be provided in a position where they can be reached easily should it be necessary to stop the robot immediately.

(1) The emergency stop switches should be red.

(2) Emergency stop switches should be designed so that they will not be released after pressed, automatically or mistakenly by any other person.

(3) Emergency stop switches should be separate from the power switch.

3.8 Positioning of operating status indicators

Operating status indicators should be positioned in such a way where workers can easily see whether the robot is on a temporary halt or on an emergency or abnormal stop.

Note: The UL-Listed robot units have motor ON lamps on their robot arms.

3.9 Setting-up a safety fence

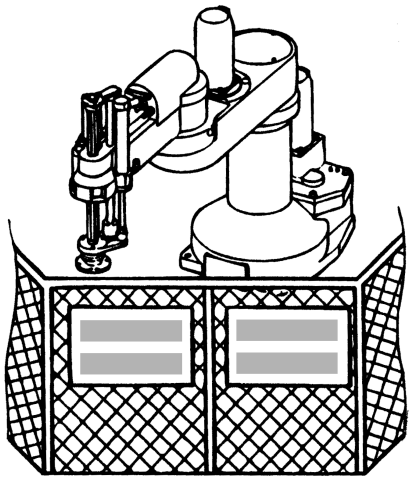

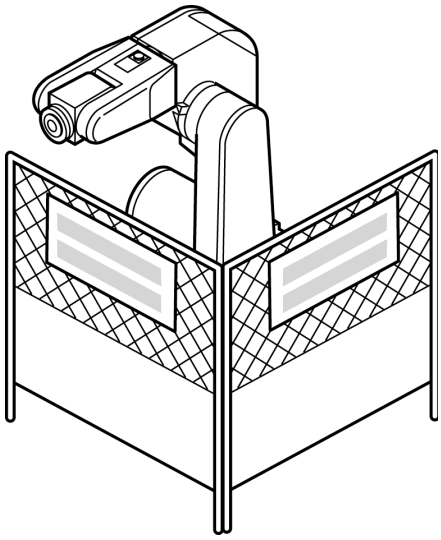

A safety fence should be set up so that no one can easily enter the robot's restricted space.

(1) The fence should be constructed so that it cannot be easily moved or removed.

(2) The fence should be constructed so that it cannot be easily damaged or deformed through external force.

(3) Establish the exit/entrance to the fence. Construct the fence so that no one can easily get past it by climbing over the fence.

(4) The fence should be constructed to ensure that it is not possible for hands or any other parts of the body to get through it.

(5) Take any one of the following protections for the entrance/ exit of the fence:

1) Place a door, rope or chain across the entrance/exit of the fence, and fit it with an interlock that ensures the emergency stop device operates automatically if it is opened or removed.

2) Post a warning notice at the entrance/exit of the fence stating "In operation--Entry forbidden" or "Work in progress--Do not operate" and ensure that workers follow these instructions at all times.

When making a test run, before setting up the fence, place an overseer in a position outside the robot’s restricted space and one in which he/she can see all of the robot’s movements. The overseer should prevent workers from entering the robot's restricted space and be devoted solely to that task.

3.10 Setting the robot's motion space

The area required for the robot to work is called the robot's operating space.

If the robot’s motion space is greater than the operating space, it is recommended that you set a smaller motion space to prevent the robot from interfering or disrupting other equipment.

Refer to the INSTALLATION & MAINTENANCE GUIDE, Chapter 2.

3.11 No robot modification allowed

Never modify the robot unit, robot controller, teach pendant or other devices.

3.12 Cleaning of tools

If your robot uses welding guns, paint spray nozzles, or other end-effectors requiring cleaning, it is recommended that the cleaning process be carried out automatically.

3.13 Lighting

Sufficient illumination should be assured for safe robot operation.

3.14 Protection from objects thrown by the end-effector

If there is any risk of workers being injured in the event that the object being held by the end-effector is dropped or thrown by the end-effector, consider the size, weight, temperature and chemical nature of the object and take appropriate safeguards to ensure safety.

3.15 Affixing the warning label

Place the warning label packaged with the robot on the exit/entrance of the safety fence or in a position where it is easy to see.

3.16 Posting the moving directions of all axes

Post a notice showing axes names and moving directions in a visible location on the robot unit. The posted moving directions should match the actual directions.

No posting or wrong direction posting may result in bodily injuries or property damages due to incorrect operation.

4. Precautions while Robot is Running

⚠ Warning

Touching the robot while it is in operation can lead to serious injury. Please ensure the following conditions are maintained and that the cautions listed from Section 4.1 and onwards are followed when any work is being performed.

⚠WARNING
Part No. 410985-411※
衝突の恐れあり。可動制限領域内に入るな。
Risk of injury. Do not enter restricted space.
Unfallgefahr! Nicht die Sperrzone betreten.
충돌의 우려가 있음. 가동 제한 영역 내에 들어가지 말 것.
有碰撞危险。不要进入可动限制领域内。

1) Do not enter the robot's restricted space when the robot is in operation or when the motor power is on.
2) As a precaution against malfunction, ensure that an emergency stop device is activated to cut the power to the robot motor upon entry into the robot's restricted space.
3) When it is necessary to enter the robot's restricted space to perform teaching or maintenance work while the robot is running, ensure that the steps described in Section 4.3 "Ensuring safety of workers performing jobs within the robot's restricted space" are taken.

4.1 Creation of working regulations and assuring worker adherence

When entering the robot's restricted space to perform teaching or maintenance inspections, set "working regulations" for the following items and ensure workers adhere to them.

(1) Operating procedures required to run the robot.

(2) Robot speed when performing teaching.

(3) Signaling methods to be used when more than one worker is to perform work.

(4) Steps that must be taken by the worker in the event of a malfunction, according to the contents of the malfunction.

(5) The necessary steps for checking release and safety of the malfunction status, in order to restart the robot after robot movement has been stopped due to activation of the emergency stop device

(6) Apart from the above, any steps below necessary to prevent danger from unexpected robot movement or malfunction of the robot.

1) Display of the control panel (See Section 4.2 on the next page.)
2) Assuring the safety of workers performing jobs within the robot's restricted space (See Section 4.3 on the next page.)
3) Maintaining worker position and stance

   Position and stance that enables the worker to confirm normal robot operation and to take immediate refuge if a malfunction occurs.

4) Implementation of measures for noise prevention
5) Signaling methods for workers of related equipment
6) Types of malfunctions and how to distinguish them

Please ensure "working regulations" are appropriate to the robot type, the place of installation and to the content of the work.

Be sure to consult the opinions of related workers, engineers at the equipment manufacturer and that of a labor safety consultant when creating these "working regulations".

4.2 Display of operation panel

To prevent anyone other than the worker from accessing the start switch or the changeover switch by accident during operation, display something to indicate it is in operation on the operation panel or teach pendant. Take any other steps as appropriate, such as locking the cover.

4.3 Ensuring safety of workers performing jobs within the robot's restricted space

When performing jobs within the robot's restricted space, take any of the following steps to ensure that robot operation can be stopped immediately upon a malfunction.

(1) Ensure an overseer is placed in a position outside the robot's restricted space and one in which he/she can see all robot movements, and that he/she is devoted solely to that task.
   ① An emergency stop device should be activated immediately upon a malfunction.
   ② Do not permit anyone other than the worker engaged for that job to enter the robot's restricted space.

(2) Ensure a worker within the robot's restricted space carries the portable emergency stop switch so he/she can press it (the emergency button on the teach pendant) immediately if it should be necessary to do so.

4.4 Inspections before commencing work such as teaching

Before starting work such as teaching, inspect the following items, carry out any repairs immediately upon detection of a malfunction and perform any other necessary measures.

(1) Check for any damage to the sheath or cover of the external wiring or to the external devices.

(2) Check that the robot is functioning normally or not (any unusual noise or vibration during operation).

(3) Check the functioning of the emergency stop device.

(4) Check there is no leakage of air or oil from any pipes.

(5) Check there are no obstructive objects in or near the robot's restricted space.

4.5 Release of residual air pressure

Before disassembling or replacing pneumatic parts, first release any residual air pressure in the drive cylinder.

4.6 Precautions for test runs

Whenever possible, have the worker stay outside of the robot's restricted space when performing test runs.

4.7 Precautions for automatic operation

(1) At start-up

Stay out of the safeguarded space with a safety fence when starting the robot; in particular, take extra caution in Internal automatic operation.

Before starting the robot, check the following items as well as setting the signals to be used and perform signaling practice with all related workers.

1) Check that there is no one inside the safeguarded space (with a safety fence).
2) Check that the teach pendant and tools are in their designated places.
3) Check that no lamps indicating a malfunction on the robot or related equipment are lit.

(2) Check that the display lamp indicating automatic operation is lit during automatic operation.

(3) Steps to be taken when a malfunction occurs

Stop the robot's operation by activating the emergency stop device when it is necessary to enter the safeguarded space with a safety fence to perform emergency maintenance in the case of malfunction of the robots or related equipment.

Take any necessary steps such as posting a notice on the start switch to indicate work is in progress to prevent anyone from accessing the robot.

4.8 Precautions in repairs

(1) Do not perform repairs outside of the designated range.

(2) Under no circumstances should the interlock mechanism be removed.

(3) When opening the robot controller's cover for battery replacement or any other reasons, always turn the robot controller power off and disconnect the power cable.

(4) Use only spare tools specified in this manual.

5. Daily and Periodical Inspections

(1) Be sure to perform daily and periodical inspections. Before starting jobs, always check that there is no problem with the robot and related equipment. If any problems are found, take any necessary measures to correct them.

(2) When carrying out periodical inspections or any repairs, maintain records and keep them for at least 3 years.

6. Management of Floppy Disks

(1) Carefully handle and store the "Initial settings" floppy disks packaged with the robot, which store special data exclusively prepared for your robot.

(2) After finishing teaching or making any changes, always save the programs and data onto floppy disks.

Making back-ups will help you recover if data stored in the robot controller is lost due to the expired life of the back-up battery.

(3) Write the names of each of the floppy disks used for storing task programs to prevent incorrect disks from loading into the robot controller.

(4) Store the floppy disks where they will not be exposed to dust, humidity and magnetic field, which could corrupt the disks or data stored on them.

7. Safety Codes

The safety standards relating to robot systems are listed below.

As well as observing the safety precautions given in this manual, ensure compliance with all local and national safety and electrical codes for the installation and operation of the robot system.

Standards	Title
ANSI/RIA R15.06-1999	Industrial Robots and Robot Systems--Safety Requirements
ANSI/UL1740: 1998	Safety for Robots and Robotic Equipment
CAN/CSA Z434-03	Industrial Robots and Robot Systems--General Safety Requirements
ISO10218-1: 2006	Robots for industrial environments--Safety requirements--Part 1: Robot
NFPA 79: 2002	Electrical Standard for Industrial Machinery

8. Battery Recycling

DENSO Robot uses lithium batteries.

Discard batteries according to your local and national recycling law.

廢電池請回收

EU

CONTENTS

Chapter 1 Overview 1
1.1 WINCAPS III Features 1
1.2 Robot Controller and WINCAPS III Versions 1
1.3 Product Components and Operating Environment 2
1.3.1 Product components 2
1.3.2 Operating environment 2
1.3.3 License certificate and user registration 2
1.3.4 WINCAPS III trial and light versions 3
1.3.5 Note on languages 3
1.4 Installing WINCAPS III 4
1.4.1 Before you begin 4
1.4.2 Installing WINCAPS III 4
1.4.3 Registering license 6
1.4.4 Uninstalling 7
1.5 Connecting to Robot Controller 8
Chapter 2 Basic Functions and Operational Flow 9
2.1 WINCAPS III Basic Functions 9
2.2 Steps in Writing Robot Programs 10
2.3 User Levels and Access Rights 12
Chapter 3 Starting Up/Shutting Down 13
3.1 Loading WINCAPS III 13
3.1.1 WINCAPS III basic settings 14
3.1.2 Programmer password 17
3.2 WINCAPS III Screen Descriptions 19
3.2.1 Screen components 19
3.2.2 Menu items 21
3.2.3 Toolbars 30
3.2.4 Docking view 32
3.2.5 Program view 38
3.2.6 Screen operations 41
3.3 Quitting WINCAPS III 49
Chapter 4 Creating a Project 50
4.1 Overview 50
4.1.1 Folders 50
4.2 Creating a New Project 51
4.3 Opening an Existing Project 53
4.4 Saving Project 53
4.5 Configuring a Project 54
4.6 Configuring Parameters 58
4.7 Link with Robot Controller 59
4.7.1 Communications settings 59
4.7.2 Data transfers 60
4.7.3 Arm parameter data transfer 63
4.8 USB Tool 64
4.8.1 Reading data from USB memory 64
4.8.2 Writing data into USB memory 67
4.9 Print 69

Chapter 5 Writing Programs 70
5.1 Creating a New Program 70
5.2 Leveraging Existing Files 71
5.3 Saving a Program 72
5.4 Editing a Program 73
5.4.1 Finding and replacing strings 74
5.4.2 Other editing functions 75
5.5 Program Bank 82
5.5.1 Adding a program to a project 82
5.5.2 Adding a program to the program bank 83
5.5.3 Adding a category 84
5.6 Editing a Teach Pendant (TP) Panel 85
5.6.1 Editing a TP panel 85
5.7 Folder Functions 86
5.7.1 Creating a folder 86
5.7.2 Importing an entire folder 87
5.8 Making Executables 88
5.8.1 Checking syntax 88
5.8.2 Making executables 89

Chapter 6 Arm 3D View Window 90
6.1 Screen Descriptions 90
6.1.1 Arm 3D view 90
6.1.2 Arm modeling 92
6.1.3 Arm operation 94
6.2 Simple Modeling 95
6.2.1 Adding objects 96
6.2.2 Saving objects 100
6.2.3 Importing objects 101
6.3 Importing 3D Data 102

Chapter 7 Online Functions 103
7.1 Overview 103
7.1.1 Monitoring and debugging 103
7.2 Monitoring 104
7.2.1 Initiating monitoring 104
7.2.2 Monitoring variables 105
7.2.3 Monitoring I/O 108
7.2.4 Monitoring robot 109
7.2.5 Errors during monitoring 109
7.2.6 Validate the controller function extension 110
7.3 Using Debugging 111
7.3.1 Initiating debugging 111
7.3.2 Launch the program from WINCAPS III. 114
7.3.3 Controller settings 115
7.3.4 Input signal dummy operation 116

Chapter 8 Logging 120
8.1 Log record timing 121
8.1.1 Recording by program commands 122
8.1.2 Error trigger log 123
8.2 Acquisition of log data 124
8.2.1 Log acquisition settings 125
8.3 Detailed description of log types 126
8.3.1 Error log 126

8.3.2 Operation log 127
8.3.3 Control log 128
8.3.4 Trace logging (single / multi) 132
8.3.5 Variable log 135
8.3.6 I/O log 136
8.3.7 Joint servo log for particular joint 137

Chapter 9 Vision Manager 138

9.1 Overview 138
9.1.1 Screen descriptions 138
9.2 Configuring Vision Manager 141
9.2.1 Configuring lookup tables 141
9.2.2 Editing a macro name 142
9.2.3 Calibrating 143
9.2.4 Configuring camera input 148
9.2.5 Switching display screens 150
9.2.6 Editing a window 151
9.2.7 Editing a search model 154
9.2.8 Registering digitization 157
9.2.9 Calculating area, center of gravity, and principal axis 161
9.2.10 Labeling 164
9.2.11 Edge detection 167
9.2.12 Model search 172
9.2.13 Reading a QR Code symbol 175

Chapter 10 Appendices 177

10.1 List of Prohibited Characters 177

Chapter 1 Overview

1.1 WINCAPS III Features

WINCAPS III is a package for efficiently developing and validating Denso robot operation programs (PACs). It permits checking of robot operation, variables, and I/O from a computer connected to the robot controller. It also supports managing program files as projects, storing frequently used programs in program banks, and various other program management functions.

1.2 Robot Controller and WINCAPS III Versions

Use the same version of WINCAPS III as that of the robot controller software.

If the WINCAPS III and robot controller software versions differ, connection may not be possible and usable functions may be limited.

- If the version of the robot controller software is more recent than that of WINCAPS III
  In such cases it is necessary to update WINCAPS III with the WINCAPS III trial version that comes with the robot set. The license is unchanged.
- If the version of the robot controller software is older than that of WINCAPS III
  Ver.2.0 and higher of the robot controller can be used. However, functions not compatible with the controller cannot be used.
  In addition, match the version of the output code selected in the Project Properties (select Property from the Project menu and use the Compile tab displayed in the dialog box) to that of the robot controller software connected to.

Note

The following functions cannot be used with versions older than Ver.2.6 of the robot controller software.

- Certain log functions (trace log (single / multi), variables log, I/O log)
- Online (debugging) functions
  For versions of robot controller software prior to Ver.2.0, use WINCAPS II.

1.3 Product Components and Operating Environment

1.3.1 Product components

Your WINCAPS III package should contain the following items.

Software

WINCAPS III Installer Product CD-ROM

License certificate

The WINCAPS III license is written on this. The reverse is a user registration card.

Instruction manual (printed versions optional)

WINCAPS III Guide (this document)

The software Help function contains the WINCAPS III Guide (this manual).

1.3.2 Operating environment

WINCAPS III requires the following computer environment to operate effectively.

Operating System

Windows XP or Vista

CPU

Pentium 4 or later

Memory

512 megabytes or more

Hard disk drive

500 megabytes or more free

Others

A graphics processing unit (GPU) is recommended for displaying 3D data.

1.3.3 License certificate and user registration

1) Retaining License for Service
   The User ID on the license identifies your copy of this product. It is required for after-sales service, so file the license for future reference.
2) User Registration
   User registration holds the key to our efforts to provide the best possible after-sales service. Registration ensures timely arrival of notification of technical enhancements and upgrade availability.

   #### Procedure

   To register as a user, use the web address given on license.

1.3.4 WINCAPS III trial and light versions

WINCAPS III is available in the trial and light versions in addition to the product version.

Trial and Light Versions	Difference from Product Version
WINCAPS III Light version	• This comes with the optional mini-pendant purchased. • Unavailable functions Printing, arm player Plus, 3D data import, monitoring interval setting, a part of program bank
WINCAPS III Trial version	• This comes with the robot set purchased. • Unavailable functions Only a program named "PRO1.pac" is editable.

Note

- The trial and light versions show "Trial" and "Light" on the status bar at the bottom of the screen, respectively.
- Entering the license key of the product version to the trial or light version makes it available as a product version.

1.3.5 Note on languages

Use the same language for WINCAPS III and the robot controller.

Otherwise, different encodings can lead to the following problems when receiving data from the robot controller, when opening projects, etc.

- Editing and saving programs or string variables with garbled text can corrupt data.
- Project and file names can be garbled, making it impossible to open the project.

1.4 Installing WINCAPS III

1.4.1 Before you begin

Always uninstall any existing WINCAPS III versions before installing a new version on your computer.
For the procedure, refer to 1.4.4 "Uninstalling" (P. 7).

Note

Be sure to shut down all other applications before installing or uninstalling this software.

1.4.2 Installing WINCAPS III

The following is the procedure for installing this software.

Operating procedure

1. **First shut down all Windows applications.**
2. **Load the installer.**

   Insert the product CD into the computer CD-ROM drive and wait for the following set-up screen to appear.

WINCAPS III Setup
DENSO
Install WINCAPS III
WINCAPS III
Programming tool for DENSO ROBOT
This product is protected by Japan Copyright Law and International Agreement. Reproduction of whole or part of this product or distribution of copies without written consent constitutes violation of copyright.
Close

Note

If the set-up screen is not displayed, right-click on the CD-ROM drive under My Computer and choose Open on the menu that appears. Double-click on setup.exe on the CD-ROM file list to display the set-up screen.

3. Press the install WINCAPS III button to display the WINCAPS III - InstallShield Wizard dialog box.

Follow the screen instructions to configure the installation.

WINCAPS III - InstallShield Wizard
Welcome to the InstallShield Wizard for WINCAPS III
The InstallShield Wizard will install WINCAPS III on your computer. To continue, click Next.
< Back
Next >
Cancel

There are three items to specify.

1) Acceptance of the end user license agreement (EULA)
2) License key input
3) Select the folder where the program is installed.

Note

The installer may take a while before starting installation of WINCAPS III since it installs components required for communication and 3D drawing prior to WINCAPS III.

4. Double-check the folder specification and press the OK button.

Proceed with the install operation.

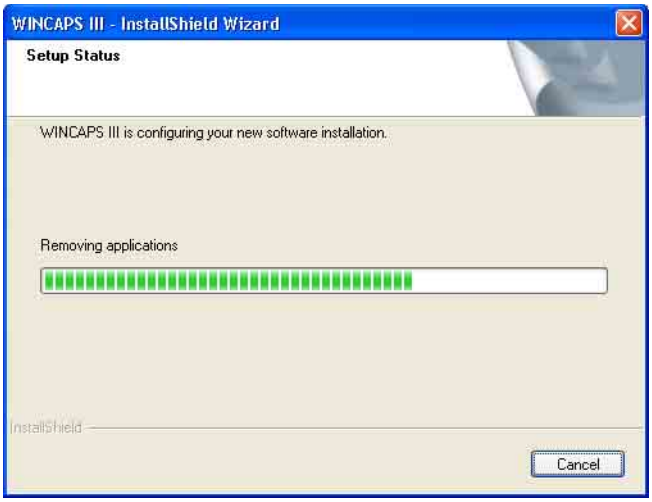

Note

Restart the computer if the installation process ends with a message advising you to do so.

If the required modules are not installed, these will be installed prior to WINCAPS III. Some modules may require you to restart the computer; return to WINCAPS III installation after having done so.

1.4.3 Registering license

During installation a License Information dialog box will appear.

Enter the user ID printed on the license included with the product to the License Key field, and press the Add button.

Input the license key printed on the installation disc label for Light or Trial versions.

If the user ID appears under License Key, press the Close button.

Note

- Skipping over this license registration process loads WINCAPS III in test drive mode with limited functionality.
- To register at a later date, choose Help|License... to display the above dialog box.

1.4.4 Uninstalling

The following is the procedure for uninstalling this software.

Operating procedure

1. From the Start menu, choose Settings|Control panel and then Add or Remove programs.

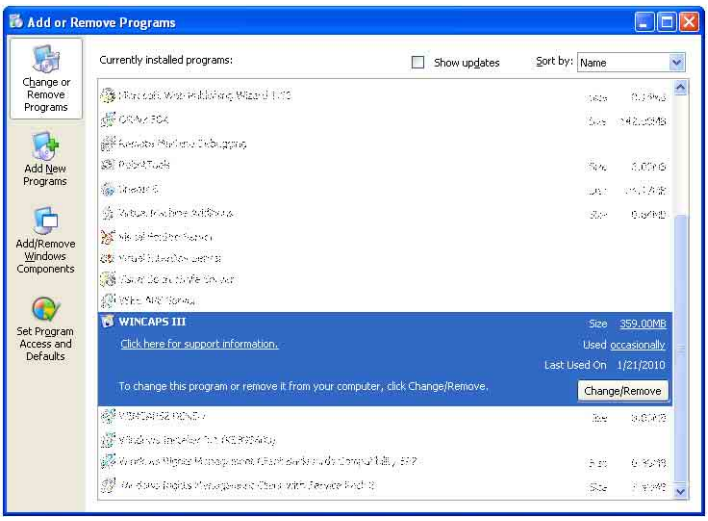

2. Choose WINCAPS III and then press the Change/Remove button to display a confirmation dialog box.

3. Press the OK button to proceed with the uninstall operation.

Note

- If a dialog box appears warning of shared files, press the Leave all button.
- Installing WINCAPS III installs also ORiN2 SDK automatically; however, uninstalling WINCAPS III does not uninstall ORiN2 SDK. To uninstall ORiN2 SDK, first check that no other applications use ORiN and then uninstall ORiN2 SDK using the same procedure as above.

1.5 Connecting to Robot Controller

There are two ways to connect the computer to a robot controller.

Ethernet connection

This method uses an LAN interface (CN4) to connect the computer to the robot controller.

Direct connection

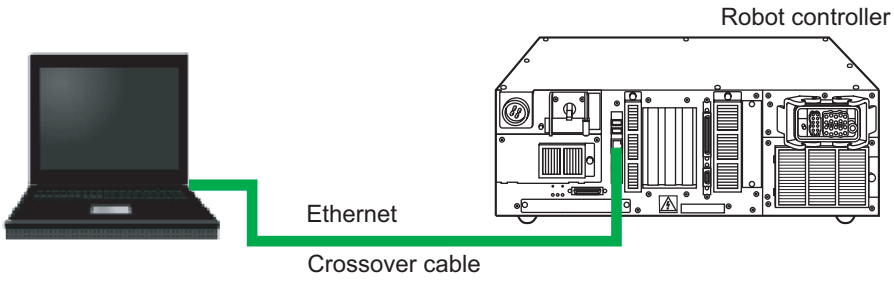

Connection via a hub

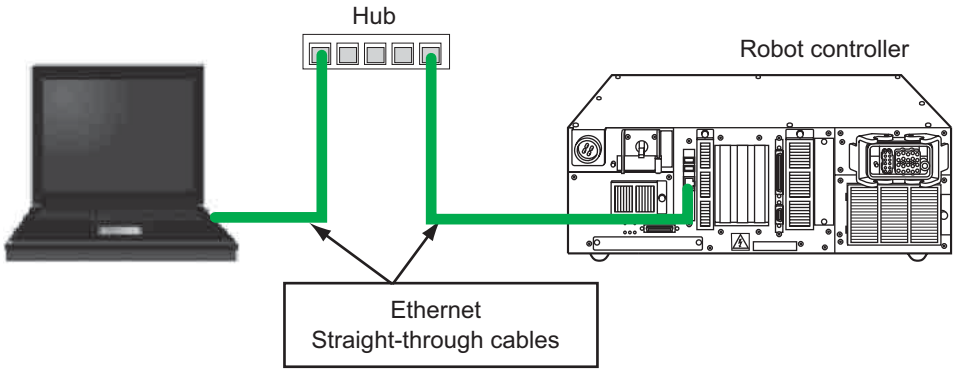

RS-232C connection

This method uses a serial port (CN1) to connect the computer to the robot controller.

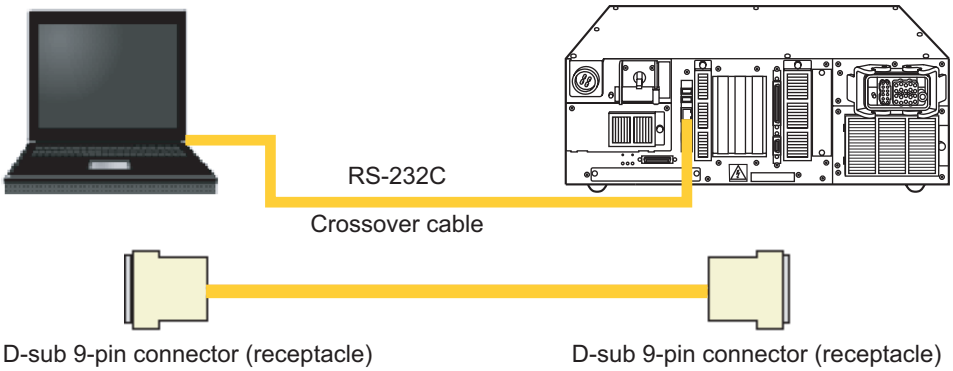

Chapter 2 Basic Functions and Operational Flow

2.1 WINCAPS III Basic Functions

The following describes the product's basic functions.

Communications

Communicating with a robot controller over an Ethernet or serial link.

Writing programs

Program using a PAC editor. For further details on programs, please refer to the programming manual.
The editor provides the following functions.

- Displaying line numbers
- Color-coded syntax highlighting
- Easy command input using an automatically scrolling list
- Automatic indenting
- Comment blocks
- Bookmarks

Program bank

This library holds programs covering handy DENSO robot functionality. For further details on programs, please refer to Programming Manual II.

Users can customize programs registered in the program bank. They can also add their own.

Online monitoring

WINCAPS III monitors controller status, providing immediate access to variables, I/O values, and other quantities.

Online debugging

WINCAPS III shifts control from the robot controller, allowing the operator to run robot programs held in the robot controller from the computer running WINCAPS III.

Breakpoints, Step check, and other debugging facilities allow checking variables and I/O during operation.

Arm 3D View

This is for visualizing the robot motion and posture on the PC screen. Loading 3D data or creating simple objects enables the user to check interference with the equipment and movements of workpieces and tools without running the actual robot.

Logging

The following functions for logging variables, I/O values, and error messages are available for efficient program debugging.

- Error log
- Operation log
- Control log
- Trace log
- Variable log
- I/O log
- Single servo data log

2.2 Steps in Writing Robot Programs

The following shows the WINCAPS III work flow for writing a program and validating its operation.

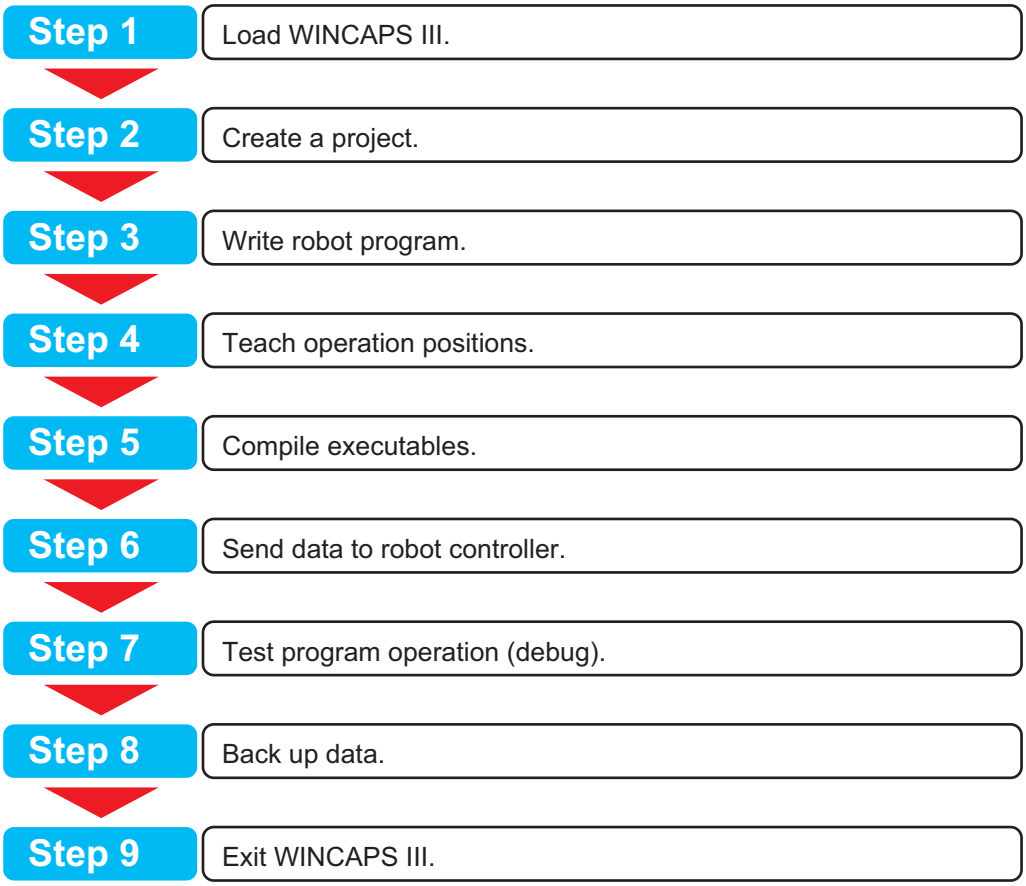

Step 1: Load WINCAPS III.

Launch WINCAPS III.

For further details, refer to Chapter 3 "Starting Up/Shutting Down" (P. 13).

Step 2: Create a project.

This project contains all necessary data for the target robot.

For further details, refer to Chapter 4 "Creating a Project" (P. 50).

Step 3: Write robot program.

Write the robot operation program using the built-in editor.

For further details, refer to Chapter 5 "Writing Programs" (P. 70).

Step 4: Teach operation positions.

Specify operation positions by manipulating the virtual robot in the Arm 3D view window.

For further details, refer to Chapter 6 "Arm 3D View Window" (P. 90).

Note

Using simple modeling and importing 3D data creates an on-screen simulation for specifying the robot's operation range and detecting collisions with surrounding equipment.

Step 5: Compile executables.

The compiler converts project programs to executables for execution by the robot controller.

For further details, refer to Chapter 5 "Writing Programs" (P. 70).

Step 6: Send data to robot controller.

Connect to the robot controller and send it the data necessary for robot operation.

For further details, refer to 4.7 "Link with Robot Controller" (P. 59).

Step 7: Test program operation (debug).

Use WINCAPS III online functions to examine program flow, determine the robot's operation range, and detect collisions with surrounding equipment. Modify the program to eliminate any problems detected. Repeat the compile-debug cycle until no such problems remain.

For further details, refer to Chapter 7 "Online Functions" (P. 103).

Note

- WINCAPS III directly controls robot controller program operation.
- Trace logging allows efficient validation of multitasking and other complex program flow as well as easy analysis of interactions with other programs.
- I/O logging simplifies timing adjustments with neighboring equipment for use in optimizing operation and reducing cycle times.

Step 8: Back up data.

Use WINCAPS III to save the robot controller's internal data in projects.

For further details, refer to 4.7.2 "Data transfers" (P. 60).

Step 9: Exit WINCAPS III.

For further details, refer to Chapter 3 "Starting Up/Shutting Down" (P. 13).

2.3 User Levels and Access Rights

WINCAPS III's two user access levels, operator and programmer, ensure data security by limiting access to advanced functionality and sensitive data.

The user specifies which on the log-in screen when WINCAPS III first starts.

For further details on logging in, refer to 3.1 "Loading WINCAPS III" (P. 13).

Operator level

Level enabling PAC program creation / editing and other basic operations.

It blocks changes to WINCAPS III settings.

It does not require a password.

Programmer level

Level enabling changes in project settings and other higher operations.

It allows changes to WINCAPS III settings.

It requires a password.

For further details on setting this password, refer to 3.1.2 "Programmer password" (P. 17).

Differences in functions due to user levels are as follows.

Function	Operator	Programmer
Creating a new project	○	○
Writing / editing programs	○	○
Data transfers	○	○
Online (monitoring/debugging functions)	○	○
Addition of controller function extension	○	○
Altering project properties	△*	○
Altering parameters	×	○
Reading / writing arm parameters	×	○

*Only communications settings can be changed

Note

Changing user levels while WINCAPS III is running requires returning to the dialog box for logging in.

Chapter 3 Starting Up/Shutting Down

3.1 Loading WINCAPS III

Operating procedure

1. On the Start menu, choose All Programs|DENSO FACTORY WARE|WINCAPS III|WINCAPS III to display the dialog box for logging in.

2. Specify user level and password.

The user level choices are 0-operator and 1-programmer.

The latter requires a password.

3. Press the Log in button to load WINCAPS III.

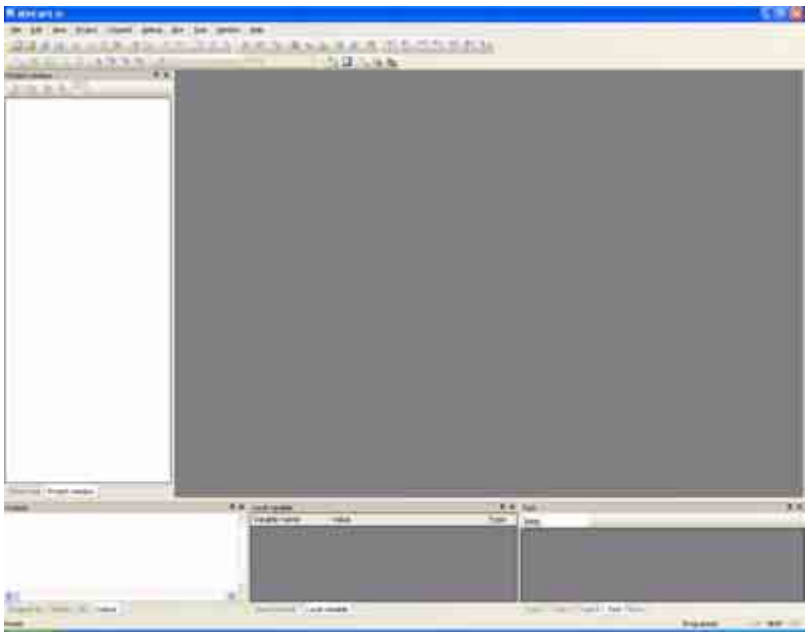

3.1.1 WINCAPS III basic settings

Operating procedure

1. Choose Tool|Option to display the dialog box for configuring such software options.

2. Click the tab containing the desired configuration option.

The dialog box has the following three tabs.

General tab

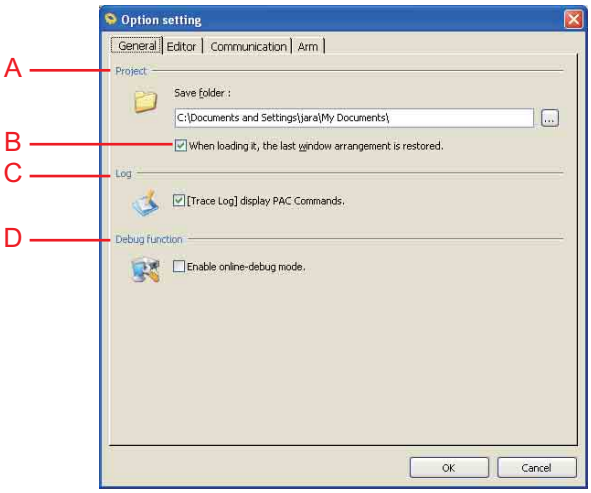

A: Project

This field specifies a folder for saving projects. This becomes the default folder for saving new projects.

B: When loading it, the last window arrangement is restored.

Opens project with the program window and 3D view window in the same place as when last closed.

C: Log

Selecting this check box adds a Code column displaying souce code to the Trace log window.

* Note that large logs can take considerable time to display.

D: Debug function

Selecting this check box enables debugging.

Note

- Leaving it deselected disables all debugging functions, so selecting one during online operation triggers an error message.
- WINCAPS III always starts with debugging disabled.

Editor tab

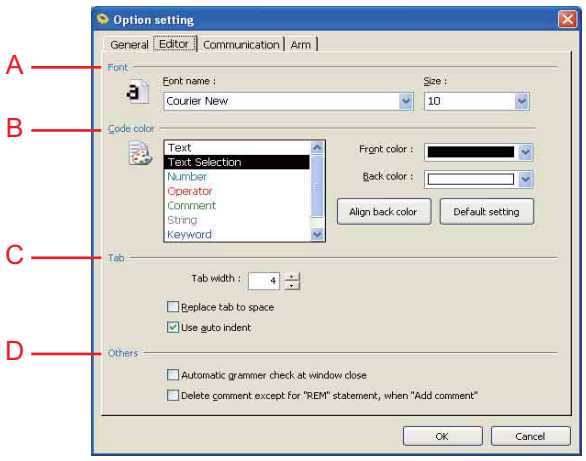

A: Font

This area specifies the font type and size for Program edit windows.

B: Code color

This area specifies the colors for highlighting text in the Program edit window. Select the text type, then choose text color with Front color and surrounding color as Back color.

C: Tab

This area specifies the tabs for Program edit windows.

D: Others

Selecting this check box automatically runs a syntax check on the selected program before closing the Program edit window. Select the check box to delete comments other than those in REM for Adding Comments.

Communication tab

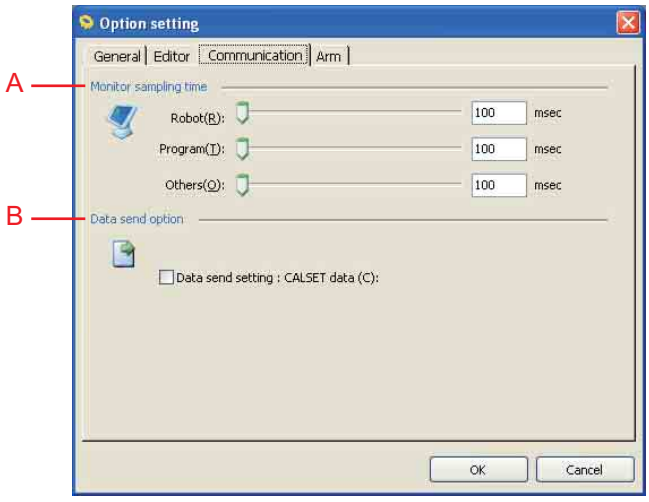

A: Monitor sampling time

This area specifies the intervals at which to monitor robot controller operation.

B: Data send option

The options in this area configure data transfers to the robot controller.

Arm tab

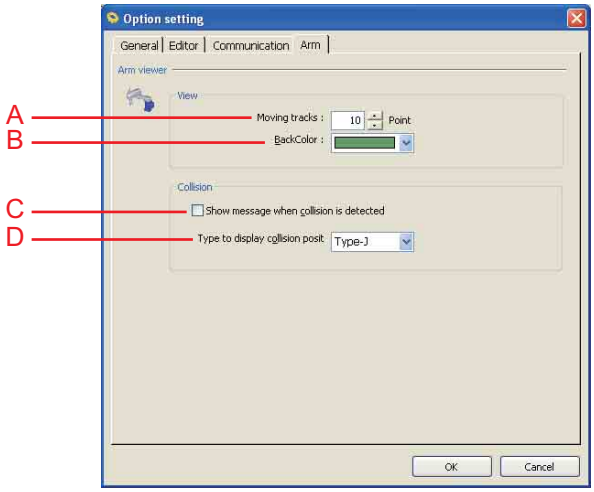

A: Moving tracks

Sets the point numbers for the robot operation trajectory displayed in the Arm 3D view window.

B: BackColor

This sets the Arm 3D View window background color.

C: Show message when collision is detected

Select to display the Collision dialog box when a collision is detected.

D: Type to display collision position

Choose the method of displaying the robot's position when a collision occurs.

3. When configuration is complete, press the OK button.

Pressing the Cancel button instead discards all changes.

Note

Moving to another tab does not save changes. To save your new settings, always press the OK button.

3.1.2 Programmer password

Using WINCAPS III at the programmer level requires logging in with a password.
Register one with your first login.

Note

Passwords are case sensitive.

3.1.2.1 Registering a password

Operating procedure

1. **In the Login WINCAPSIII dialog box, choose 1-programmer as the user level to enable password input.**

2. **Enter the desired password and press the Login button to display the dialog box for changing the password.**

3. **Re-enter the new password in the Review new password field and press the OK button to register the password.**

3.1.2.2 Changing the password

Operating procedure

1. **Choose Tool|Re-Login to display the dialog box for logging in.**

2. **Press the Chg. PW button to display the dialog box for changing the password.**

3. **Enter three passwords: the current password in the first field and the new one in the other two.**

4. **Press the OK button to update the password.**

3.2 WINCAPS III Screen Descriptions

3.2.1 Screen components

WINCAPS III uses the following general screen layout.

Note

WINCAPS III offers the user considerable flexibility in rearranging screen elements to match the needs at hand.

For further details on screen customization, refer to 3.2.6 "Screen operations" (P. 41).

The screen shots in this document use the default layout, so may not necessarily match what appears on your screen.

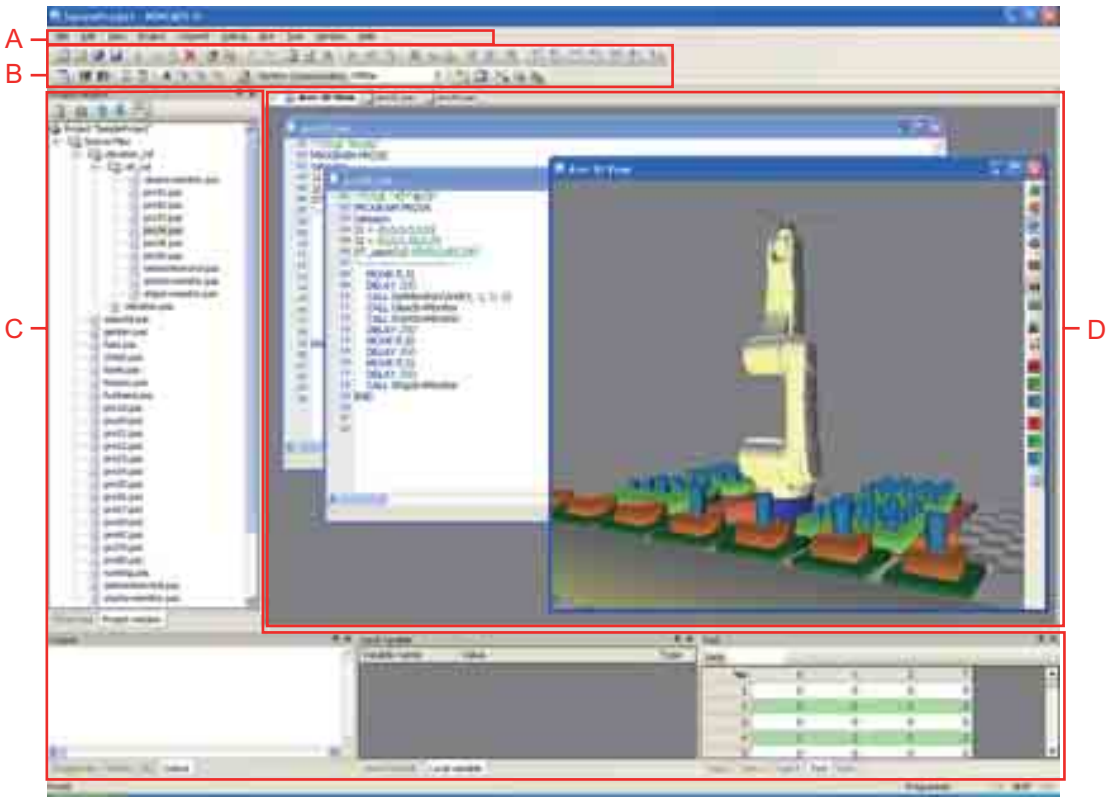

A: Menus

This area displays the following ten menu items available in WINCAPS III.

- File menu
- Edit menu
- View menu
- Project menu
- Connect menu
- Debug menu
- Arm menu
- Tool menu
- Window menu
- Help menu

For further details on menu items, refer to 3.2.2 "Menu items" (P. 21).

B: Toolbars

This area displays the following six toolbars that provide user alternate access to most menu items with button icons.

- Standard toolbar
- Edit toolbar
- View toolbar
- Link Mode toolbar
- Debug toolbar
- Log toolbar

For further details on toolbars, refer to 3.2.3 "Toolbars" (P. 30).

C: Docking view

The Docking view area displays various types of information windows showing the results of a project-wide search, compile error messages, variables and I/O values, etc.

For further details on the Docking view, refer to 3.2.4 "Docking view" (P. 32).

D: Program view

The Program view area displays the source code, Arm 3D View window, etc.

For further details on the Program view, refer to 3.2.5 "Program view" (P. 38).

3.2.2 Menu items

The following describes each WINCAPS III menu item.

3.2.2.1 File menu

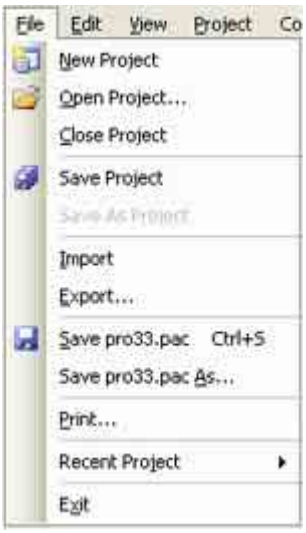

New Project

This is for creating a new project.

Open Project...

This is for opening an existing project.

Close Project

This closes the currently open project. If the project has program edits or other unsaved modifications, a dialog box asks whether you wish to save them.

Save Project

This saves the currently open project.

Save As Project

This is for saving the currently open project under a new name. It creates a folder under a specified name and copies all current project data into the folder.

Import

This is for reading in .csv files containing variables and log data exported from other projects.

Export...

This exports variables, I/O values, and log data in standard .csv format for use by other applications.

Save

This saves the program or header file selected in the Program view area.

Save As...

This saves the program or header file selected in the Program view area under a different name.

It adds saved file into a project.

Print...

This is for printing programs, variables, and a list of I/Os.

Recent Projects

This displays recently used projects.

Choosing one opens it.

Exit

This is for shutting down the program.

If the project has program edits or other unsaved modifications, a dialog box asks whether you wish to save them.

3.2.2.2 Edit menu

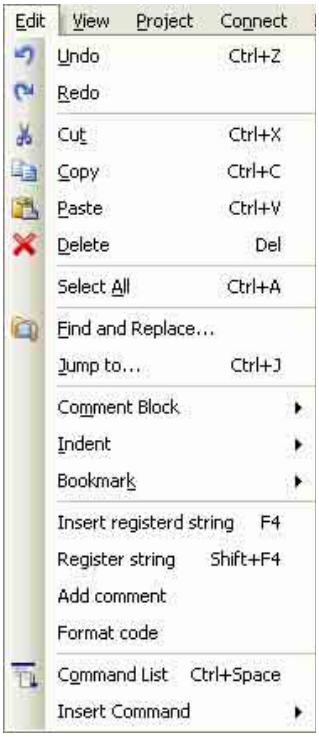

Undo

This cancels the last operation, returning edits to the preceding state.

Redo

This repeats the operation canceled with Undo.

Cut

This moves to the Windows clipboard and deletes the contents selected in the Program edit window.

Copy

This copies to the Windows clipboard the contents selected in the Program edit window.

It does not delete the original.

Paste

This copies the clipboard contents to the selected portion of the Program edit window.

Delete

This deletes the area selected in the Program edit window.

Select All

This selects the entire contents of the Program edit window.

Find and Replace...

This replaces occurrences of one string with another.

Jump to...

This is for moving the cursor to a line, specified by number, in the Program edit window.

Comment Block

This submenu converts the lines selected in the Program edit window to and from comments.

Indent

This submenu controls indenting of the lines selected in the Program edit window

Bookmark

This is for working with bookmarks.

Insert registered string

Previously registered character strings are placed in the program.

Register string

Commonly used character strings can be registered in advance and placed in programs through shortcuts.

Add comment

Selecting this automatically adds texts written in the application columns of variables and I/O lists to the source code as comments.

Format code

The program code is shaped into a standard form. Line indents are inserted and blank spaces inside the code added or deleted automatically.

Command List

Selecting this automatically displays a scrolling list of commands available with auto-completion at the cursor position.

Insert Command

This is for inserting a command selected from the command input list at the cursor position in the predetermined syntax.

3.2.2.3 View menu

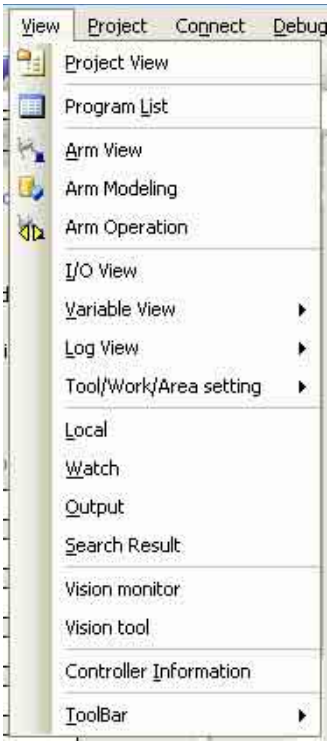

Project View

This displays the Project view window.

Program List

This displays the Program list window.

Arm View

This displays the Arm view window.

Arm Modeling

This displays the Arm modeling window.

Arm Operation

This displays the Arm operation window.

I/O View

This displays an I/O window in the Docking view area.

Variables View

This submenu displays variables of specified types in the Docking view area.

Log View

This submenu displays Log windows of specified types in the Program view area.

Tool/Work/Area setting

This submenu displays windows for specifying tools, work pieces, and areas.

Local

This displays local variables in the Docking view area.

Watch

This displays the Watch window in the Docking view area.

Output

This displays output in the Docking view area.

Search Result

The results are displayed when Search / replace is executed.

Vision monitor

This toggles display of the Vision monitor window.

Vision tool

This toggles display of the Vision tool window

Controller Information

This displays basic information of the controller.

ToolBar

This submenu controls the display of toolbars.

3.2.2.4 Project menu

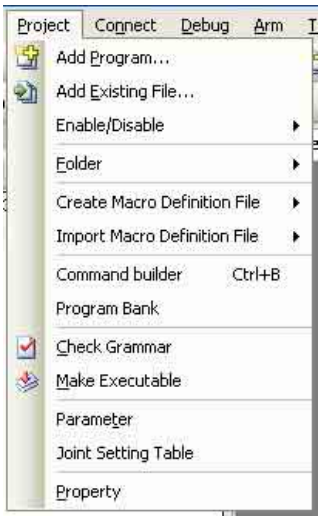

Add Program...

This is for creating a new program and adding it to the current project.

Add Existing File...

This submenu is for copying the selected program into the current project folder to add it in the project.

Enable/Disable

This submenu controls usage of a file within the project.

Enabled programs can be executables.

Folder

This submenu is for creating, renaming, and importing folders. Programs of other projects can be imported as folders.

Create Macro Definition File

This submenu is for creating header files defining macro names of variables and I/O ports.

Import Macro Definition File

This submenu is for reading the content of header files defining macro names to apply it to variables and I/O ports.

Command builder

This submenu is for displaying the Command builder dialog box to support PAC commands input.

Program Bank

This displays a dialog box with programs covering handy DENSO robot functionality.

Developers can also add their own work to this open-ended library.

Check Grammar

This runs a syntax check on the selected program. The results appear in an Output window.

Make Executable

This updates the executables for the project. An Output window tracks progress and error messages from the compiler.

Parameter

This displays the dialog box for specifying project parameters.

Joint Setting Table

This displays the dialog box for specifying joint settings. Axis settings are used in SMRT4G, MC2F and Added axes.

Property

This submenu displays the dialog box containing property sheets of communication, compile, variables, and I/O items for referring to them or configuring the project.

3.2.2.5 Connect menu

Transfer Data...

This is for exchanging data with the robot controller.

Connect Setting

This opens the Property dialog box to the Communications settings tab, the one for configuring the communications link for the project.

Monitor Communication

This submenu specifies the connection to the robot controller.

- Offline:
  WINCAPS III operates alone, without connecting to the robot controller.
- Monitoring:
  WINCAPS III connects to the robot controller and displays its internal data. Specify the data update intervals with Tool|Option.
- Debugging:
  WINCAPS III controls automatic program operation from the computer, debugging programs by modifying their variables and I/ O values as they run.

3.2.2.6 Debug menu

Note

The Debug menu is available in WINCAPS III connected with the robot controller version 2.7 or later.

Start all supervisor tasks

This starts all supervisory tasks.

Stop all supervisor tasks

This stops all supervisory tasks.

Start a task

This starts the selected program.

Step in

This executes one program step.

If a step includes CALL text, execution pauses at the first step in that function.

Continue all tasks

This resumes suspended tasks.

Halt

This suspends program execution.

Step-stop

Program execution runs through to the end of the current step.

Cycle-stop

Program execution runs through to the end of the current cycle.

Program reset

This returns the current program to its starting point.

Reset all tasks

This returns all programs to their starting points.

Show quick watch

This displays the current values of all variables and I/O ports currently selected in the Program edit window.

Register to watch

Add the currently selected quick watch items to the watch list in the Watch window.

Delete watch

This deletes the watch items selected in the Watch window.

Set/Reset a break point

This specifies whether program execution breaks at the step currently under the cursor in the Program edit window.

Reset all break points

This clears all breakpoints.

Break point stop setting

This specifies whether hitting a breakpoint pauses the current program only or all programs.

Set line to start/stop log

One way to specify a logging range is to select it in the Program edit window. Another is to specify starting or stopping for the current line in the Program edit window.

Get Single Trace Log

This displays the trace log for the specified program, a listing of the program steps executed and their execution times.

Controller settings

This submenu controls controller operation: turning motors and machine locks ON and OFF and specifying times for reading control logs.

3.2.2.7 Arm menu

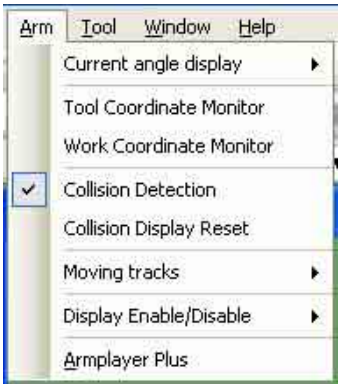

Current angle display

This submenu controls the display, in the Arm 3D View window, of current values for arm angle variables of types P, J, T, and J-EX. It also supports copying of those values.

Tool Coordinate Monitor

This toggles the display of the current tool number and coordinate axis in the Arm 3D view window.

Work Coordinate Monitor

This toggles the display of the current work number and coordinate axis in the Arm 3D view window.

Collision Detection

Selecting this toggles collision detection.

Collision Display Reset

This removes collision results from the display.

Moving tracks

Sets the display of the trajectory the flange tip moved through.

Display Enable/Disable

This submenu controls display of elements in the Arm 3D view window: floor, arm, tool, work, area, and obstacles.

Armplayer Plus

This displays the dialog box for checking the path for MOVE, APPROARCH, and other basic operations and calculating overall cycle times without connecting to the robot unit.

3.2.2.8 Tool menu



DIO Command Viewer

This displays the DIO command viewer dialog box for displaying standard command patterns or those with mini I/O assignments. During debugging, this dialog box also allows batch setting of command patterns for dummy I/O.

Controller extension

This is available only in the online monitoring mode.

USB

This is for reading or writing project data from/to a USB memory.

ARM-Parameter

Reads/writes arm parameters needed for controller settings.

Re-Login

This returns to the dialog box for logging in, the only way to changing user levels while WINCAPS III is running

Option

This displays the dialog box for configuring such software options as the editor's syntax highlighting colors and communications time out limits.

3.2.2.9 Window menu

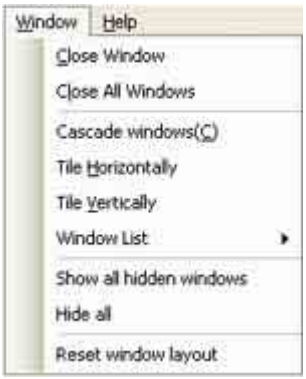

Close Window

This closes the program or header file selected in the Program view area.

Close All Windows

This closes the following Program view window types: Arm 3D view, Vision monitor, and Program edit.

Cascade windows

This stacks all windows of the above types so that they overlap each other, with the title bars visible, in the Program view area.

Tile Horizontally

This lines up all windows of the above types horizontally in the Program view area.

Tile Vertically

This lines up all windows of the above types vertically in the Program view area.

Window List

This submenu lists all windows of the above types currently open in the Program view area.

Show all hidden windows

This restores a minimized window to the original size.

Hide all

This minimizes all windows in the Docking view area to maximize the Program view area. Use this to maximize the Arm 3D view window or Program edit window.

Reset window layout

This returns windows to the default layout.

3.2.2.10 Help menu

WINCAPS III guide

This shows the WINCAPS III help.

License...

This shows the license information.

Version

This shows the version of WINCAPS III.

3.2.3 Toolbars

The toolbars provide user alternate access to most menu items with button icons.
Alternatively, you can save screen real estate by turning them off, all or individually.
There are six of these toolbars. The following lists map their buttons to the corresponding menu items.

Standard toolbar

A: New Project
B: Open Project...
C: Save Project
D: Save
E: Cut
F: Copy
G: Paste
H: Delete
I: Find...
J: Undo
K: Redo
L: Create Programs...
M: Check Syntax
N: Make Executable

Edit toolbar

A: Command List
B: Indent
C: Unindent
D: Encomment
E: Decomment
F: Set/Clear Bookmark
G: Next Bookmark
H: Previous Bookmark
I: Clear Bookmarks

View toolbar

A: Project View
B: Program list
C: Arm view
D: Arm Modeling
E: Arm operation

Communication mode toolbar

A: Transfer Data
B: Monitor Communication

Debug toolbar

A: Start a Task
B: Step In
C: Continue All Tasks
D: Halt
E: Step-stop
F: Cycle-stop
G: Program Reset
H: Reset All Tasks
I: Toggle Breakpoint

Log toolbar

A: Set/Clear Control Log Start Line
B: Set/Clear Control Log End Line
C: Set/Clear Trace Log Start Line
D: Set/Clear Trace Log End Line
E: Set/Clear Variable Log Start Line
F: Set/Clear Variable Log End Line
G: Single-trace Log

3.2.4 Docking view

The Docking view area provides tab interfaces for switching between members of windows that the user has "docked" (grouped together).

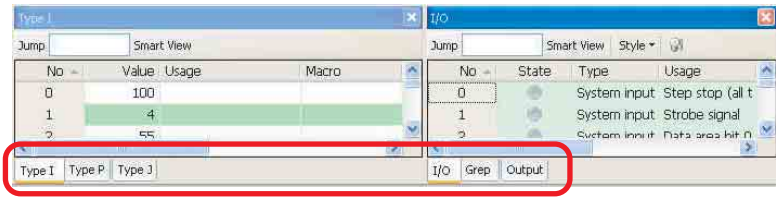

For further details on docking procedures, refer to 3.2.6 "Screen operations" (P. 41).

Docking is available for the following window types.

- 3.2.4.1 "Project view" (P. 32)
- 3.2.4.2 "Program list" (P. 33)
- 3.2.4.3 "Arm modeling" (P. 34)
- 3.2.4.4 "Arm operation" (P. 34)
- 3.2.4.5 "I/O window" (P. 35)
- 3.2.4.6 "Variables window" (P. 35)
- 3.2.4.7 "Tool/work/area setting window" (P. 35)
- 3.2.4.8 "Local variables window" (P. 35)
- 3.2.4.9 "Watch window" (P. 36)
- 3.2.4.10 "Output window" (P. 36)
- 3.2.4.11 "Search results window" (P. 36)
- 3.2.4.12 "Vision tool window" (P. 37)

3.2.4.1 Project view

This window lists folders and files in the project.

It has buttons for adding programs, importing files, and other operations.

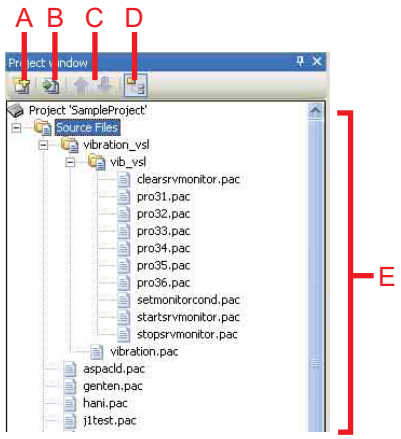

A: Create Programs...

This button is for creating program, header, and teach pendant (TP) panel files in the project.

B: Import

This button is for adding existing programs to the project.

C: button

These buttons are for moving files and folders up and down the file hierarchy.

: Move the selected item up one position.

: Move the selected item down one position.

D: Display files

This button opens a folder, displaying the files inside.

E: List hierarchy

This button lists all files and folders in the project hierarchy.

Double-clicking a program, header, or teach pendant (TP) panel file opens it.

3.2.4.2 Program list

This window lists the programs in the project.

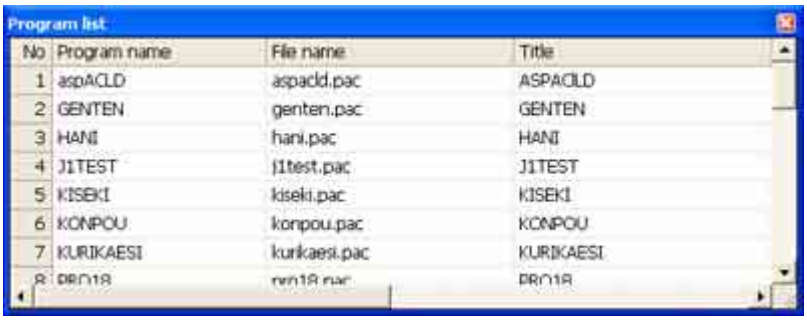

Icon

A key icon is shown for locked files.

Program name

This displays the program name declared in "PROGRAM".

File name

This displays the name of files with programs stored.

Title

This displays the program name declared in '!TITLE "xxxxx".

Usage

This displays the usage status of the program.

3.2.4.3 Arm modeling

This window is for arranging objects in the Arm 3D view window.

For further details on modeling in the Arm 3D view window and Arm modeling, please refer to Chapter 6 "Arm 3D View Window" (P. 90).

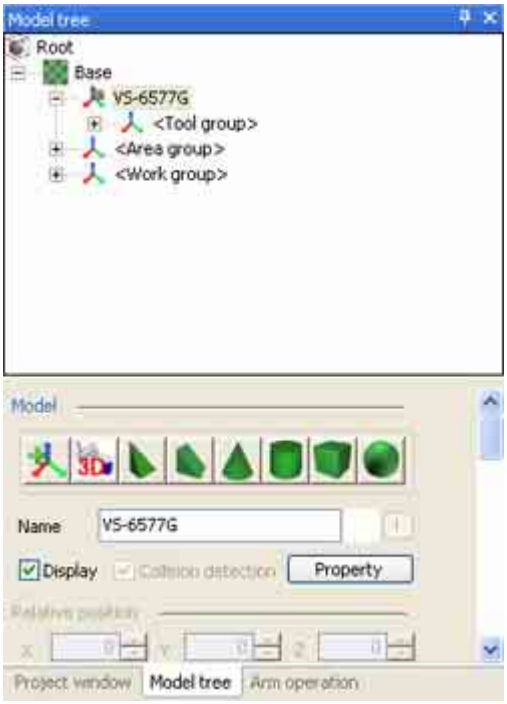

3.2.4.4 Arm operation

This window is for moving the simulated robot in the Arm view window.

For further details on operating the robot in the Arm view window, please refer to Chapter 6 "Arm 3D View Window" (P. 90).

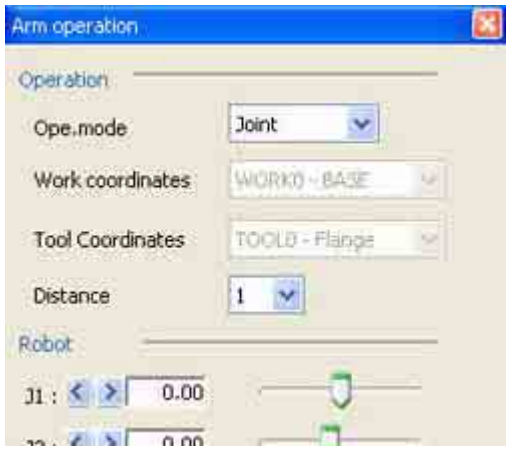

3.2.4.5 I/O window

This window type is for monitoring I/O and editing.

For further details on monitoring I/O, please refer to Chapter 7 "Online Functions" (P. 103).

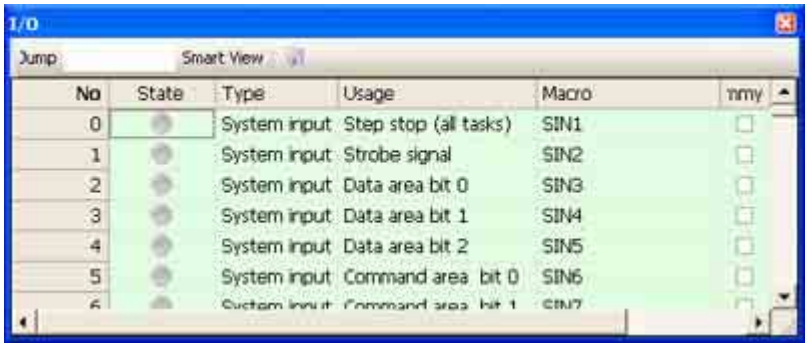

3.2.4.6 Variables window

This window type is for displaying global variables. Listing or editing is possible.

For further details on monitoring global variables, please refer to Chapter 7 "Online Functions" (P. 103).

Type P
Jump
Smart View
Get Position
Move
No
X
Y
Z
T
FIG
Usage
0 0 0 0 0 -1 - (Undef (Reserved)
1 0 0 0 0 -1 - (Undef Area 0 - interference ;
2 0 0 0 0 -1 - (Undef Area 1 - interference ;
3 0 0 0 0 -1 - (Undef Area 2 - interference ;
4 0 0 0 0 -1 - (Undef Area 3 - interference ;
5 0 0 0 0 -1 - (Undef Area 4 - interference ;
6 0 0 0 0 -1 - (Undef Area 5 - interference ;
7 0 0 0 0 -1 - (Undef Area 6 - interference ;

3.2.4.7 Tool/work/area setting window

This window type is for setting tool coordinates, work coordinates and area.

For further details on these coordinates, please refer to Chapter 6 "Arm 3D View Window" (P. 90).

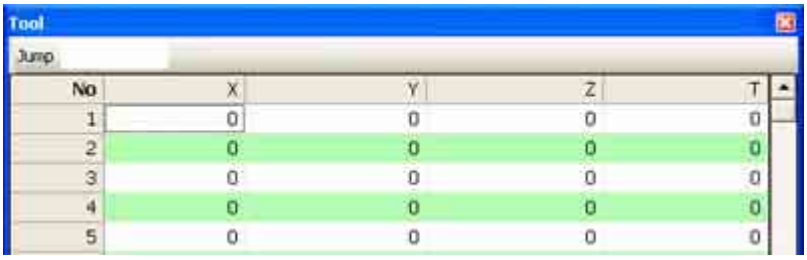

3.2.4.8 Local variables window

This window type is for monitoring the selected local variables.

For further details on monitoring local variables, please refer to Chapter 7 "Online Functions" (P. 103).

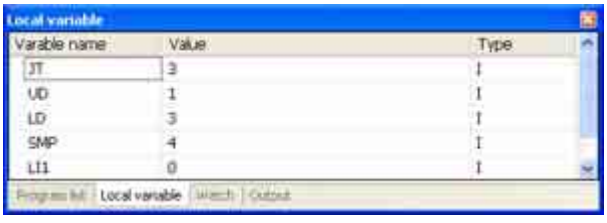

3.2.4.9 Watch window

This window type is for monitoring the values of variables on the watch list.

For further details on watch lists, please refer to Chapter 7 "Online Functions" (P. 103).

3.2.4.10 Output window

This window type displays progress and error messages from the syntax check and compiler.

For further details on such output, please refer to .5.8 "Making Executables" (P. 88)

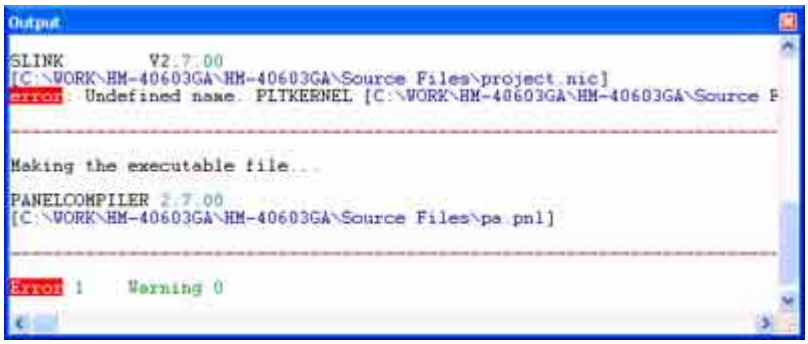

3.2.4.11 Search results window

This window type displays the results of a project-wide search.

For further details on this output, please refer to 5.4.1 "Finding and replacing strings" (P. 74).

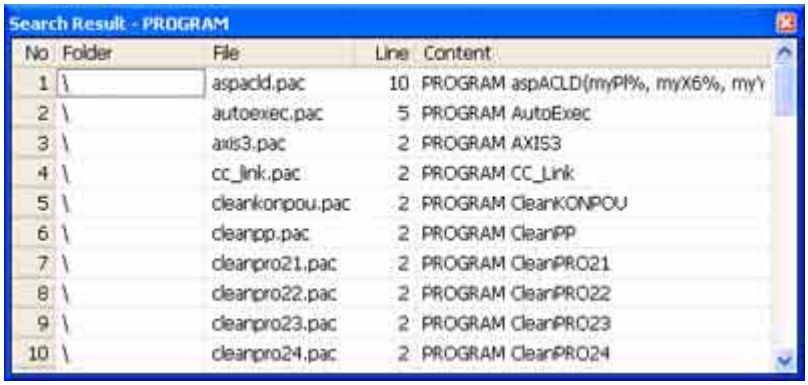
Search Result - PROGRAM
No
Folder
File
Line
Content
1 \ aspacld.pac 10 PROGRAM aspACLD(myPI%, myX6%, myY
2 \ autoexec.pac 5 PROGRAM AutoExec
3 \ axis3.pac 2 PROGRAM AXIS3
4 \ cc_link.pac 2 PROGRAM CC_Link
5 \ cleankonpou.pac 2 PROGRAM CleanKONPOU
6 \ cleanpp.pac 2 PROGRAM CleanPP
7 \ cleanpro21.pac 2 PROGRAM CleanPRO21
8 \ cleanpro22.pac 2 PROGRAM CleanPRO22
9 \ cleanpro23.pac 2 PROGRAM CleanPRO23
10 \ cleanpro24.pac 2 PROGRAM CleanPRO24

3.2.4.12 Vision tool window

This window type is for configuring visual functions.

For further details on this window, please refer to Chapter 9 "Vision Manager" (P. 138).

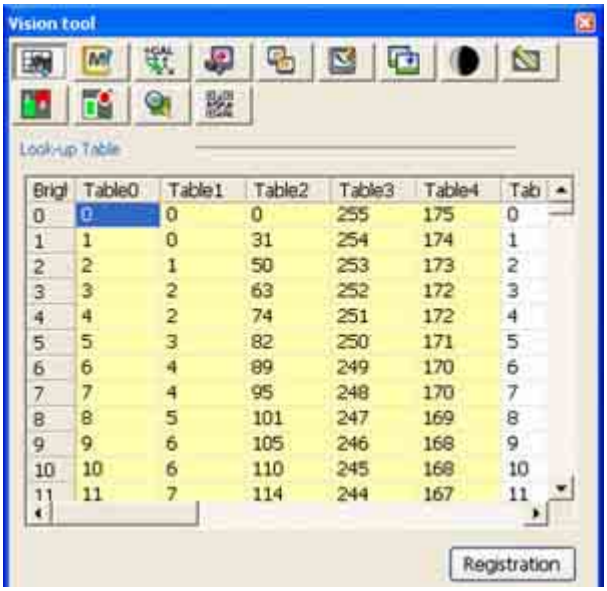

3.2.5 Program view

This displays the following window types: Arm 3D view, Vision monitor, and Program edit. If there is a robot controller on line, the list expands to include Task and Log windows.

This area provides a tab interface for switching windows.

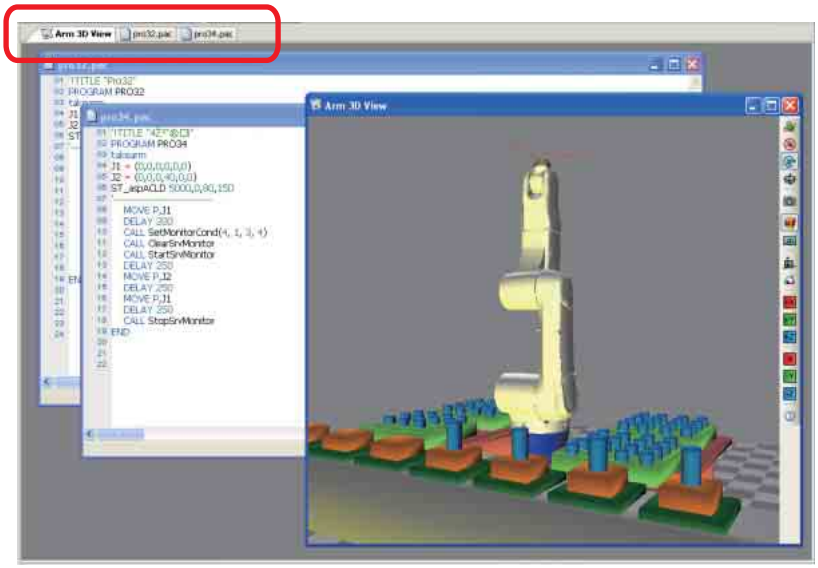

This area displays the following window types.

- 3.2.5.1 "Program edit window" (P. 38)
- 3.2.5.2 "Arm 3D View" (P. 39)
- 3.2.5.3 "Vision monitor window" (P. 39)
- 3.2.5.4 "Log window" (P. 40)

3.2.5.1 Program edit window

This window type is for editing program and header files.

Syntax highlighting displays numbers, operators, comments, and other elements in different colors.

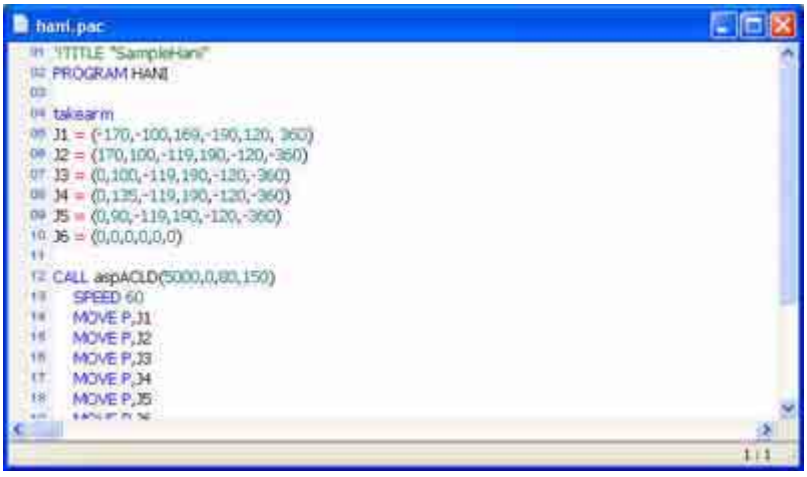

3.2.5.2 Arm 3D View

This 3D window is for checking robot operation.

Adding other equipment and devices allows for collision detection.

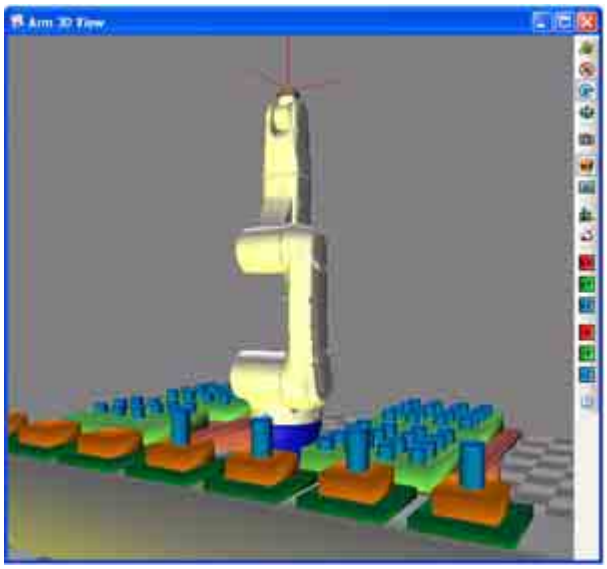

3.2.5.3 Vision monitor window

This window displays the image from a camera.

For further details on this window, please refer to Chapter 9 "Vision Manager" (P. 138).

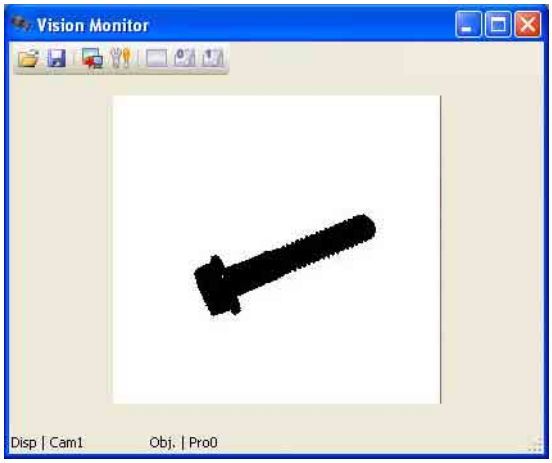

3.2.5.4 Log window

If there is a robot controller on line, this displays log data.

For further details on such logs, please refer to Chapter 8 "Logging" (P. 120).

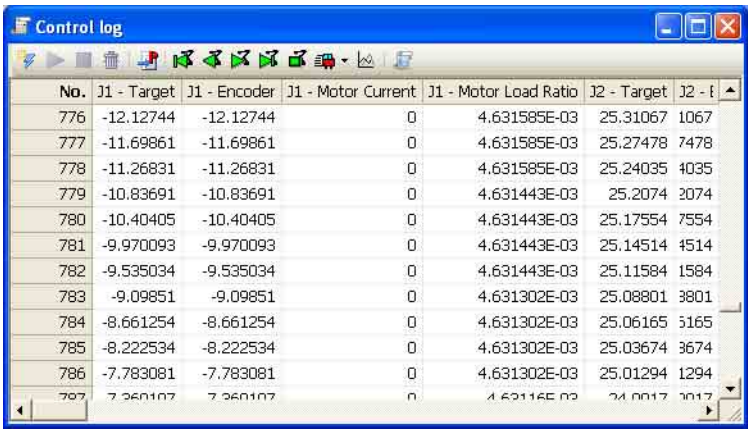

No.	J1 - Target	J1 - Encoder	J1 - Motor Current	J1 - Motor Load Ratio	J2 - Target	J2 - E
776	-12.12744	-12.12744	0	4.631585E-03	25.31067	1067
777	-11.69861	-11.69861	0	4.631585E-03	25.27478	7478
778	-11.26831	-11.26831	0	4.631585E-03	25.24035	4035
779	-10.83691	-10.83691	0	4.631443E-03	25.2074	2074
780	-10.40405	-10.40405	0	4.631443E-03	25.17554	7554
781	-9.970093	-9.970093	0	4.631443E-03	25.14514	4514
782	-9.535034	-9.535034	0	4.631443E-03	25.11584	1584
783	-9.09851	-9.09851	0	4.631302E-03	25.08801	3801
784	-8.661254	-8.661254	0	4.631302E-03	25.06165	5165
785	-8.222534	-8.222534	0	4.631302E-03	25.03674	3674
786	-7.783081	-7.783081	0	4.631302E-03	25.01294	1294

3.2.6 Screen operations

WINCAPS III allows flexible customization of menus, toolbars, and windows on the screen.

3.2.6.1 Moving toolbars

Toolbars can be dragged anywhere on the screen.

Inside the toolbar display area, they clump together to conserve space.

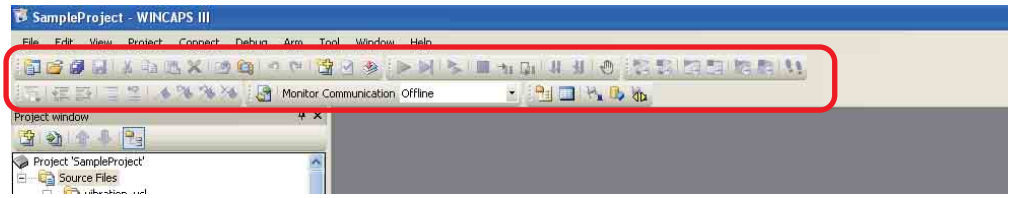

Dragging one outside this area, however, adds a title bar.

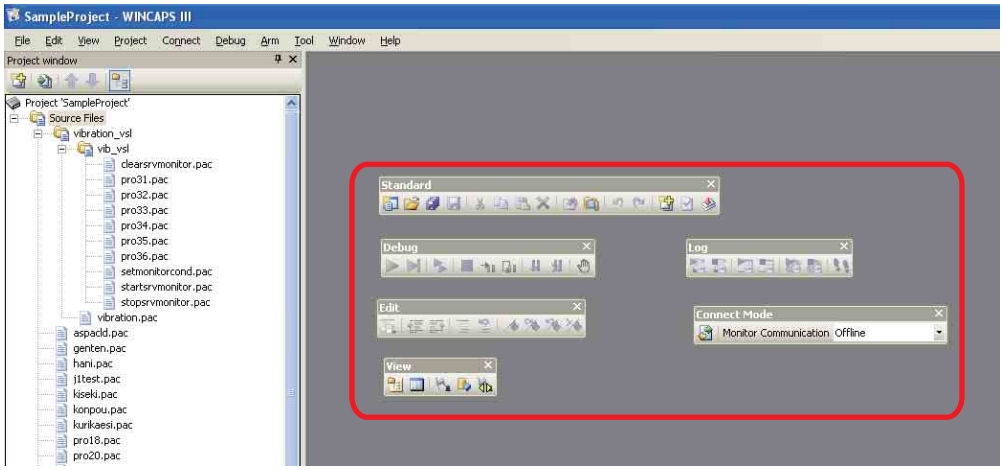

Procedure

To drag a toolbar, grab its end tab or title bar (shown in red below).

3.2.6.2 Changing window layout

WINCAPS III's flexible layout allows you to freely move its windows anywhere within its application window and to snap them vertically or horizontally to an edge within the application window or just the selected area.

The Docking view area provides tab interfaces for switching between members of windows that the user has "docked"—stacked together within their own display area.

(1) Grouping window for display

Docking adds a freestanding window to another window to form or expand a group.

Just grab the first window's title bar (shown in red) and drag the blue window outline to the second window's title bar. A tab then appears below the stacked windows to indicate successful docking.

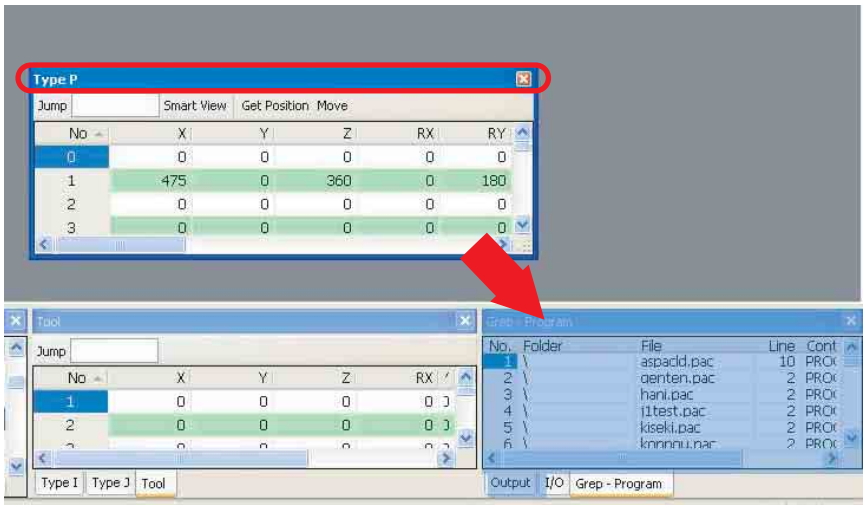

Note

The drag destination is the title bar. Dropping anywhere else produces normal window overlap.

(2) Snapping windows

This operation moves the selected window up against the specified edge.

The first step is grabbing the window's title bar to display the snap arrow icons. These offer two choices: snap within the application window or just within the current area.

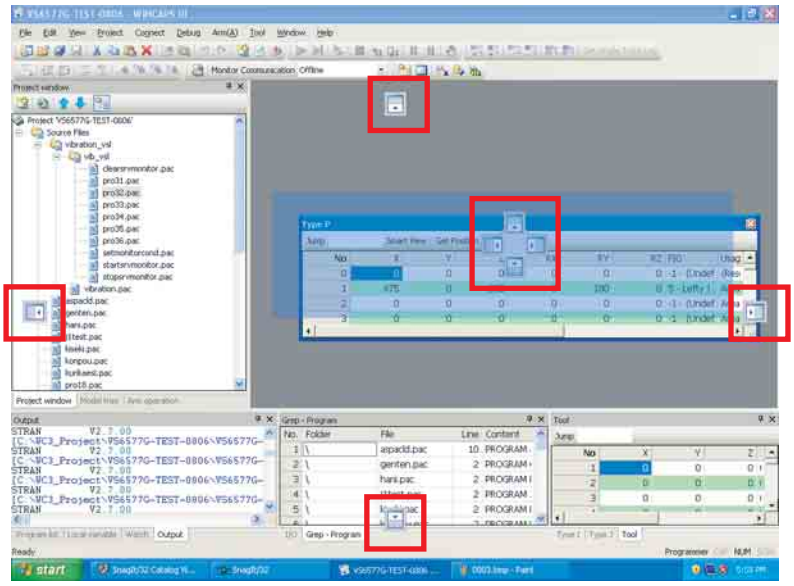

Snapping within application window

Your first choice is to move windows to an edge of the application window.

Operating procedure

1. **Start dragging the window's title bar to display the snap icons.**

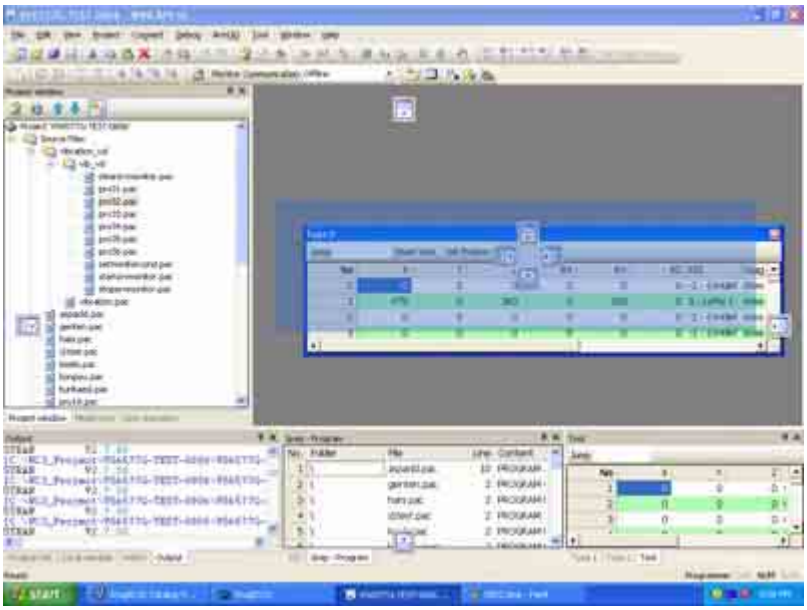

2. **Drop the blue window silhouette on an icon in the outer set to move the window against the corresponding edge of the application window.**

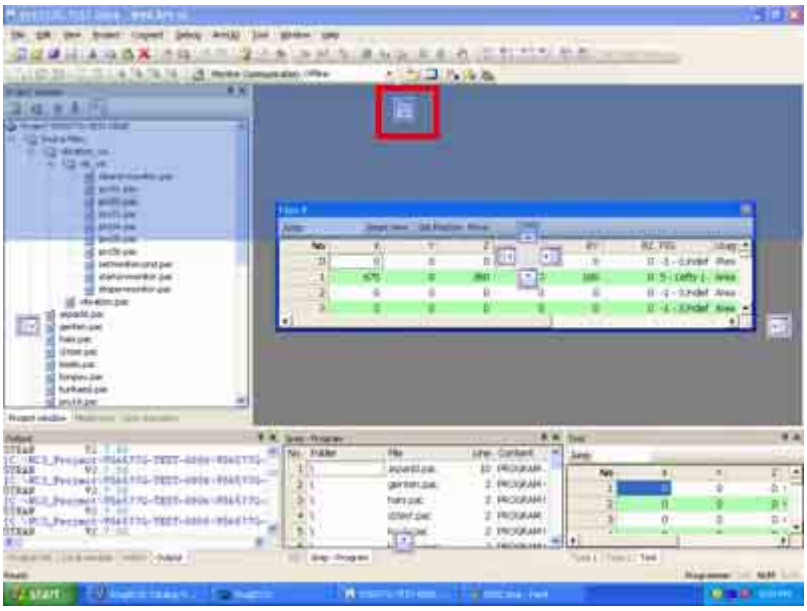

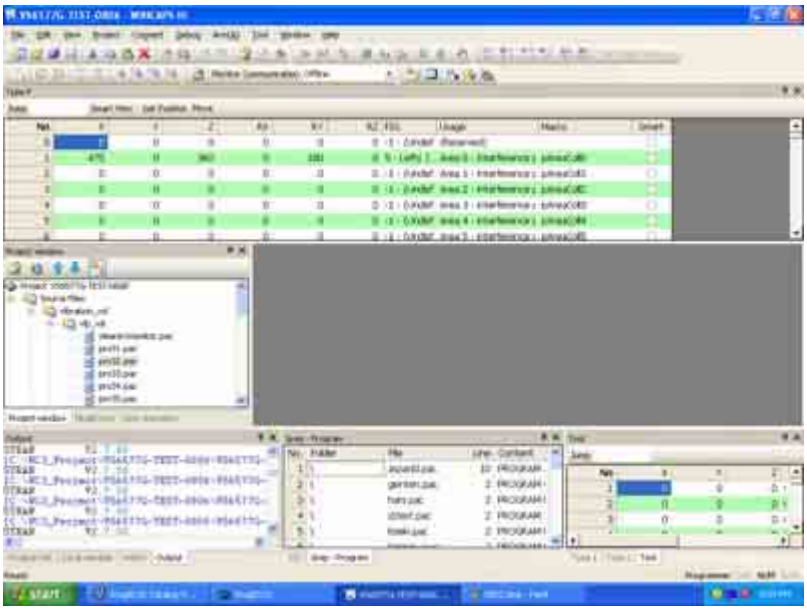

Snapping within current area

Alternatively, you can snap within the Program view, Docking view, or other area.

Operating procedure

1. Start dragging the window's title bar to display the snap icons.

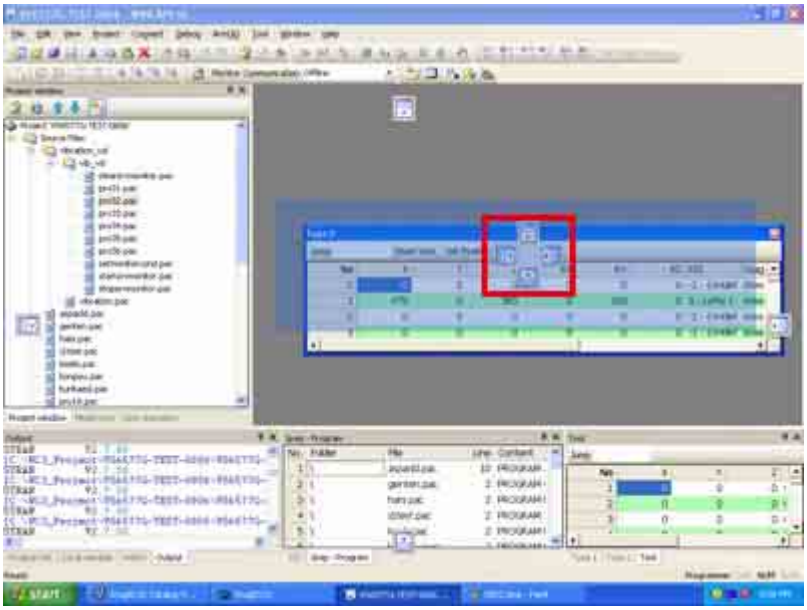

2. Drop the blue window silhouette on an icon in the inner set to move the window against the corresponding edge of the current area.

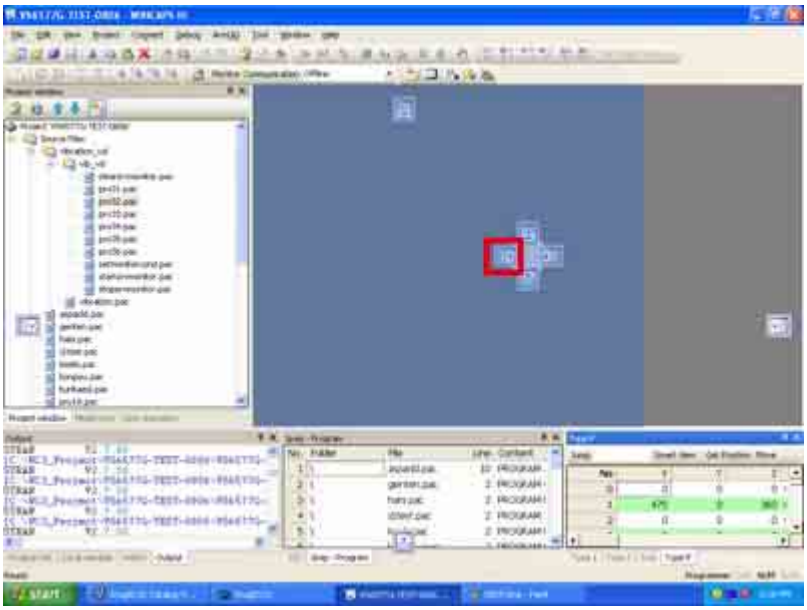

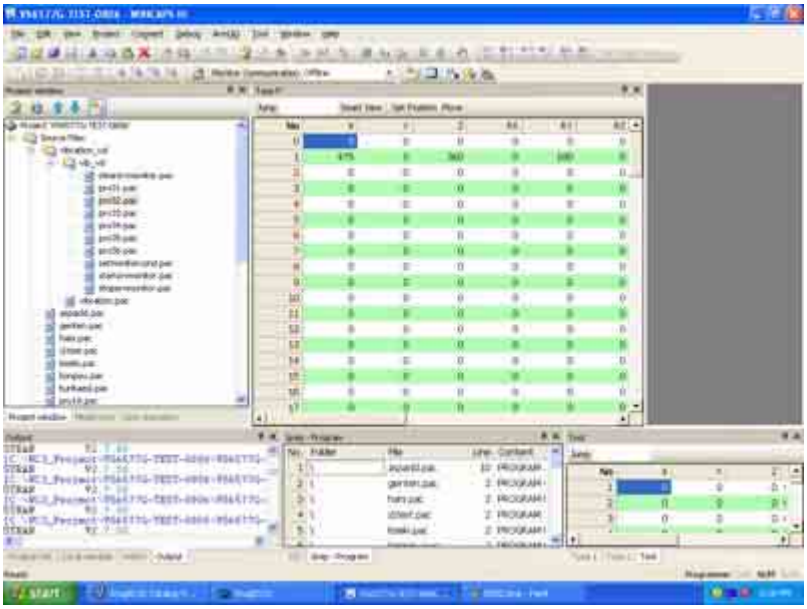

(3) Minimizing Docking view area

This operation minimizes the Docking view area to maximize the Program view area.

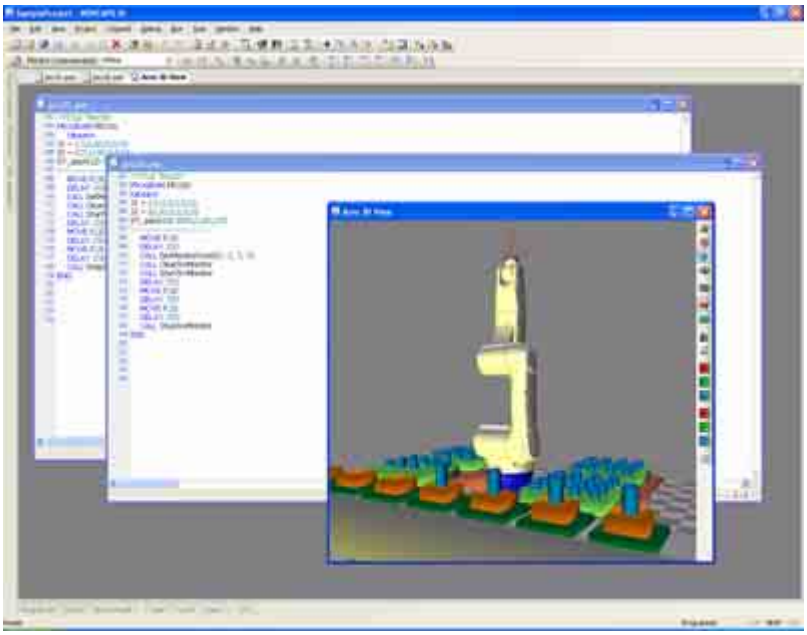

Operating procedure

1. Click the icon on the right end of the Docking view title bar.

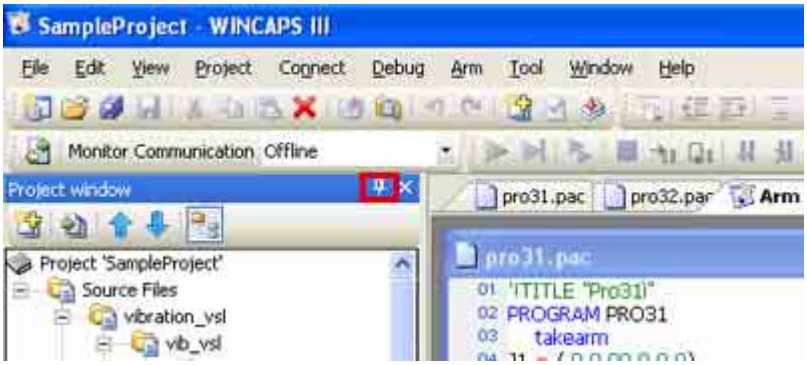

The operation minimizes the Docking view area, showing the tab instead as shown below.

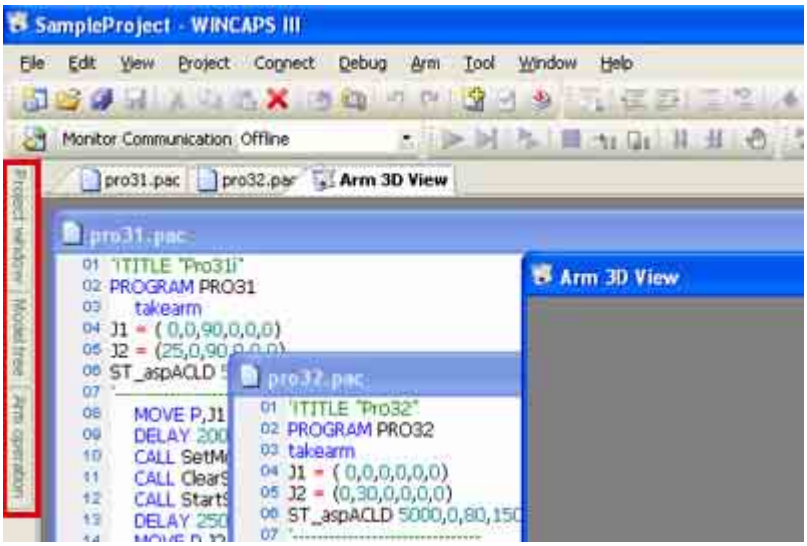

2. To temporarily display the minimized window in the Docking view area so that it overlaps the Program view area as shown below, click the tab shown in step 1.

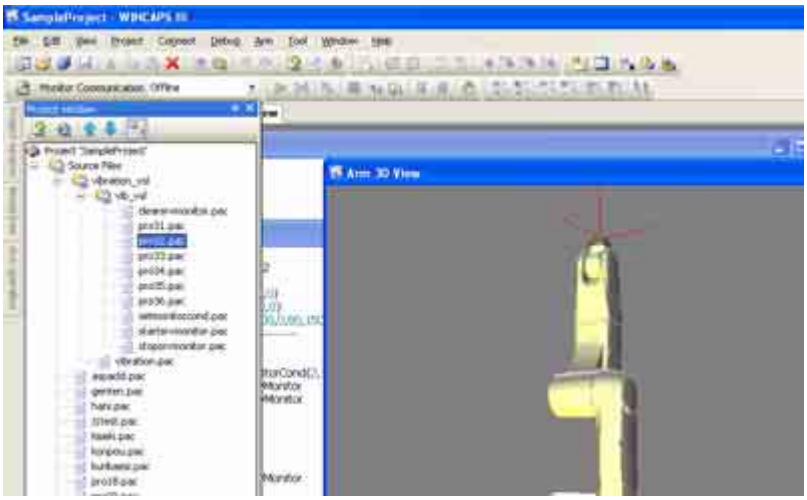

Note

- To minimize all windows in the Docking view area, select Window|Hide all.
- To restore a minimized window in the Docking view area to the original size, display the minimized window and click the icon on the right end of the title bar. To restore all minimized windows to the original size, select Window|Show all hidden windows from the Window menu.

3.3 Quitting WINCAPS III

Operating procedure

1. Choose File|Exit to quit the program.

Note

If a project is already being edited, the confirmation dialog appears.

WINCAPS III
Do you want to save the project?
All the edited data is lost when closing without saving the project.
Show extra information
Save
Don't Save
Cancel

The edited changes can be selected and saved by pressing Show extra information.

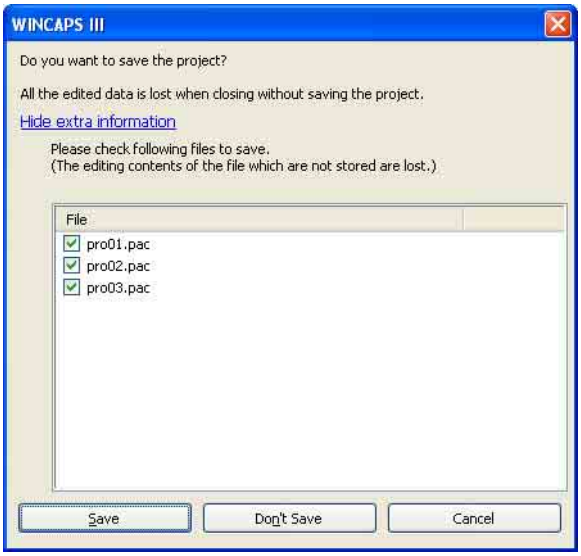

Save button

Overwrites the project.

Don't Save button

This button deletes the edited changes.

Cancel button

Cancels the quitting procedure and reverts to the previous WINCAPS III screen.

Chapter 4 Creating a Project

4.1 Overview

WINCAPS III manages the programs, parameters, variables, and other data for each robot as a separate project.

4.1.1 Folders

A project uses the following file hierarchy.

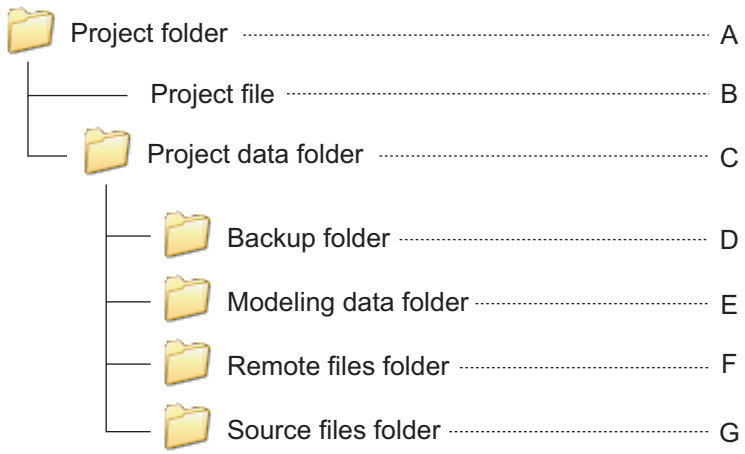

A: Project folder

This holds all files for the project.

Its name becomes the project name.

B: Project file

This file, with file extension .wpj. contains data on the project overall.

Double-clicking this file opens the corresponding project. (File extension: .wpj)

C: Project data folder

This folder holds the data for the project.

Its name becomes the project name.

D: Backup folder

This folder holds backup copies of robot controller related data including the power-on time. Receiving data from the connected robot controller automatically creates this folder.

E: Modeling data folder

This folder holds 3D modeling data for the project.

F: Remote files folder

If there is a robot controller on line, the software spools robot controller files here.

G: Source files folder

This folder holds the programs, header files, and teach pendant (TP) panels for the project.

The Project window displays its contents.

4.2 Creating a New Project

WINCAPS III provides a wizard for creating a new project.

New projects are created using the following two methods.

- Select robot type manually for creating a new project
  This method can be used when the robot is not linked. Used for creating projects in advance of robot installation (when designing equipment, etc.) Match the settings with the controller to link to. Errors will occur during linking if the settings do not match.
- Get information from the controller for creating a new project
  If the robot and the controller are set up, import one of projects held in the robot controller into WINCAPS III to create a new project.
  Using this method does not require newly configuring the robot type and other various settings, but requires that the robot controller and PC (WINCAPS III) be connected with each other for data exchange. When importing a project from the robot controller, it is possible to search for robots connected.

Operating procedure

1. Choose File|New project to load this wizard.

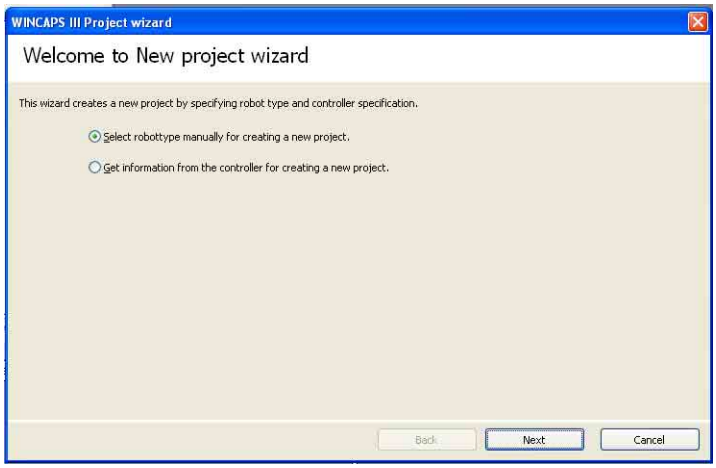
WINCAPS III Project wizard
Welcome to New project wizard
This wizard creates a new project by specifying robot type and controller specification.
Select robottype manually for creating a new project.
Get information from the controller for creating a new project.
Back
Next
Cancel

The Back button returns the wizard to the preceding screen.

The Next button advances the wizard to the next screen.

The Cancel button exits the wizard.

Note

Starting WINCAPS III Project wizard when the currently open project has unsaved modifications displays the following confirmation dialog, asking whether or not to save unsaved modifications before closing the project.

2. **Follow the wizard's instructions to configure the project.**

There are six items to specify in the case of manual robot type selection.

1) Project name and location
2) Robot type
3) Robot controller options
4) Link type
5) Variables
6) I/O port settings

In the case of project creation from controller information, make settings only for 1) Project name and location, and 4) Link type

Note

- The last four can be modified at any time, but not the first three:
  - Project name and location
  - Robot type
  - Robot controller options
- There is a basic setting that specifies where WINCAPS III saves new projects. For further details on these settings, please refer to 3.1.1 "WINCAPS III basic settings" (P. 14).
- Do not check the Customer specifications check box displayed by Robot controller options for standard robots. Use for robots with special specifications (with a "#" for the robot type).

3. **When a Complete button appears on the screen, press it to display the new project.**

4.3 Opening an Existing Project

Operating procedure

1. Choose File|Open project to display the Open dialog box.

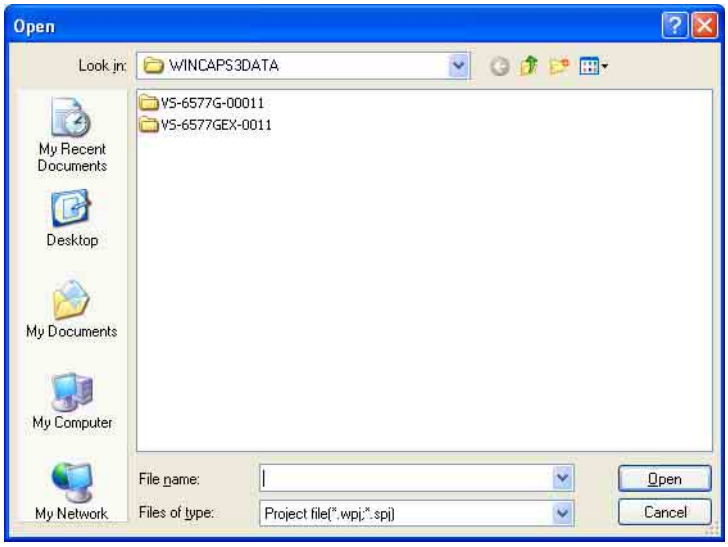

Note

- The following two types of files can be opened.
  WINCAPS III project data (File extension: .wpj)
  WINCAPS II project data (File extension: .spj)
- If an existing project is currently edited, the confirmation dialog appears, asking whether or not to save unsaved modifications.

4.4 Saving Project

The File menu offers two ways to save the current project.

- Save project
  This saves the currently open project.
- Save project as...
  This creates a folder under a specified name and copies all current project data into the folder.

Note

When executing Save project as..., specify a folder name other than the current project folder name and all folder names contained in the current project folder.

4.5 Configuring a Project

Operating procedure

1. **Choose Project|Properties to display the property sheets for the project.**
2. **Click the tab containing the desired configuration option for the settings.**
3. **When configuration is complete, press the OK button.**

   Pressing the Cancel button instead discards all changes.

Note

Moving to another tab does not save changes. To save your new settings, always press the OK button.

The dialog box has the following five tabs.

Robot info. tab

This displays project information.

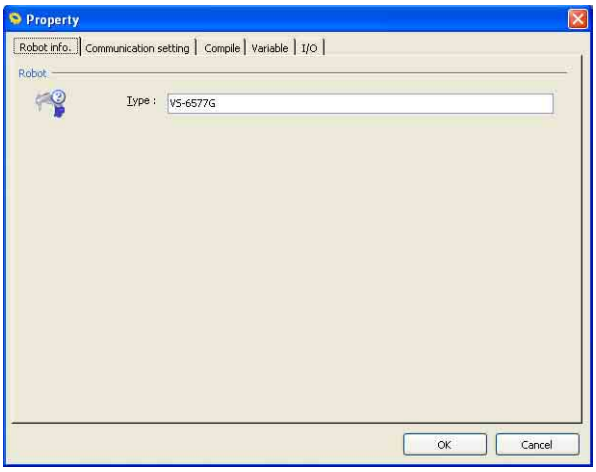

Type

Displays the robot type.

Communication setting tab

This specifies the communications link to the robot controller plus communications options.

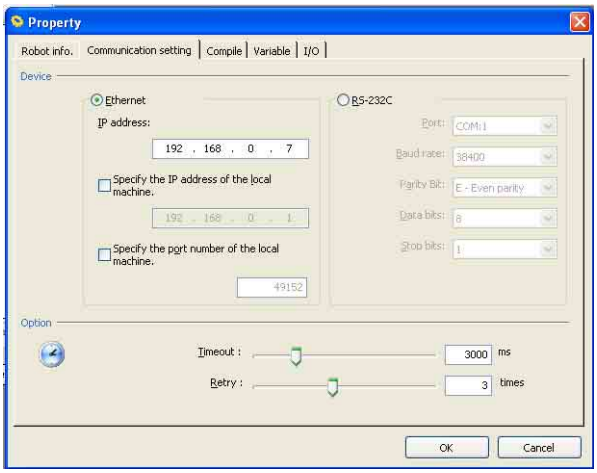

Ethernet

Enter the robot controller's IP address.

- IP address
  Enter the robot controller's IP address.
- Specify the IP address of the local machine.
  If your PC has several network cards, you can specify the one to use when linking. Specify the network card's IP address.
- Specify the port number of the local machine.
  Check the box and enter the port number if you wish to specify the PC's port number when linking.

RS-232C

Input the RS-232C communications settings in line with those of the robot controller.

Compile tab

Sets data regarding the executable program.

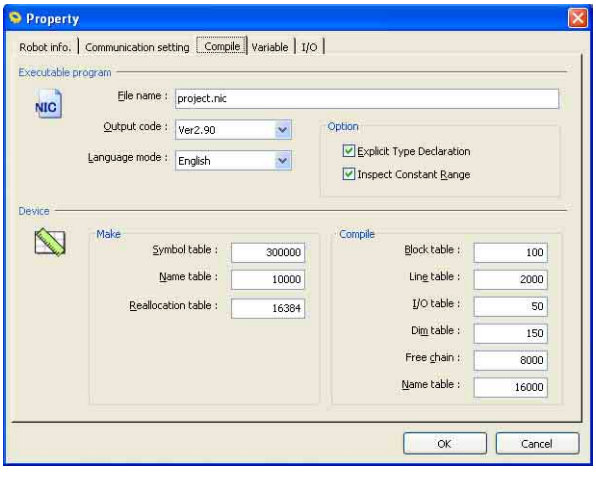

File name

Specifies a file name when renaming the execution file. By default, a program project file name having the extension "nic" is specified. If you do not wish to overwrite this file or wish to unify all the projects in an executable file name, change this value.

Output code

Sets the software version of the robot controller. Depending upon the version, the output codes of the execution program will differ. If the version specified here is different from the actual software version of the connected controller, an error will occur at the time of communication.

Language mode

Specifies the executable program language.

Explicit Type Declarations

Error will occur unless local variables are explicitly declared with a specification statement or postfix. If this option is found invalid, without explicit descriptions, it will be regarded as a single accuracy variable.

Inspect Constant Range

Checks the range of an argument with the statement described as constant when creating the execution program.

Symbol table

Sets the size of working range for storing information on symbols.

Name table

Sets the size of working range for registering information on names such as label name. This range is used to register information on all names handled by the program files included in the executable file.

Reallocation table

Sets the size of working range for determining the absolute addresses.

Block table

Sets the size of working range for storing the nested state of loops and conditional statement, etc.

Line table

Sets the size of working range for registering line information. The numerical value of this table is equal to the number of all the lines that can be compiled. The same value is equal to the nest level allowed for compiling.

I/O table

Sets the size of working range for registering information on IO variables. The numerical value of this table is equal to the number of defined IO variables.

Dim table

Sets the size of working range for registering information on array variables. The numerical value of this table is equal to the number of array variables that can be defined.

Free chain

Sets the size of working range for registering information address link. This is the range used for solving label addresses, jumping address of branch and loop commands, and global variables.

Name table

Sets the size of working range for registering information concerning label and other names. This is the range used for registering information on reserved words and user-defined labels, etc.

Variable tab

This specifies the number of variables used.

Set it to match the number of project variables used by the robot controller.

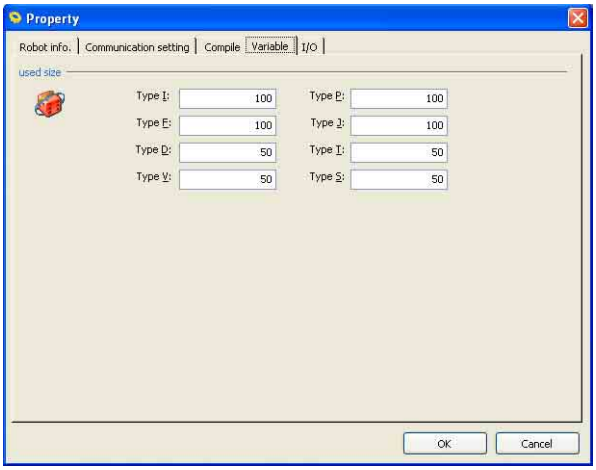

I/O tab

This specifies I/O assignments and I/O options.

For further details on I/O specifications / settings for each device, refer to the Option Equipment Manual.

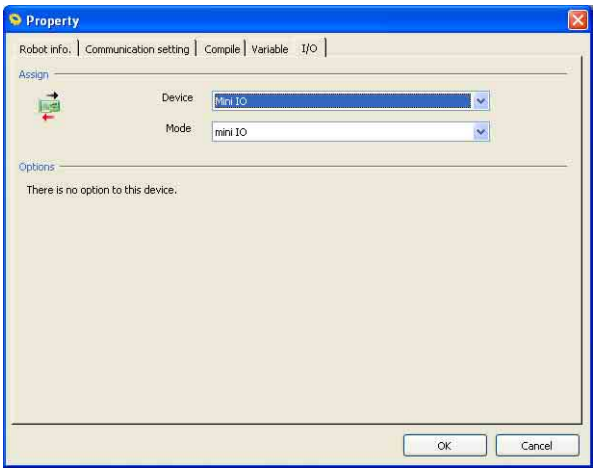

4.6 Configuring Parameters

Operating procedure

1. Choose Project|Parameters to display the parameter configuration sheets.

2. Click the tab containing the desired configuration option.

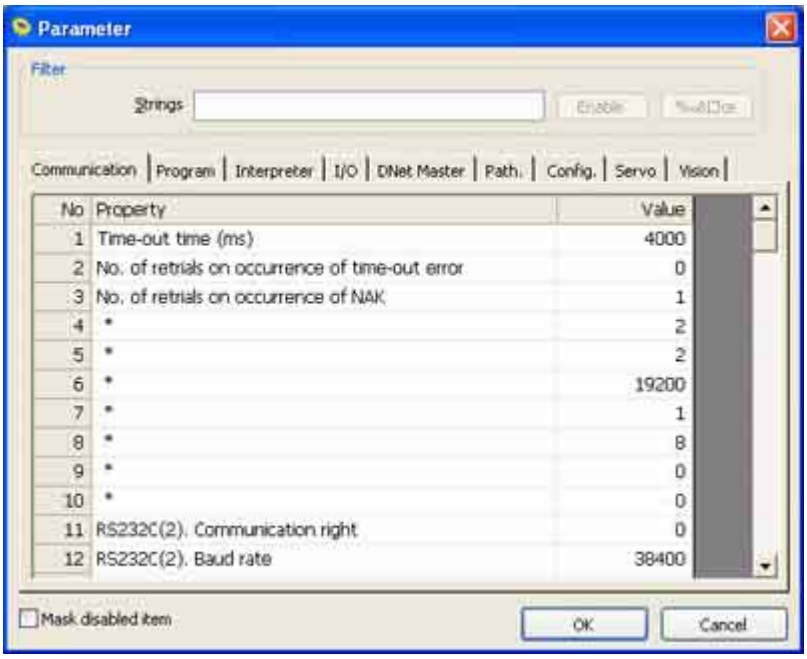

The dialog box has the following nine tabs.

- Communication tab
- Program tab
- Interpreter tab
- I/O tab
- DNet Master tab
- Path. tab
- Config. tab
- Servo tab
- Vision tab

Note

- Enabling the filter lists only parameters containing the specified string.
- Selecting the Mask unmodifiable items check box lists only those settings available for editing.

3. When configuration is complete, press the OK button.

Pressing the Cancel button instead discards all changes.

Note

Moving to another tab does not save changes. To save your new settings, always press the OK button.

4.7 Link with Robot Controller

WINCAPS III supports two types of links for communicating with a robot controller:

- Ethernet connection
- Serial (RS-232C) connection

For further details, please refer to 1.5 "Connecting to Robot Controller" (P. 8) and the robot controller documentation.

4.7.1 Communications settings

After connecting the link, configure it at the WINCAPS III end.

For further details on configuring the robot controller, please refer to its Setting Guide.

Operating procedure

1. Choose Connect|Settings to open the Property dialog box to the Communications settings tab.

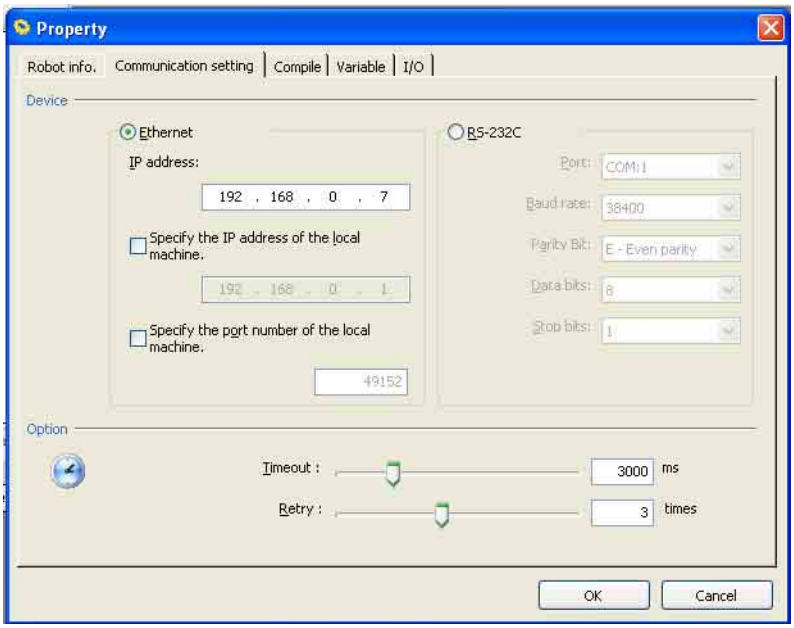

2. Configure the link.

First specify the connection between the computer and the robot controller.

Ethernet connection

All that is needed is the robot controller's IP address.

For further details on determining this, please refer to the robot controller documentation.

Serial (RS-232C) connection

This link requires the following settings.

- Communications port
- Baud rate
- Parity bits
- Data length
- Stop bits

3. Configure the options:

timeout and number of retries.

4. Press the OK button to save the new settings.

4.7.2 Data transfers

This link is for exchanging data with the robot controller.

The following data is exchanged.

Program

Data concerning programs. There are two types of data for programs.

Source file

Uncompiled program data

Executable file / map file

Compiled program data

Variable

Data for all variable values.

Tool/Work/Area

Data on tools, work, areas.

Log

All log data. (receivable only)

Set log data in flash fields and so on using Log acquisition settings.

Parameter

All parameter data.

Includes parameters in the Parameter editing screen.

There are five types of data for parameters as follow.

Arm parameters

Parameter on movement of the robot.

- Path tab
- Config. tab
- Servo tab

I/O parameters

Parameters concerning I/O.

- I/O tab
- DNet master tab

Program parameters

Parameters concerning programs.

- Program tab
- Interpreter tab

Communication

Communications settings parameters (receivable only)

- Communication tab

Vision

Parameters concerning visual functions.

- Vision tab

Vision

All visual tools data.

Select Screen data settings on the Transfer data screen.

Configuration

All configuration data (calset values, etc.)

Note

Some items will not appear in the list of transferable data due to WINCAPS III settings or robot controller specifications.

Operating procedure

1. Choose Connect|Transfer data... to display the bidirectional transfer dialog box.

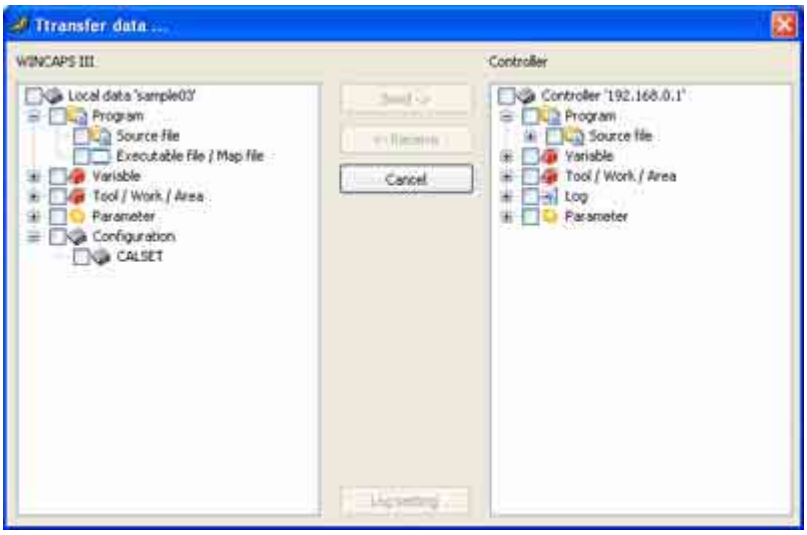

2. Select the data source(s).

Selecting the WINCAPS III check box sends data to the Controller; selecting the Controller one receives.

Note

Selecting multiple sources is perfectly acceptable.

3. **Press the Send or Receive button to display a confirmation dialog box.**

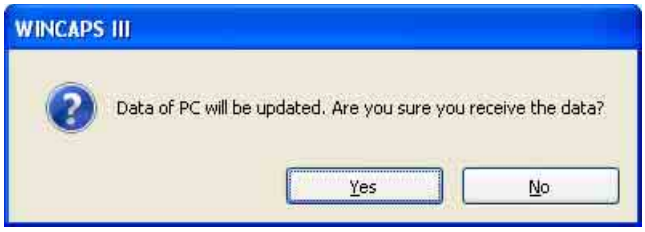

4. **Press the Yes button to start transferring data and display a progress screen.**

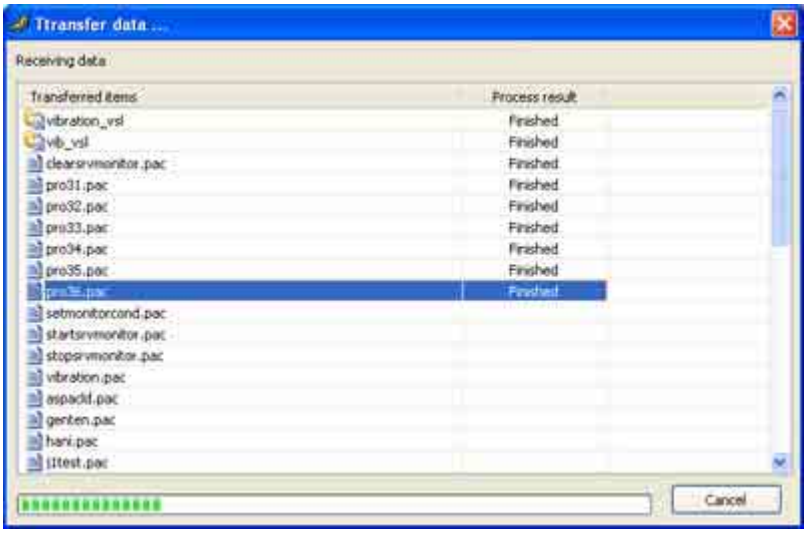

Note

Receiving data from the robot controller updates the WINCAPS III project data, nullifying any program updates in the interim.

⚠Caution

When transferring data to the robot controller, close the Program List window or the Select Variable Type window (if opened) on the teach pendant beforehand; otherwise, the controller cannot load map files or executable files transferred from WINCAPS III.

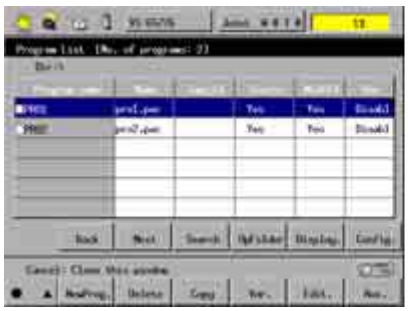

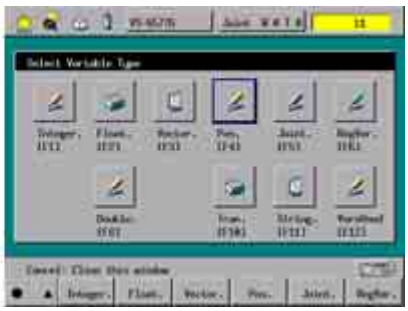

4.7.3 Arm parameter data transfer

The arm parameters contain a CALSET value deciding the robot's particular position data. CALSET values are included when transferring arm parameters from the robot controller to WINCAPS III, but not vice versa in order to prevent overwriting.

If you wish to transfer arm parameter data including CALSET values to the robot controller, refer to the Robot Installation Protection Guide.

Arm parameters received from the controller can be written to a separate file or loaded as arm data.

Operating procedure

1. **Log in at programmer level.**
2. **Choose Tool|Arm parameters to open the Arm parameter dialog box.**

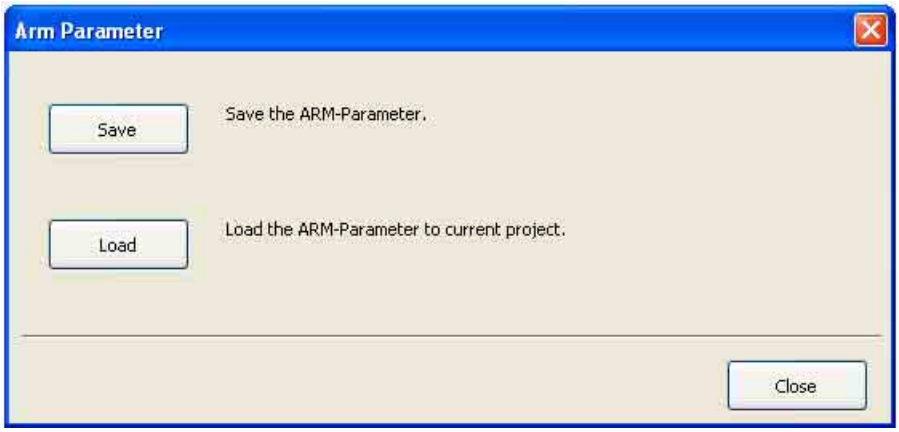

Save button

Writes WINCAPS III project arm parameters to a file.

Load button

Arm data from files below on your PC is uploaded to your current project.

- WAM: WINCAPS III arm data format
- WPJ: Loads only arm data from WINCAPS III projects.
- ARM: WINCAPS II arm data format

4.8 USB Tool

Instead of direct data transfer between a computer running WINCAPS III and the robot controller, a USB memory is available as a media for data exchange between them.

4.8.1 Reading data from USB memory

Follow the FDTool wizard to read data from a USB memory.

Operating procedure

1. Select Tool|USB|Read to start the FDTool wizard.

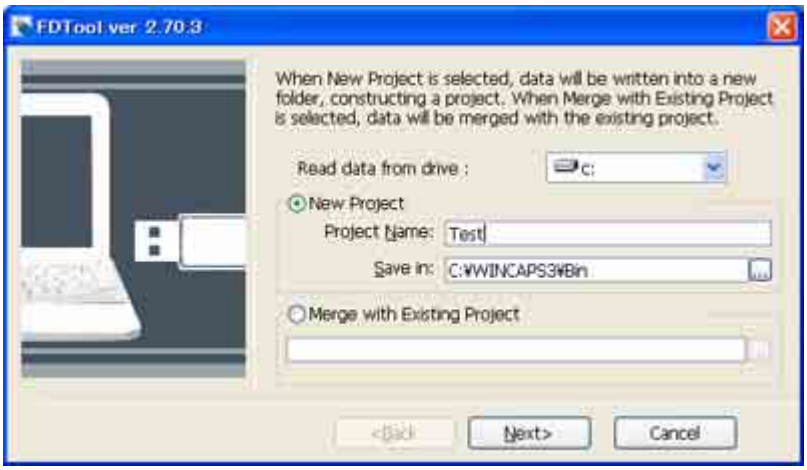
FDTool ver 2.70.3
When New Project is selected, data will be written into a new folder, constructing a project. When Merge with Existing Project is selected, data will be merged with the existing project.
Read data from drive :
c:
New Project
Project Name:
Test
Save in:
C:¥WINCAPS3¥Bin
Merge with Existing Project
<Back
Next>
Cancel

Read data from drive

This field specifies a drive for reading a USB memory.

New Project

This radio button is for creating a new project and reading data from a USB memory into the project. Enter a project name and select a location for saving the project.

Merge with Existing Project

This radio button is for selecting an existing project and reading data from a USB memory into the project. The data read from a USB memory merges with data in the existing project.

2. **Click the Next button.**

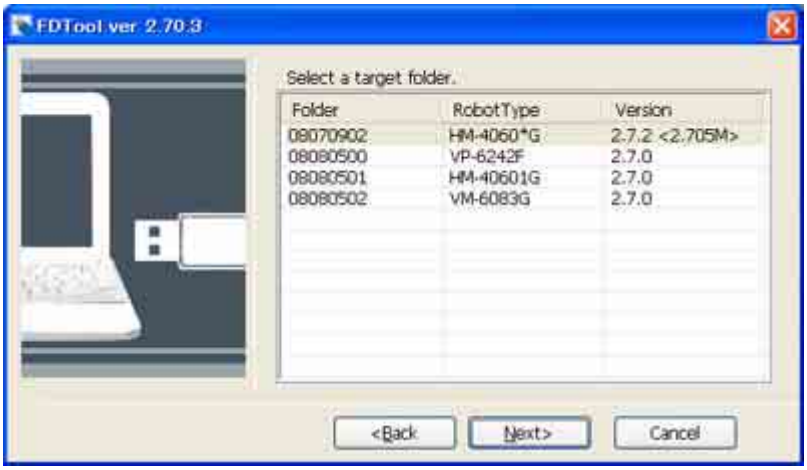

Select a target folder

This area specifies folders in the USB memory to read data from them.

3. **Click the Next button.**

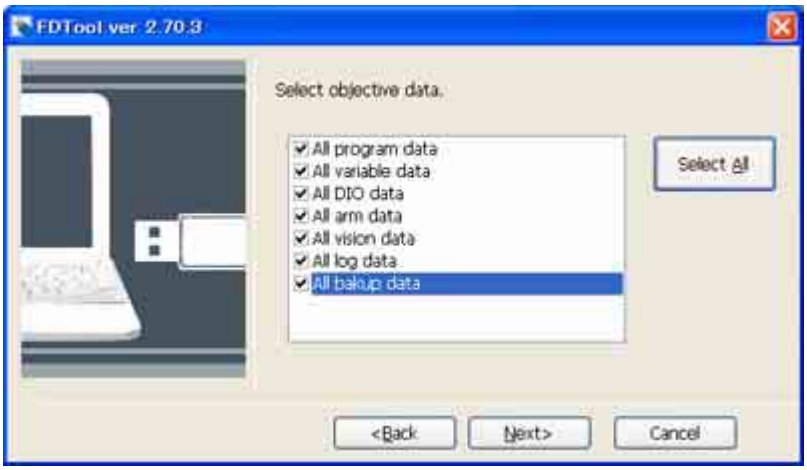

Select target data

Selecting these check boxes specify data to read from the USB memory. To read all data, click the Select All button.

4. Click the Next button to read the specified data from the USB memory.

Upon completion of reading, the following dialog appears.

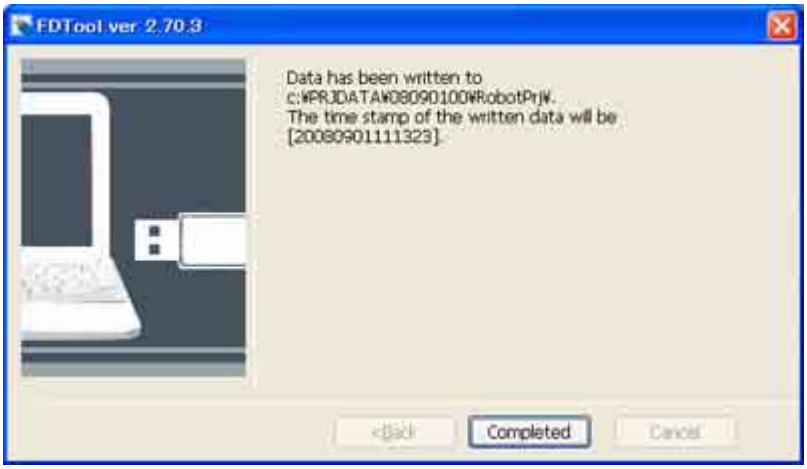

4.8.2 Writing data into USB memory

Follow the FDTool wizard to write data into a USB memory.

Operating procedure

1. **Select Tool|USB|Write to start the FDTool wizard.**

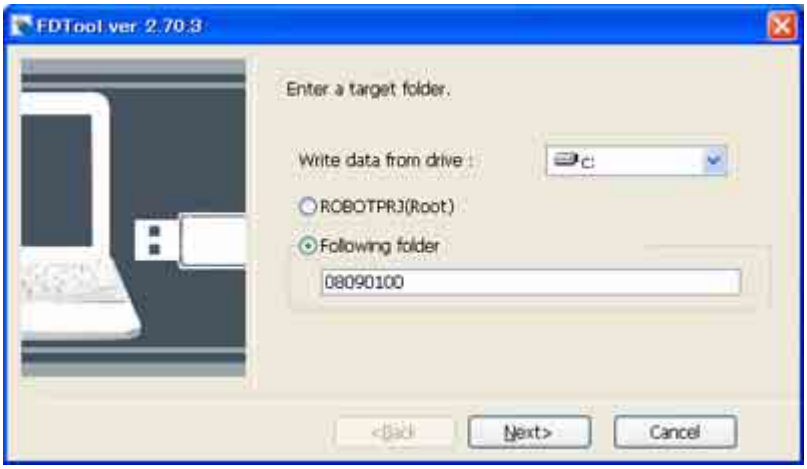

Write data into drive

This field specifies a drive for writing into a USB memory.

ROBOTPRJ (Root)

This radio button is for writing the entire project file into a USB memory.

Following folder

This radio button is for specifying a folder in the project and writing data held in the folder into a USB memory.

Note

When writing data into a USB memory, first open a target project and then start the FDTool wizard. The wizard cannot select an unopened project.

2. Click the Next button.

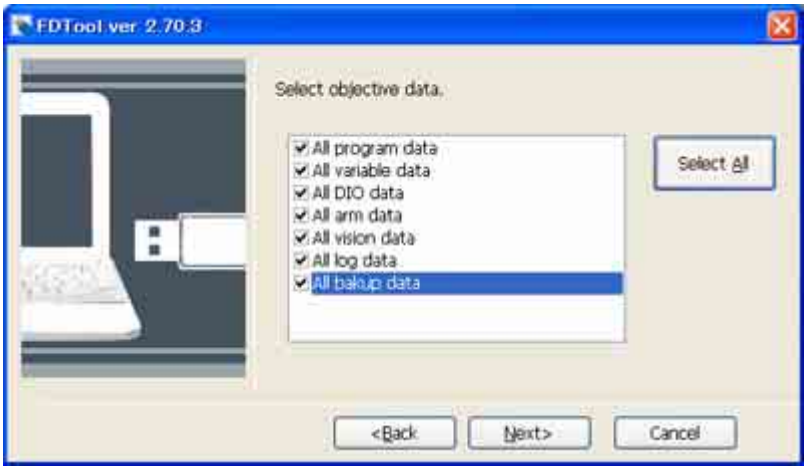

Select target data

Selecting these check boxes specify data to write into the USB memory. To write all data, click the Select All button.

3. Click the Next button to write the specified data into the USB memory.

Upon completion of writing, the following dialog appears.

4.9 Print

Project data of various types can be printed out.

Operating procedure

1. **Choose File|Print to display the Print dialog box.**

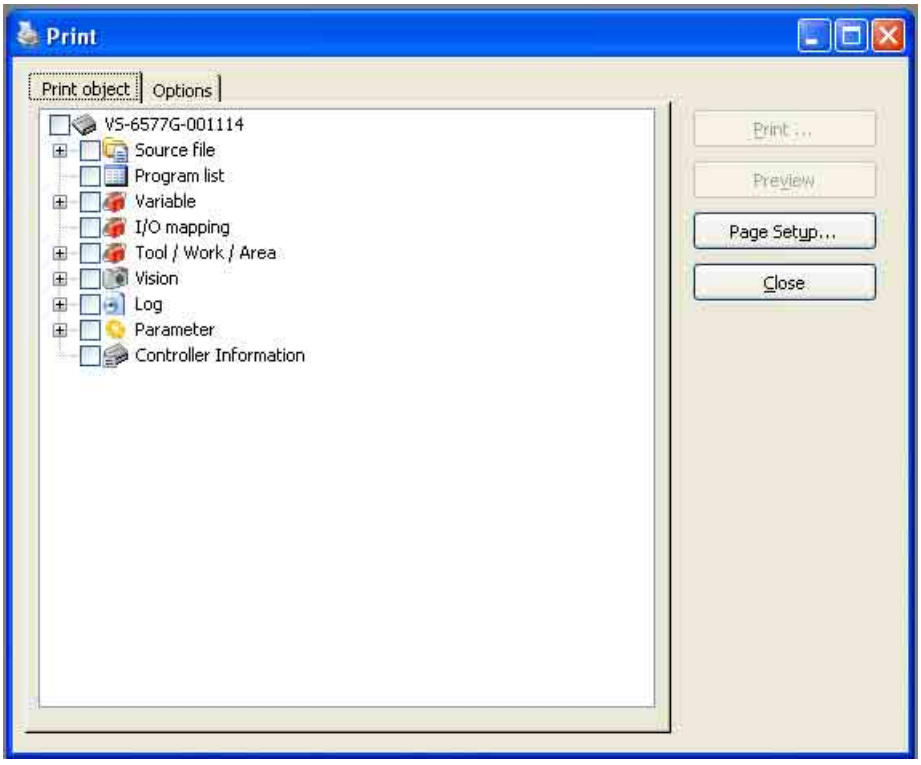

2. **Select the data you wish to print and press the Preview button.**

Check the preview and then make your print out.

Note

Printing out log data can result in vast amounts of printout pages, hence be sure to check the number of pages using the preview function first before printing.

Chapter 5 Writing Programs

5.1 Creating a New Program

Operating procedure

1. Choose Project|Add Program... to display the dialog box for creating a new program, header file, or teach pendant (TP) panel.

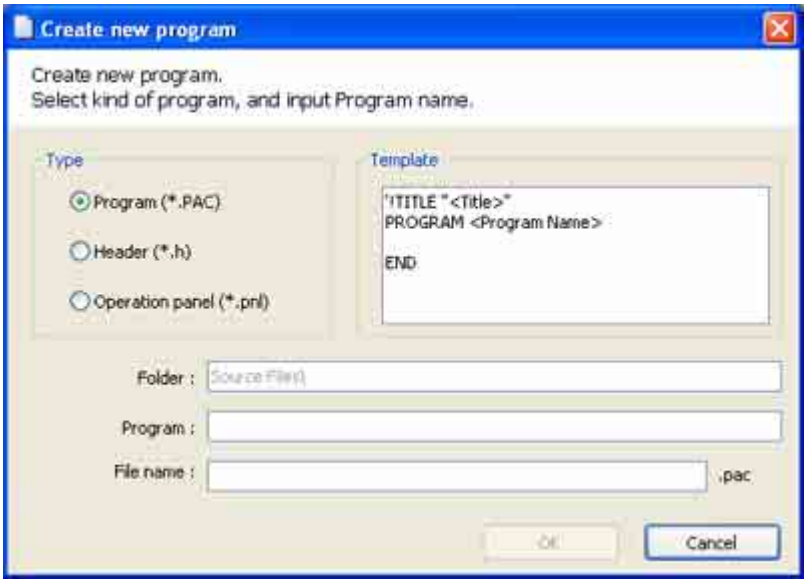

2. Specify the type.

There are three choices.

- Program (*.pac)
- Header (*.h)
- Panel designer (*.pnl)

The box to the right automatically displays the corresponding template.

3. Specify a name (title) for the program.

The default is to use this program name as the file name.

To use a different file name, enter it in the File name field.

4. Press the OK button to open a new file based on the template in the corresponding window: a Program edit window in the Program view area for a program or header file or the Panel Designer window for a TP panel.

Panel Designer procedures appear in the Panel Designer User's Manual separately issued.

Note

- The folder for the new file is the default (shown in gray) currently selected in the Project window. If the target folder already contains a file with the name specified, pressing the OK button displays an error message and returns to the dialog box.
- The limit is one TP panel per folder.

5.2 Leveraging Existing Files

In practice, a key technique is to recycle files from other projects.

There are three file types.

- Program file (*.pac)
- Header file (*.h)
- Teach pendant panel (*.pnl)

Operating procedure

1. Choose Project|Import... to display an Open dialog box.

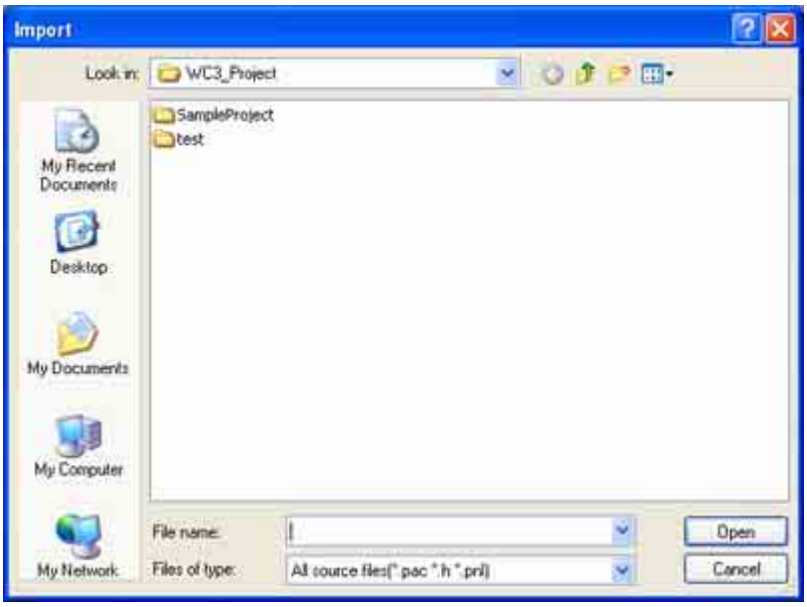

2. Select the file to add and press the Open button to add it to the Project and Program list windows.

Note

- The folder for the file is the one currently selected in the Project window. If that folder already contains a file with that name, however, a dialog box asks permission to overwrite it.
- If you wish to import by folders, choose Project|Folder|Import and specify the folder.

5.3 Saving a Program

The following procedure saves edits to the current program.

The File menu offers two ways to save modifications to the file in the selected Program edit window.

- Save updates the original file.
- Save As... saves them under a different name.

Only the latter warrants detailed description.

Operating procedure

1. Choose File|Save As... to display a Save As dialog box.

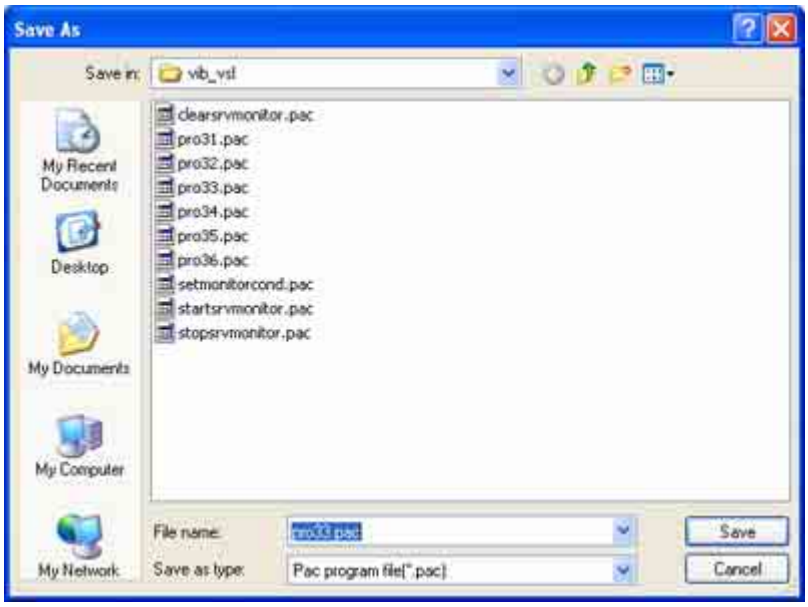

2. Specify the target folder and file name and press the Save button to save the contents of the Program edit window there.

If that folder already contains a file with that name, however, a dialog box asks permission to overwrite it.

Note

- If there are multiple programs in the Program view area, the file saved is the active one, the one in the currently selected Program edit window.
  The File menu emphasizes this by adding the file name to the two menu items.



- If that folder already contains a file with that name, however, a dialog box asks permission to overwrite it.

5.4 Editing a Program

Double-clicking a program or header file in the Project or Program list window opens it for editing in a Program edit window.

Note

- If the Project window does not show file names, press its Display files button.
- The Program view area provides a tab interface for switching between files.

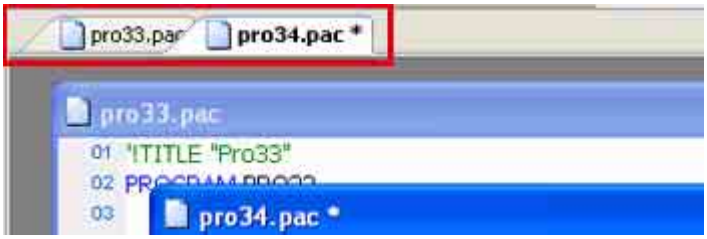

Alternatively, tiled and other layouts display multiple files for direct selection.

WINCAPS III provides the following program editing functions.

Configurable Program edit windows

The Program edit window text editor gives the user control over the font, size, and colors for displaying text. Syntax highlighting assigns different colors to distinguish between, for example, operators and comments. For further details on Program edit window display options, refer to 3.1.1 "WINCAPS III basic settings" (P. 14).

Finding and replacing strings

Find and replace strings in headers and programs.

Search ranges and regular expressions can be used.

Other functions

- Jump to...
  This is for moving the cursor to a line, specified by number, in the Program edit window.
- Comment out
  This submenu command changes the lines selected in the Program edit window into comments.
- Indent
  This submenu command indents the lines selected in the Program edit window.
- Bookmark
  This submenu is for working with bookmarks, markers on lines in Program edit windows. These markers make it easier to return to that position.
- Helper functions
  These are to help command input by listing candidates and showing command syntax.

5.4.1 Finding and replacing strings

You can specify the range and method to search and replace the character string.

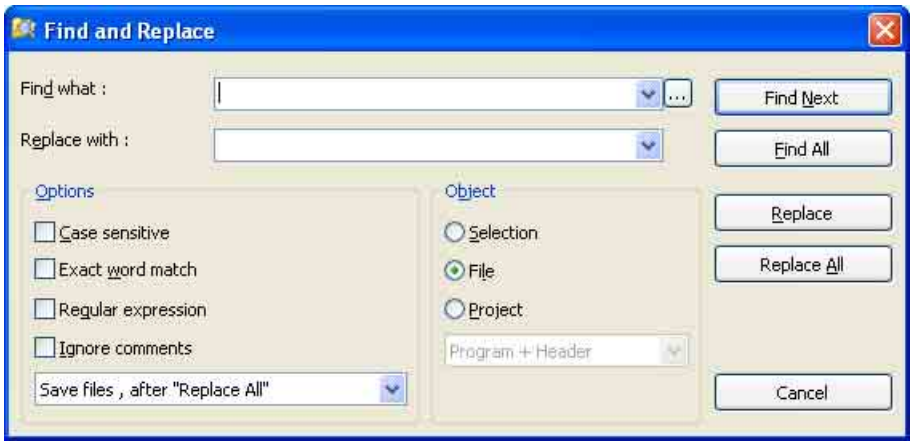

Target items

This field specifies the range of the target to be searched/replaced.

Choose Project to specify the file type.

Option

You can specify various search methods.

You can also select the files when executing Replace all.

Note

Double-clicking a line in the Search results window displays the corresponding program line.

5.4.2 Other editing functions

5.4.2.1 Jump to...

This is for moving the cursor to a line, specified by number, in the Program edit window.

Operating procedure

1. **Choose Edit|Jump to... to display the eponymous dialog box.**

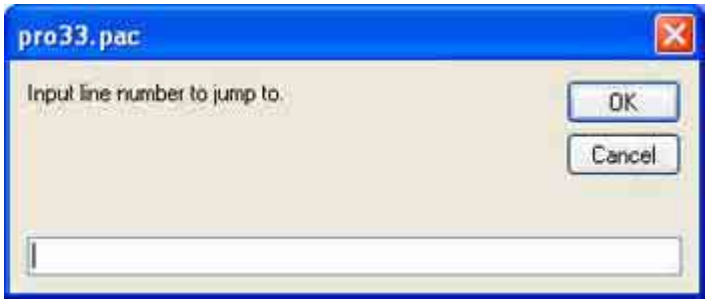

2. **Enter the line number.**
3. **Press the OK button to move the cursor to that line.**

5.4.2.2 Comment out

This submenu command changes the lines selected in the Program edit window into comments.

Operating procedure

1. **Select the lines to comment out.**
2. **Choose Edit|Comment Block|Comment to convert them to comments.**

Note

To reverse this operation, select lines and choose Edit|Comment Block|Decomment.

5.4.2.3 Indent

This submenu command indents the lines selected in the Program edit window into comments.

Operating procedure

1. **Select the lines to indent.**
2. **Choose Edit|Indent|Indent to indent them.**

Note

To reverse this operation, select lines and choose Edit|Indent|Unindent.

5.4.2.4 Bookmark

This submenu command is for setting a bookmark on the line under the cursor, or moving the cursor to a bookmark.

(1) Setting a bookmark

The following is the procedure for setting a bookmark on the line under the cursor.

Operating procedure

1. **Move the cursor to the line on which to set the bookmark.**
2. **Choose Edit|Toggle Bookmark to set the bookmark or, if there is already a bookmark there, delete it.**

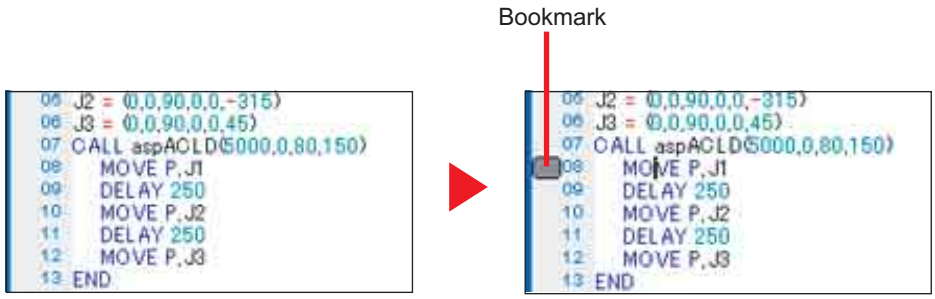

(2) Moving to a bookmark

There are submenu commands for moving the cursor to a line with a bookmark.

Operating procedure

1. **Choose Edit|Bookmark|Next Bookmark to move the cursor downward from the current position to the next bookmark.**

   To move the cursor upward, choose Edit|Bookmark|Previous Bookmark instead.

(3) Clearing bookmarks

There is a menu command for clearing all bookmarks.

Operating procedure

1. **Choose Edit|Bookmark|Clear Bookmarks.**

5.4.2.5 Command candidate function

As you type a command, a command list will appear. (Ctrl + Space key will also display the command list)
The command list will automatically scrolls to the first match.
Typing CA, for example, highlights CALL.

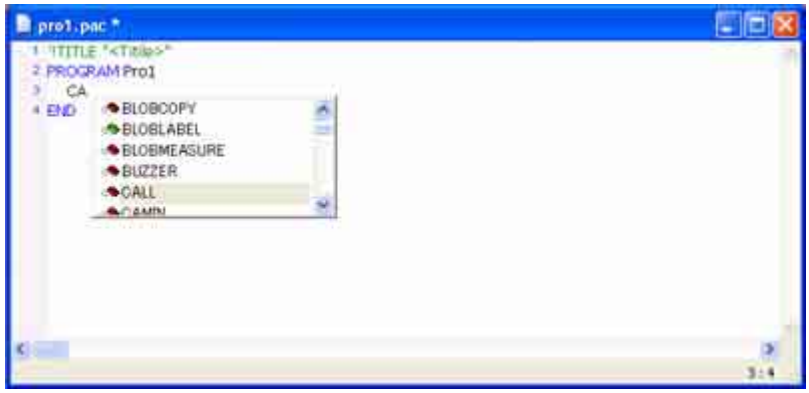

Selecting a command on this list displays a functional description to the right.
Double-clicking one inserts it in the text.

5.4.2.6 Insert command function

The Insert command submenu lists commands by function.

Selecting a command on this list inserts it into the program being edited.

Operating procedure

1. **Move the cursor to the insertion position.**
2. **Choose Edit|Command Input to list the commands by function.**

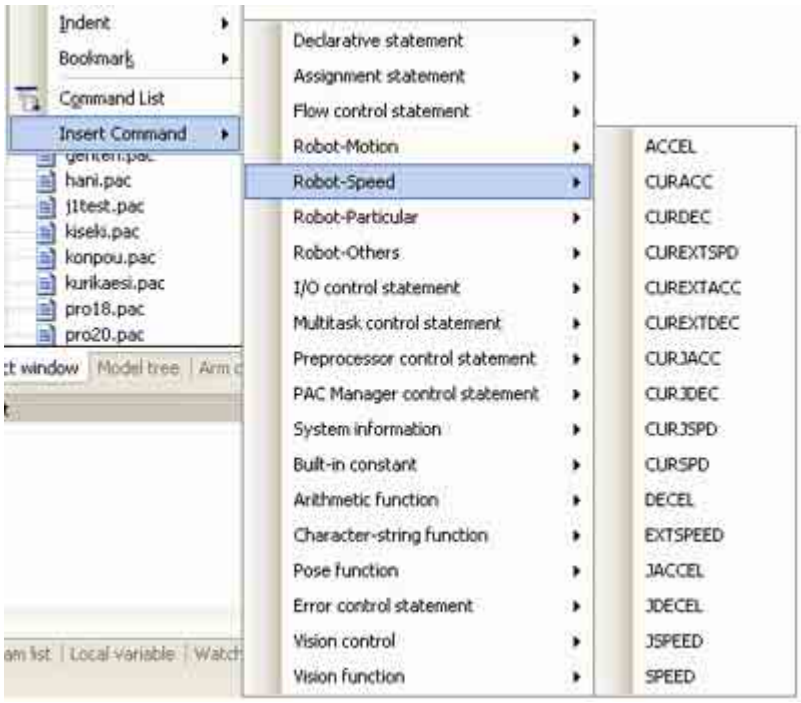

Note

Choosing a command inserts it with default values for any command parameters.

Edit these values without worrying about parameter syntax.

5.4.2.7 Command builder function

This is for command input through Command builder at the cursor point in the program being edited. Necessary parameters can also be input, allowing correct parameter statements.

You can also select from command searches or past commands entered. Help can be referred to for the commands shown, enabling quick command input.

Programs created by users in the project are also displayed, call programs can also be created.

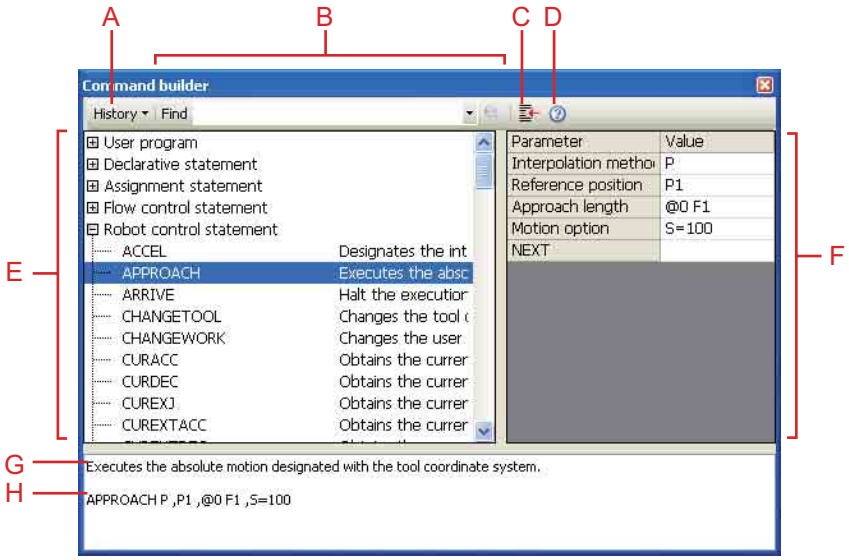

A: History

Select command from history of previously entered commands.

B: Find

Search commands using their names or description.

C: Insert

Selected commands are input at the cursor position on the program editing window.

D: Help

This displays the Help for the selected command.

E: Command list

Commands are listed by category.

P: Parameter

List of parameters for the selected command. Correct commands can be created by input into the values columns.

G: Brief description

Shows a simple description of the command.

H: Input command display

Displays the text inserted for the command, including the input parameters.

5.4.2.8 Insert registered character string

Allows registration of character strings commonly used in program editing for fast insertion.

(1) Register character string

Operating procedure

1. **Press the desired key to which the selected string should be assigned.**
2. **Choose Edit|Register string.**

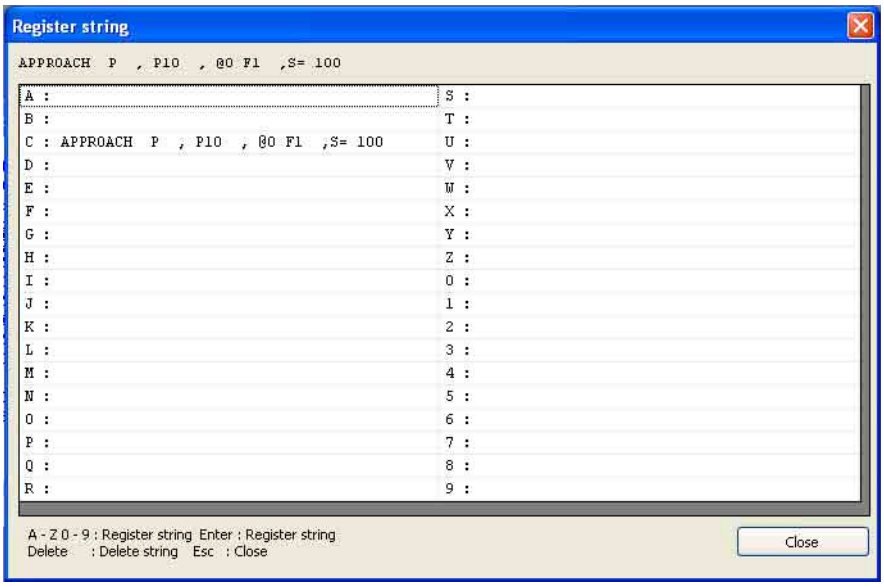

3. **Press the desired key to which the selected string should be assigned.**

(2) Insert registered character string

Operating procedure

1. **In the Program edit window, move the cursor to the line to which the registered string should be inserted.**
2. **Choose Edit|Insert registered string.**
3. **Press the key to insert the character string into the program edit window.**

5.4.2.9 Add comment function

Automatically adds comments to explain the applications of the variables and I/O during program editing.

Comments are added with "'//" placed after them.

If a further comment is added after changing the application description of the I/O and variables, the content from "'//" onwards is updated.

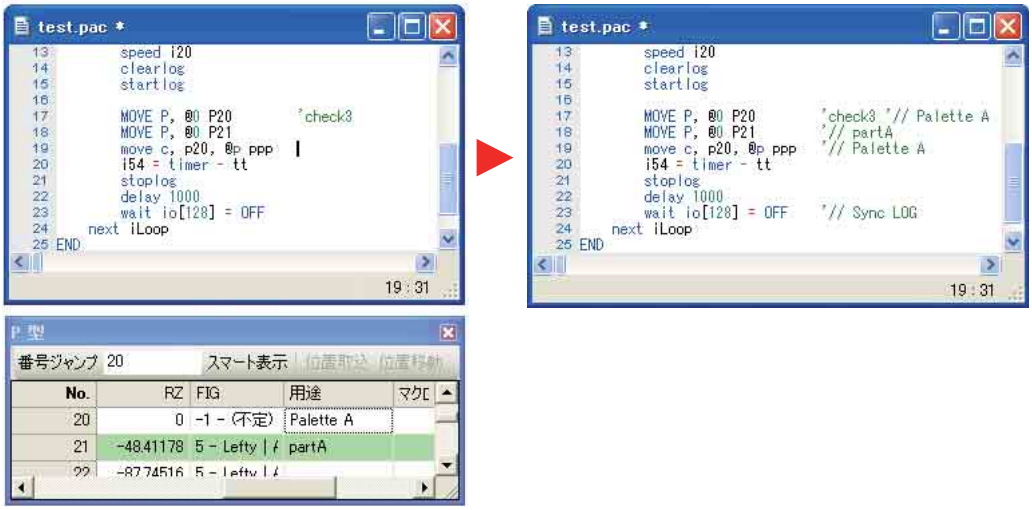

5.5 Program Bank

The program bank allows robot applications to share library programs/functions originally written for one specific robot or application.

Note

Program samples are already preset in the program bank. For further details on program samples, please refer to Programming Manual II.

5.5.1 Adding a program to a project

This adds a program from the program bank to a project.

Operating procedure

1. **Choose Project|Program Bank to display the eponymous dialog box.**

These programs are listed by category. Double-clicking a category displays the programs in that category.

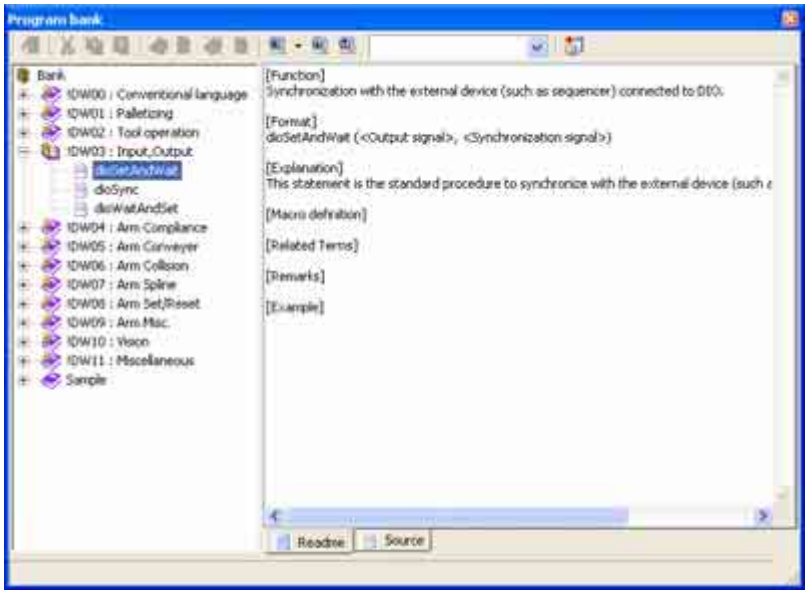

2. **Select a program.**

Two tabs switch between the documentation and source code for the selected program.

Readme tab

Proper documentation covers function, syntax, usage, conditions, limitations, and other particulars.

Source tab

This displays the source code for the selected program.

3. Press the Add program button to add the program to the folder selected in the Project window. Other programs within the project can then access this program with CALL statements.

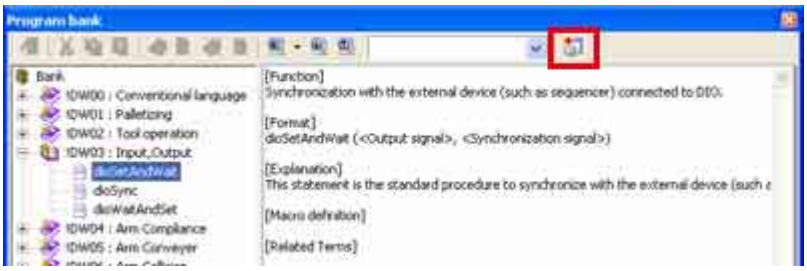

5.5.2 Adding a program to the program bank

The following procedure adds a user program to the bank register.

Operating procedure

1. Choose Project|Program Bank to display the dialog box.

2. Select the category.

The first dozen categories, with names starting with exclamation points (!DW00 to !DW11: Miscellaneous) are locked, so choose another category.

To add a new category, refer to 5.5.3 "Adding a category" (P. 84).

3. Press the Add program button to display the Add title dialog box.

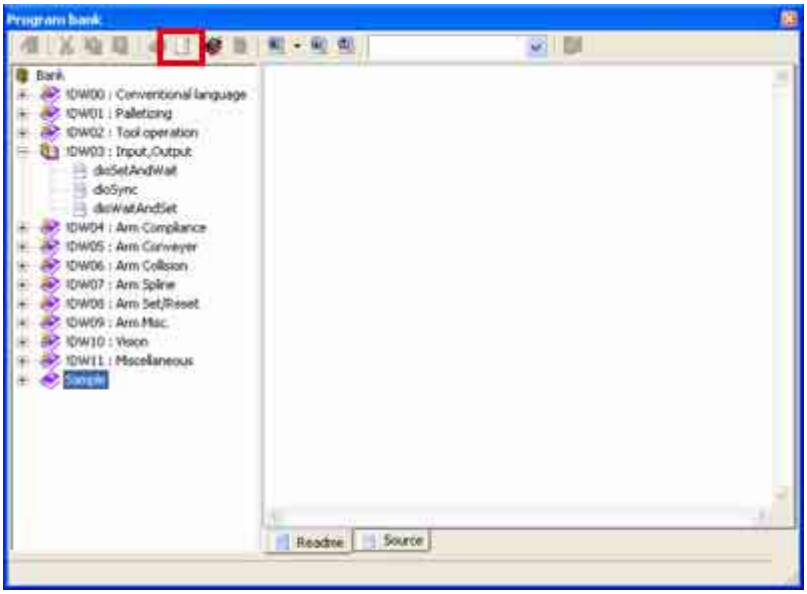

4. **Enter a title for the program and press the OK button.**

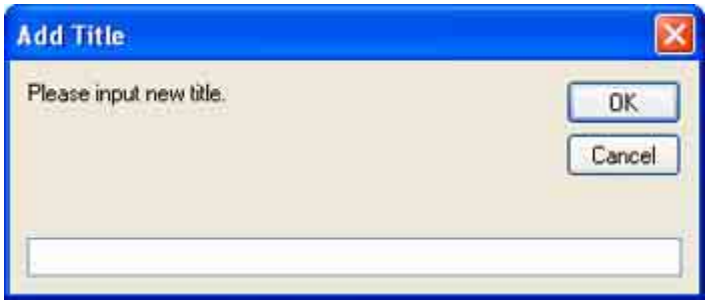

5. **Fill out the two tabs.**

For the Source tab, copying the contents of the corresponding Program edit window is much faster than re-typing the program.

6. **Press the Update button.**

This registers it in the program bank.

5.5.3 Adding a category

Operating procedure

1. **Select the root category, Bank.**

2. **Press the Add category button to display the eponymous dialog box.**

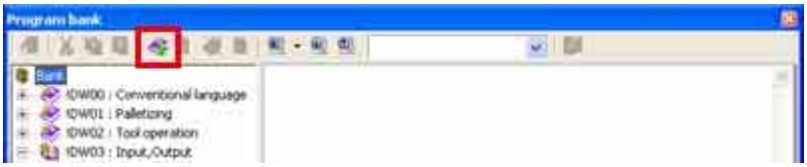

3. **Enter a name for the category and press the OK button.**

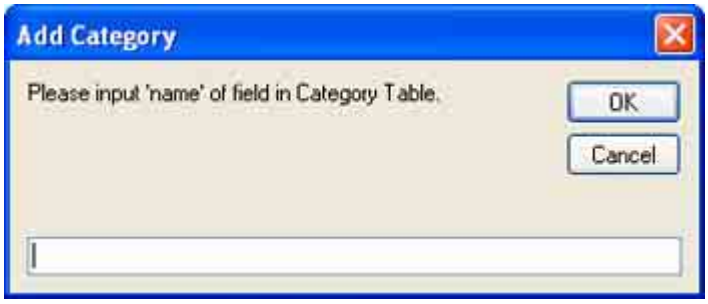

5.6 Editing a Teach Pendant (TP) Panel

A TP panel represents the interactive image displayed on the screen of the teach pendant attached to the robot controller.

5.6.1 Editing a TP panel

To edit a TP panel (*.pnl), double-click it in the Project or Program list window to open it in the Panel Designer window.

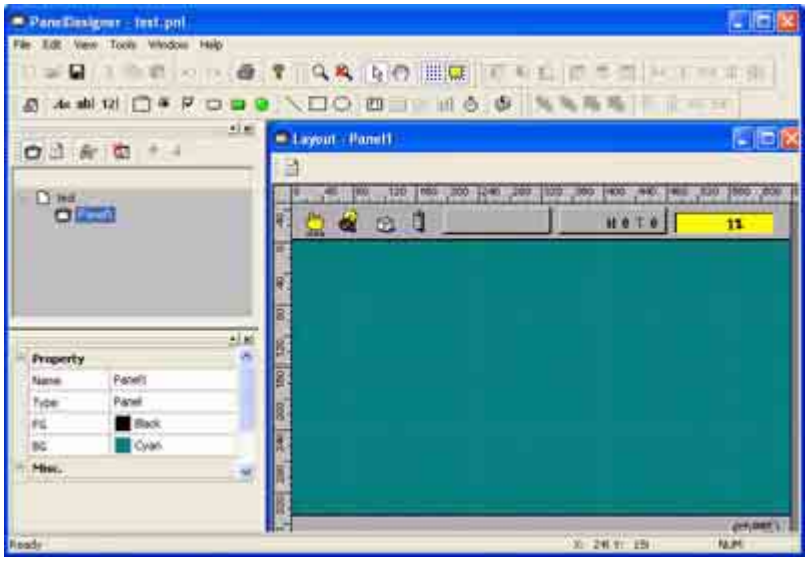

Note

- If the Project window does not show file names, press its Display files button.
- Panel Designer procedures appear in the Panel Designer User's Manual separately issued.

5.7 Folder Functions

Folders hold the key to hierarchical management of the program files in a project.

Grouping program files into folders by function or type adds structure that makes overall operation easier to understand and encourages compartmentalization, enhancing program portability to other projects.

5.7.1 Creating a folder

Operating procedure

1. Select the parent, the folder in the Project window to hold the new folder.

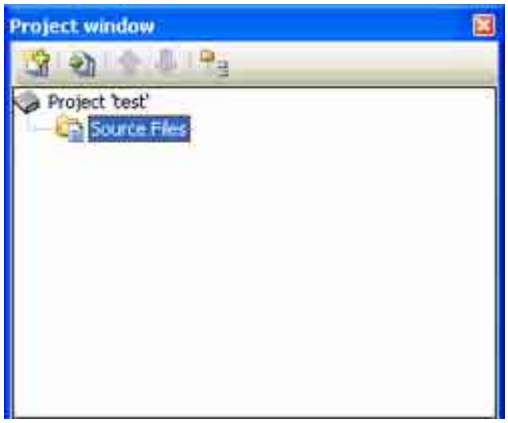

2. Choose Project|Folder|New to create a new folder and select its name for editing.

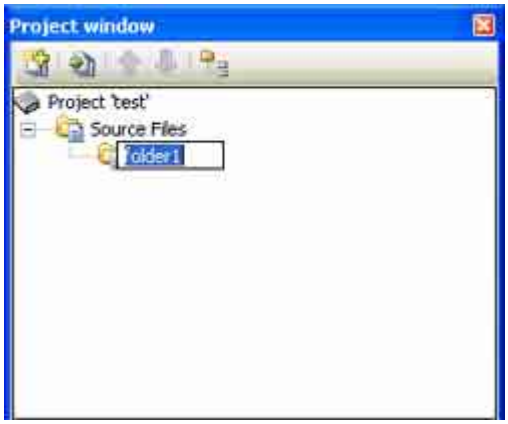

3. Enter a name for the folder.

Note

This folder name can be modified at a later date.

5.7.2 Importing an entire folder

Importing a folder is much faster than importing the files one at a time.

Operating procedure

1. **Select a folder in the Project window.**
2. **Choose Project|Folder|Import to display the Browse folders dialog box and specify the folder to import.**

3. **Press the OK button to copy the selected folder as well as the files inside to the target folder selected in the Project window.**

Note

If the target folder already contains a file with the same name, however, a dialog box asks permission to overwrite it.

5.8 Making Executables

5.8.1 Checking syntax

The following procedure runs a syntax check on the selected program.

Note

The target is the file in the currently active Program edit window.

Operating procedure

1. **Select the program to check.**
2. **Choose Project|Check Syntax to run the check and display the results in an Output window.**

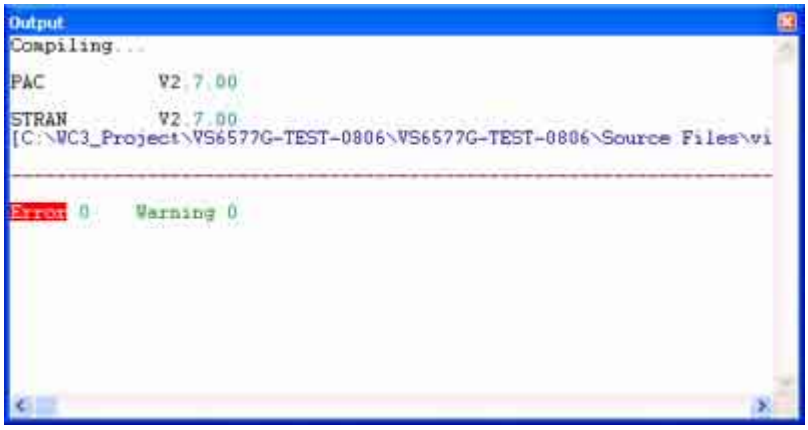

A syntax error triggers an error message consisting of an indication, error, the line number, and a brief note in the Output window.

Double-clicking on this message highlights the corresponding line in reverse in a Program edit window.

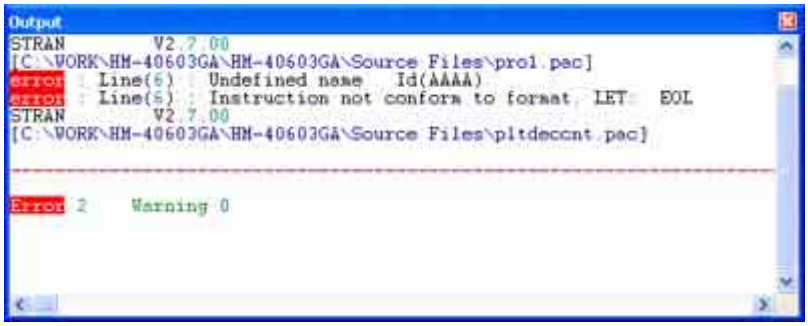

Note

There is an option for automatically running this check on the program after each save.

Choose Project|Properties to display the project property sheets and look for it on the Compiler tab.

5.8.2 Making executables

This batch operation applies to all files in the project.

Note

The update is conducted for all programs registered in the project.

Operating procedure

1. Choose Project|Compile to update the executables for the project.

An Output window in the Docking View window tracks progress and error messages from the compiler.

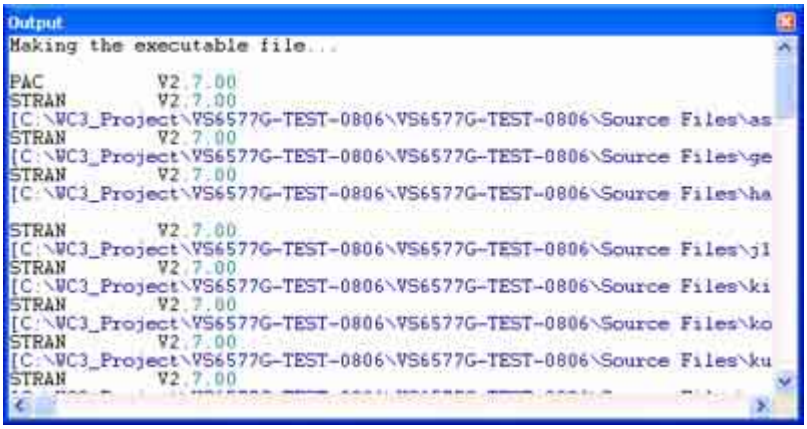

An error triggers an error message consisting of an indication, error, the line number, and a brief note in the Output window.

Double-clicking on this message highlights the corresponding line in reverse in a Program edit window.

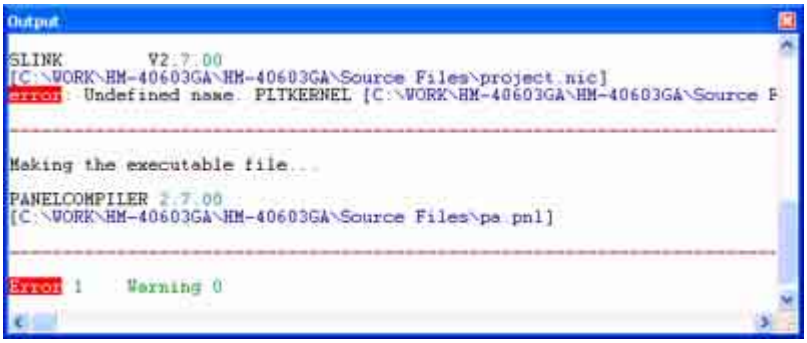

Note

- Checking executable operation requires first downloading it to the robot controller with the procedures in 4.7.2 "Data transfers" (P. 60).
- To specify file names for executables, choose Project|Properties to display the project property dialog box and select the Compiler tab.

Chapter 6 Arm 3D View Window

The Arm 3D view window displays, in three dimensions, the robot's current position and attitude.
Simulation allows the efficient and safe development of robot control programs without having to connect an actual robot.

During remote debugging, the robot arm on the screen responds to program commands.

6.1 Screen Descriptions

6.1.1 Arm 3D view

This window displays, in three dimensions, the robot's current position and attitude.

It is for visualizing robot activity, determining the robot's operation range, and, after adding other objects to the layout, detecting collisions with surrounding equipment.

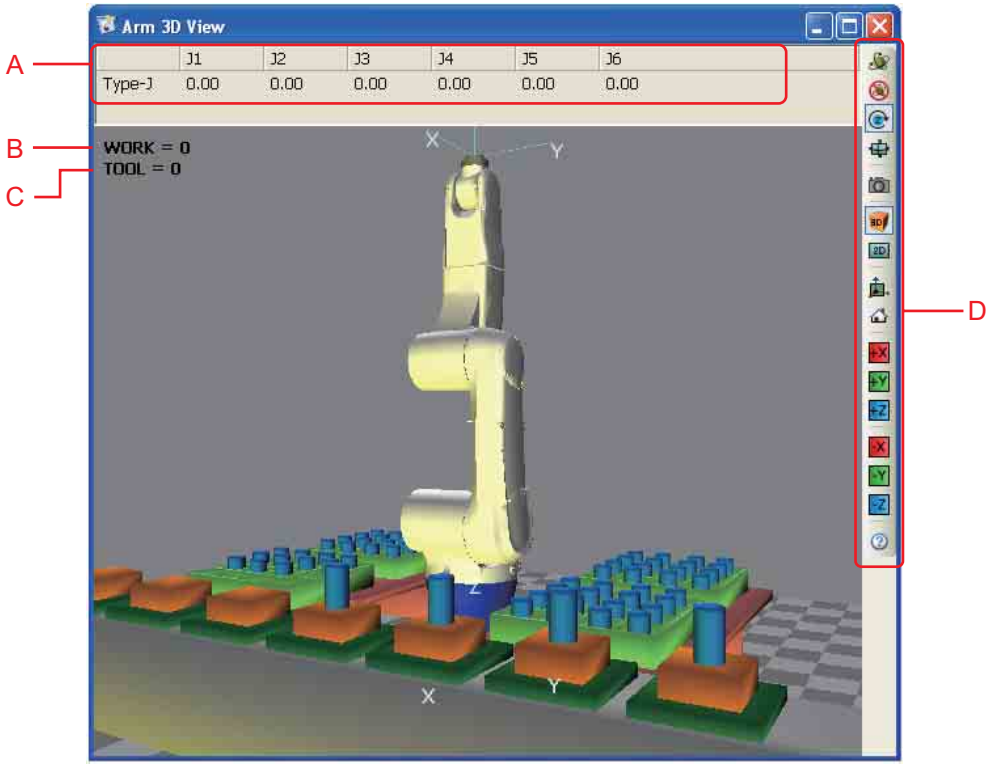

A: Current positions

This area displays the current values of robot position variables of types P, J, T, and J-EX.

The Arm|Display current angles submenu switches the layout here.

B: Work number

This area displays the current work number.

The Arm|Work coordinate monitor submenu switches between display/non-display of the layout here.

C: Tool number

This area displays the current tool number.

The Arm|Tool coordinate monitor submenu switches between display/non-display of the layout here.

D: Arm 3D view tool bar

D-1: Rotate

This rotates the view on the screen using a mouse.

D-2: Fixed view

This fixes the current view on the current position.

D-3: Rotation on Z-axis

This rotates the view on Z-axis using a mouse. (Default)

D-4: Rotate: screen bisection

This rotates the view on the horizontal/vertical axis.

D-5: Screen shot

This captures the current screen image and saves it as a file.

D-6: 3D screen

This switches the screen to the 3D (perspective projection) mode.

D-7: 2D screen

This switches the screen to the 2D (parallel projection) mode.

D-8: Move origin

This moves the origin of the base coordinates to the center of the screen.

D-9: Whole object

This resizes the display to show the whole object.

D-10: Change view (+X)

This shows the display viewed from the +X direction.

D-11: Change view (+Y)

This shows the display viewed from the +Y direction.

D-12: Change view (+Z)

This shows the display viewed from the +Z direction.

D-13: Change view (-X)

This shows the display viewed from the -X direction.

D-14: Change view (-Y)

This shows the display viewed from the -Y direction.

D-15: Change view (-Z)

This shows the display viewed from the -Z direction.

D-16: Help

This shows the operating procedure in the right corner of the screen.

Moused-based viewing operations

- Rotate: Left button + drag
- Pan: Left / right button hold + drag
- Zoom: Right button + drag

Moused-based robot / object operations

- Select: Left-click
  - Move object view to the center of the screen: Shift + left-click
  - Object full screen display: Alt + left-click
- Move: Ctrl + Left-click
  - Move in a straight line: Coordinate axis Left button + drag
  - Rotate: Ctrl + coordinate axis Left button + drag

6.1.2 Arm modeling

This window is for adding tools, work pieces, obstacles, and other objects to the equipment layout in the Arm 3D view window using 3D data from either the built-in simple modeling software or external sources.

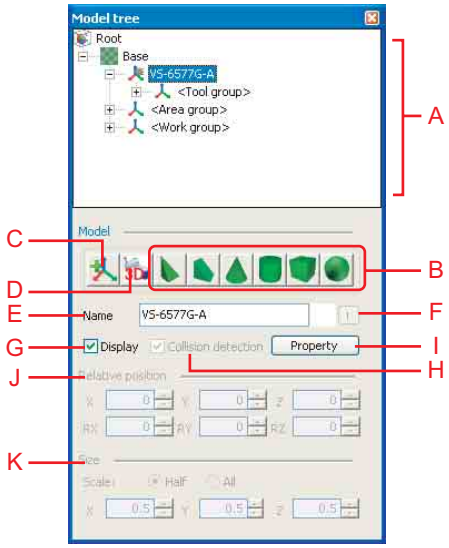

A: Object tree

This shows the object hierarchy behind the Arm 3D view.

Right-clicking anywhere in the object tree area displays the following context menu.

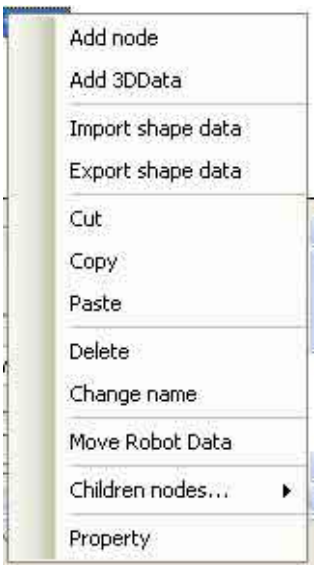

Add node

This is for adding a node underneath the selected object.

Add 3D data

This is for adding an object using 3D data from an external source.

Import shape data

This is for reading in existing modeling data.

Export shape data

This is for saving the modeling data for the selected node or object as a file.

Cut

This moves the selected object to the Windows clipboard.

Copy

This copies the selected object to the Windows clipboard.

Paste

This inserts the object in the Windows clipboard as a child of the currently selected object.

Delete

This deletes the selected nodes and objects.

Change name

This is for changing the name of the selected node or object.

Move Robot Data

This is for moving all data of Base objects including the robot on the object tree.

The robot data moves as a child of the selected node or object.

Children nodes...

All objects below the selected node can be expanded/collapsed, displayed / not displayed, interference checked / not checked.

Property

This displays the property sheets for the selected object.

B: Add buttons

These add an object of the shape indicated on the button. There are six shapes available.

C: Node button

This adds a node.

D: External button

This reads in 3D data from an external source.

E: Name

This field specifies a name for the selected object.

F: Color

This field specifies a color for the currently selected object.

G: Display check box

Selecting this check box displays the currently selected object in the Arm 3D view.

H: Collision detection check box

Selecting this enables collision detection for the currently selected object.

I: Properties button

This displays the property sheets for the currently selected object.

J: Relative position

These fields specify the relative position for the currently selected object.

X, Y, Z : Relative x/y/z coordinates in mm.

RX, RY, RZ : Angles relative to the corresponding axis, in degrees.

K: Size

These fields specify the dimensions for the object selected on the tree.

X, Y, Z : Dimensions along the x-, y-, and z-axes, in mm.

The radio buttons above offer a choice of specifying half- or full-sized measurements.

Note

- If the data of the selected object is 3D data imported, the Size fields specify the magnification. Assuming the original size of the 3D data as "1," specify the magnification.
- Imported 3D objects cannot be edited.
- Entering negative values into the Size fields inverts the object.

6.1.3 Arm operation

This window is for moving the simulated robot in the Arm 3D view window.

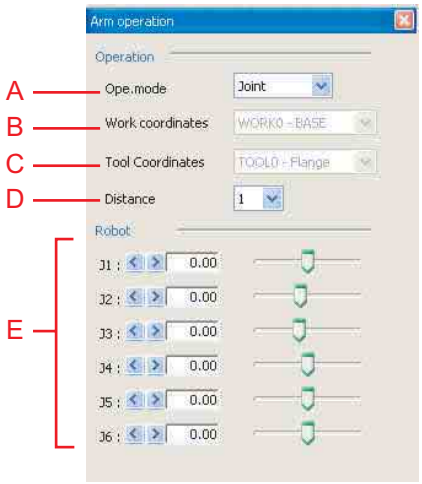

A: Ope. mode

Select movement mode.

- Axes: operates all axes.
- XY-bisection: moves according to the selected work coordinates. RX/RY/RZ rotate around the work coordinates centered on the tool origin point.
- Tool: moves according to the selected tool coordinates. RX/RY/RZ rotate around the work coordinates centered on the tool origin point.

B: Work coordinates

Select work coordinates.

C: Tool coordinates

Select tool coordinates.

D: Distance

Select the movement quantity unit with the Move position buttons.

E: Move position buttons

Moves the robot displayed in Arm 3D view in accordance with the selected movement mode.

6.2 Simple Modeling

The built-in tool is for quick and dirty modeling of the pallet bench, pallet, work, and other objects.

The Model tree window presents a hierarchical display of the objects in the Arm 3D view.

The top node is Root, which starts out with the following predefined nodes.

Nodes are virtual items to combine multiple objects and name them.

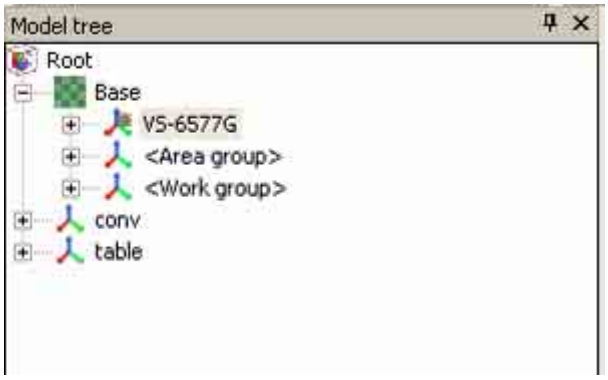

Work group

This group contains the coordinates for eight work pieces, Work0 to Work7.

Selecting the Display check box in the Model tree window displays the current coordinates in the Arm 3D view window.

The work group node relative positions reflect the Work coordinate settings. Choose View|Tool/Work/Area Settings|Work to display this window for modifying these settings. (Work0 cannot be edited on the base center.)

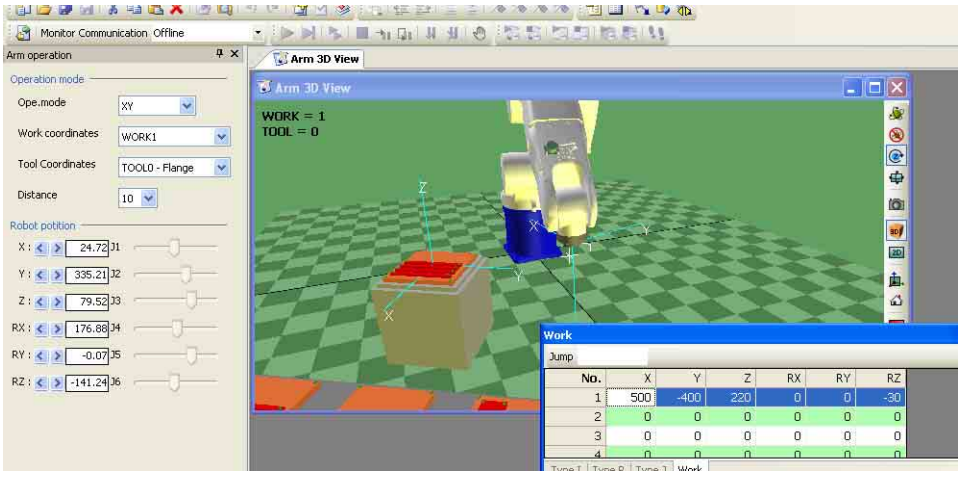

Tool group

This group contains the coordinates for sixty four tools, Tool0 to Tool63.

Selecting the Display check box in the Model tree window displays the current coordinates in the Arm 3D view window.

The tool group node relative positions reflect the Tool coordinate settings. (Tool0 cannot be edited on the base center.)

Area group

This group contains the coordinates for 32 areas, Area0 to Area31.

Selecting the Display check box in the Model tree window displays the current coordinates in the Arm 3D view window.

Adding nodes

A node may be added anywhere in the object hierarchy.

Select a node on the object tree, right-click, and choose Add node from the context menu that appears to add a new node as a child of the selected one.

Note

Grouping the pallet, pallet bench, and other objects under a common node, for example, enables copying and pasting them together as a single group.

6.2.1 Adding objects

The following is the procedure for adding the pallet bench, pallet, work pieces, and other objects to the Arm 3D view window.

Layout example

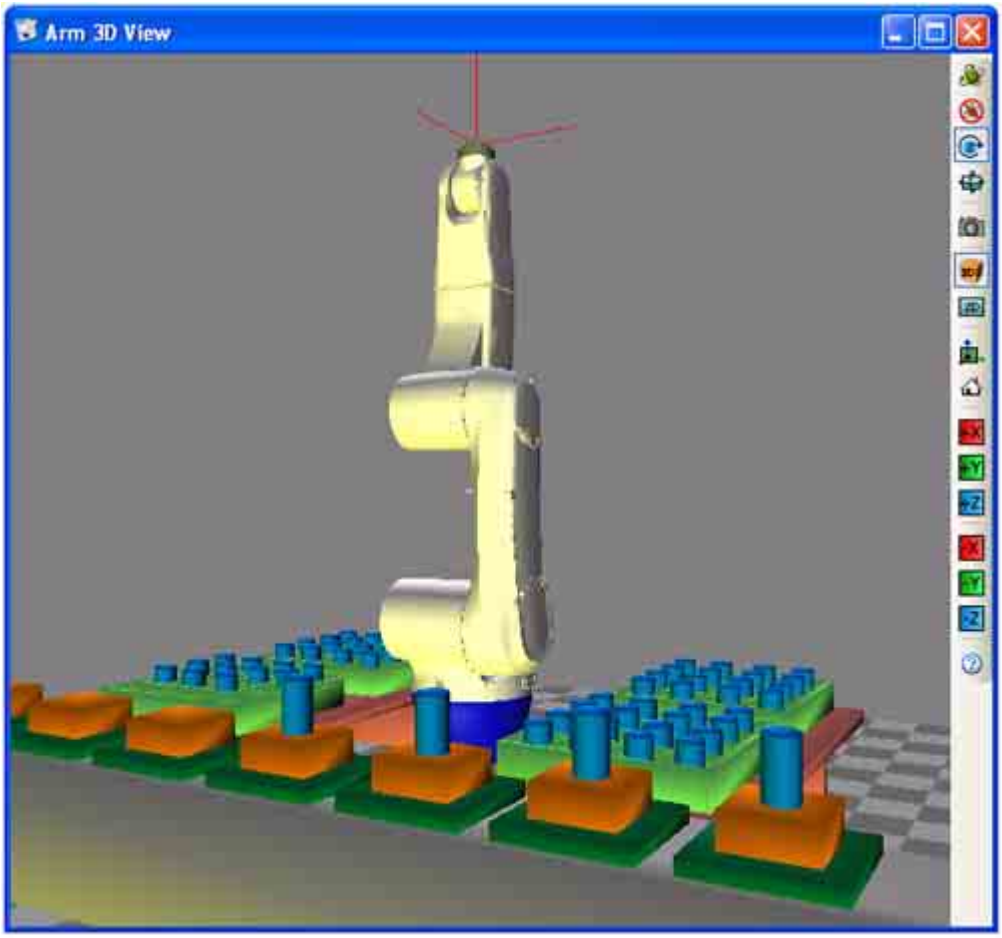

As our example, let's start with the pallet bench.

Operating procedure

1. Choose View|Arm View to display the modeling window.

2. Specify where to add to the model by selecting a node to be the parent.

3. Press the (Box) button in the Model tree window to add a box to the Arm view window.

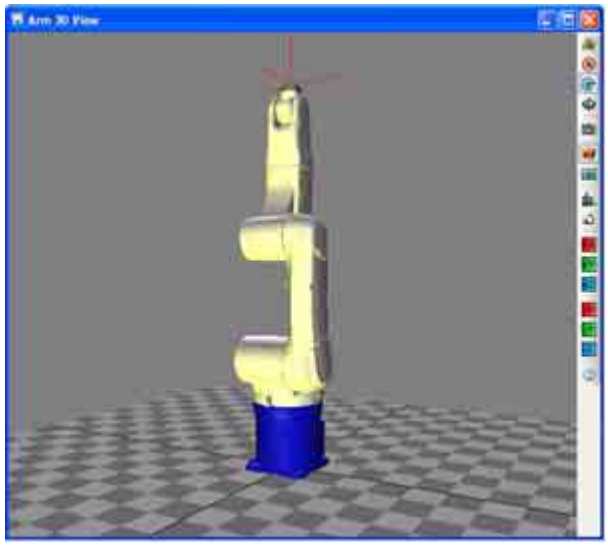

4. Modify the object to give it a name and a color.

Change name

Right-click on the object and choose Change name from the context menu that appears to highlight the name, ready for editing.

Changing color

To change the color of an object, press the Pick color button in the Model tree window and choose from the palette that appears.

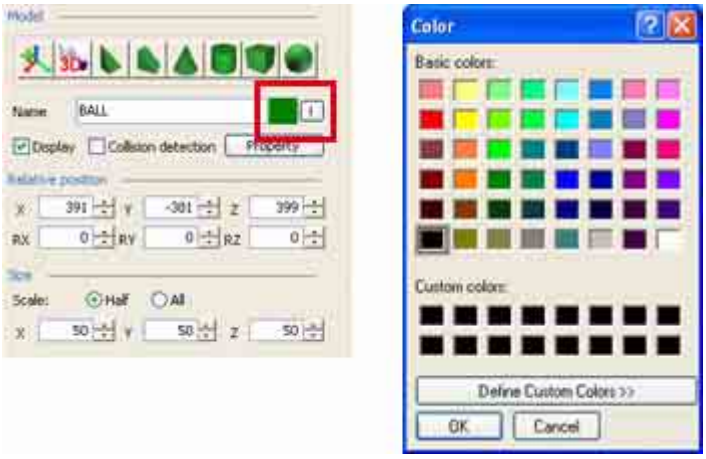

5. **Change the object's position and size.**

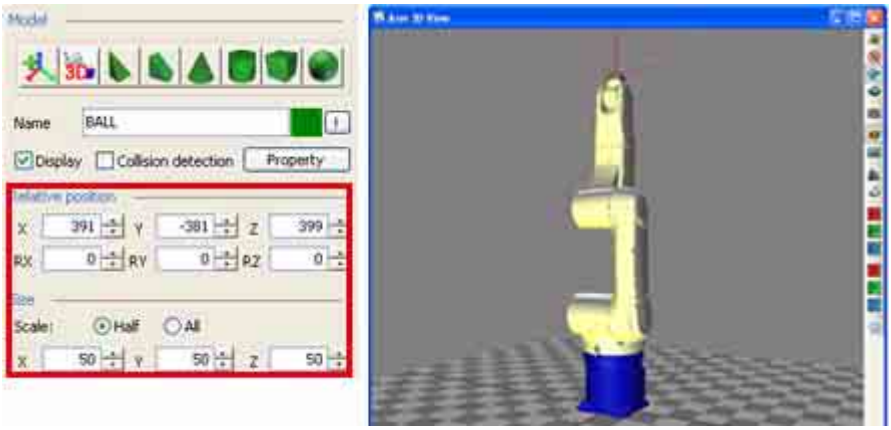

6. **Add two more boxes to complete the pallet bench.**

Note

Here, it is faster to copy and paste the above box as the second leg and then again as the starting point for the top.

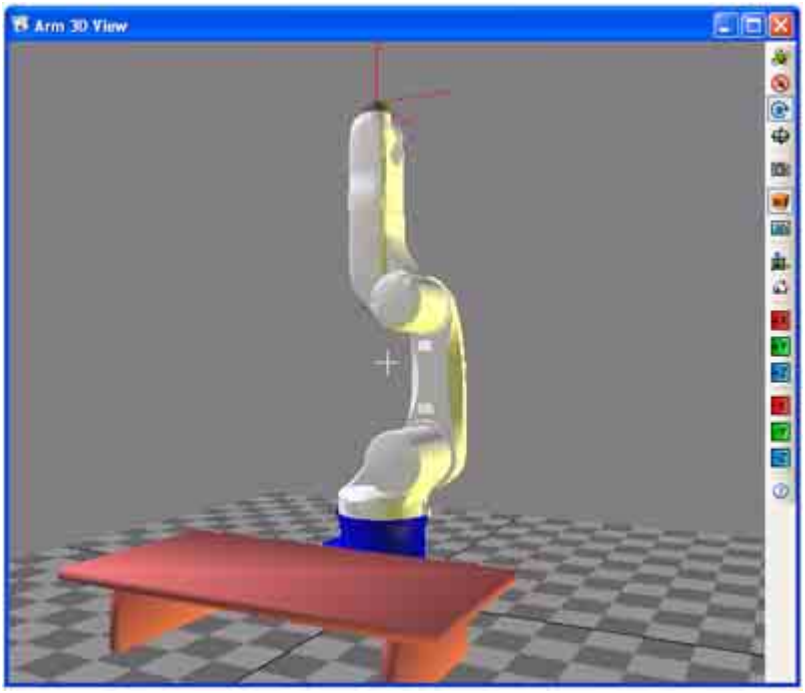

Note

The way the object is displayed can be altered with the Model tree Property button.

Pressing the Property button displays the dialog box below.

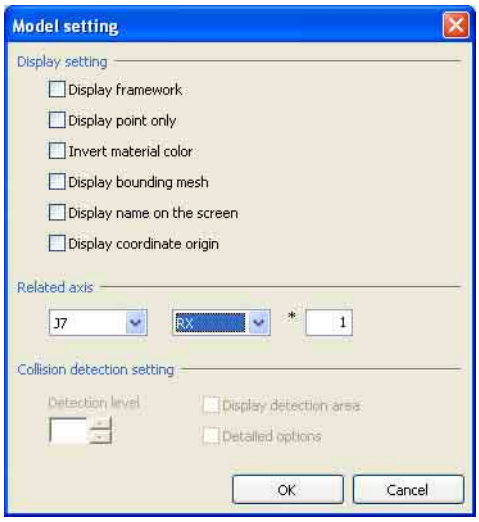

Display setting

Sets object display properties.

Related axis

Settings for objects moving in relation to the added axes in the case of projects with added axes or SMT7 controller. Set the axis, movement and movement units.

Collision detection setting

Detection level: Specifies the sensitivity for detection of collisions.

Display detection area: Displays the range for detecting object collisions.

Detailed option: Further options for the range for detecting collisions with imported 3D data.

6.2.2 Saving objects

Saving objects as modeling data files allows immediate reuse in other projects.

Operating procedure

1. **Select the object or node to export.**
2. **Right-click and choose Export data from the context menu that appears to display the Browse folders dialog box.**

3. **Select the target folder and press the OK button.**

Note

All objects contained in the selected nodes / objects are also saved.

6.2.3 Importing objects

The following is the procedure for reading in modeling data exported from another project.

Operating procedure

1. Select the parent node for the data.

2. Right-click on the object tree and choose Read shape data from the context menu that appears to display the dialog box for selecting a file to import.

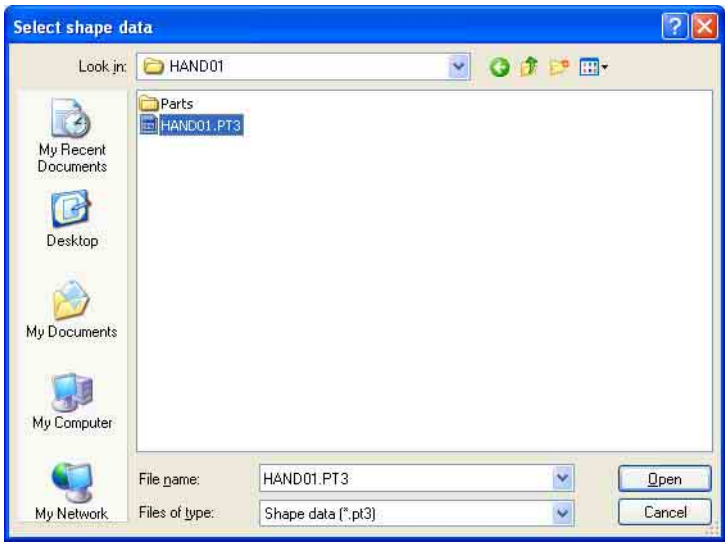

3. Select a file and press the OK button.

Selection is limited to shape files (*.pt3).

6.3 Importing 3D Data

The following is the procedure for adding an object using 3D data from an external source.

The following formats are supported.

- Directx file (*.x)
- VRML 2.0 file (*.wrl)

Note

WINCAPS III does not support the VRML 1.0 format.
Use VRML 2.0 (or VRML 97) format data.

Operating procedure

1. **Select the parent node for adding the object.**
2. **Right-click and choose Import modeling data from the context menu that appears to display the dialog box for importing such data.**

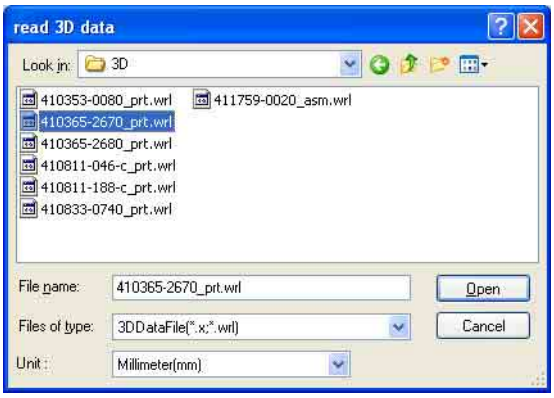

3. **Select a file and press the OK button.**

   The default format is DirectX. For VRML data, switch the file type to VRML (*.wrl).

   The corresponding object appears in the Arm 3D view.

Note

The units of the data scale may differ according to the software on which the 3D data was created. Select the appropriate unit and import.

Chapter 7 Online Functions

7.1 Overview

These functions are for monitoring robot controller variables, I/O, and other aspects of operation and for checking robot controller program operation under WINCAPS III control.

They cover all phases of robot application development.

Preliminary investigation with no actual equipment

- Equipment layout with 3D modeling
- Collision detection using this 3D model
- Dummy I/O input

Adjusting initial equipment setup

- Modifying variables and I/O
- Running programs

Troubleshooting equipment already in production use

- Monitoring variables and I/O
- Displaying error, operation, variable, I/O, and trace logs

7.1.1 Monitoring and debugging

The online functions serve two basic purposes.

Monitoring

This monitors the status of the robot controller.

Displays the robot's attitude in the Arm 3D view, and the variables, I/O, program executable lines. All types of variables can be edited.

This software can receive all log data and preserve them.

Debugging

In addition to monitor functions, programs in the robot controller can be executed on your PC for debugging.

⚠Caution

Debugging is not possible for robot controllers prior to Version 2.7.

The software also debugs programs, using the following functions.

- Adjust robot speeds
- Reset all programs
- Start/stop supervisory tasks
- Run programs
- Choice of Step-stop, Cycle-stop, Halt, and Program Reset
- Step in
- Toggle breakpoint
- Clear all breakpoints
- Breakpoint stop setting
- Dummy I/O for system inputs

7.2 Monitoring

For further details on connecting to a robot controller, refer to 1.5 "Connecting to Robot Controller" (P. 8) and 4.7 "Link with Robot Controller" (P. 59).

7.2.1 Initiating monitoring

Operating procedure

1. Choose Connect|Monitor Communication|Monitoring (online) to initiate monitoring.

Note

This menu command is only available when the robot controller is offline. It is not available during debugging (online).

2. Wait for monitoring to start.

A status bar appears to display the current monitoring status.

Note

When connection for online operation is complete, WINCAPS III windows automatically display robot controller internal data. Returning online brings you back to the project in the PC. (The received log data also remains in the PC project.)

7.2.2 Monitoring variables

There are three window types for monitoring variables.

7.2.2.1 Adding variables to the watch list

There are two ways to monitor variable's contents: directly selecting it to temporarily display its value as pop-up tip text and adding it to the Watch list.

Operating procedure

1. Double-click a program in the Project or Program list window to display that file in the Program view area.

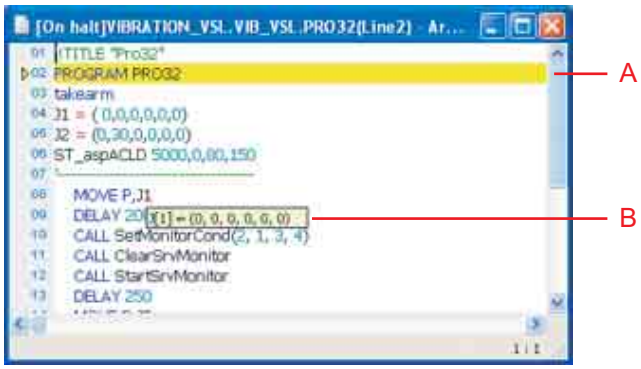

A: Current step (line)

Highlighting indicates the current program line.

B: Variable contents

The contents of the currently selected variable appear as pop-up tip text.

2. Select a variable and choose Debug|Show Quick Watch to display this dialog box.

3. Press the Register button to add the selected variable to the Watch list.

For further details on Watch window settings, refer to 7.2.2 "Monitoring variables" (P. 105).

7.2.2.2 Confirm the registered watch items.

This window displays variables from a user configurable list.

Operating procedure

1. Choose View|Watch to display this window in the Docking view area.

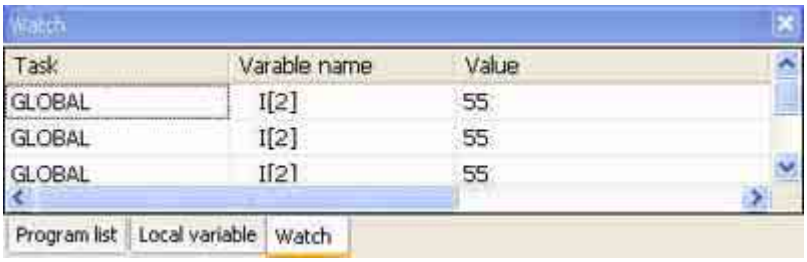

Task

This displays the program name.

Variable name

This displays the registered variable names.

Value

This displays the variable values.

Type

This displays the variable types.

Log

Select Valid / invalid for the log.

Select Valid if a log is to apply.

7.2.2.3 Checking global variables

This window type displays global variables of types I, F, D, V, P, J, T, and S.

Operating procedure

1. Choose View|Variables and choose a type from the submenu to add the corresponding window in the Docking view area.

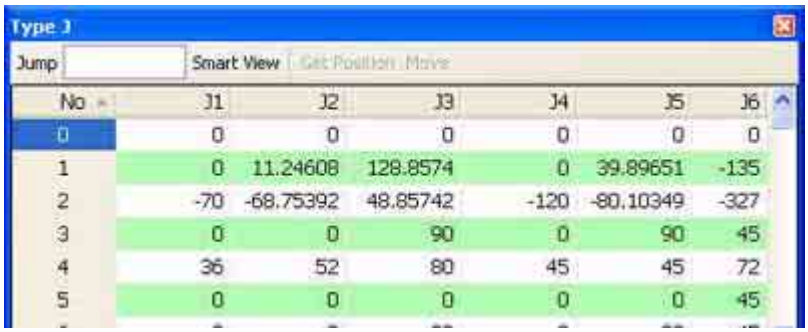

Jump

Displays the specified number.

Smart View

Displays only variables with a check in the Smart column.

No.

Displays the variable numbers.

Value

Displays the value.

Application

The user can enter the application. When the Add comment function is in use, text input for the Application is added to the program as a comment.

Macro name

Enter the name of macros usable in the project.

Smart check box

Only those variables checked will be displayed.

7.2.2.4 Checking local variables

This window type displays local variables for the currently selected program.

Operating procedure

1. **Choose View|Local Variables to display this window in the Docking view area.**

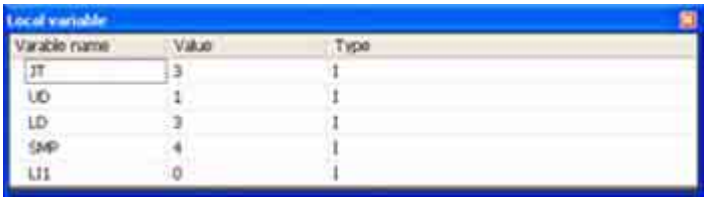

Variable name

Displays the variable names.

Value

Displays the value.

Type

This displays the variable types.

7.2.3 Monitoring I/O

The I/O window shows the current I/O states.

Operating procedure

1. Choose View|I/O Window to display this window in the Docking view area.

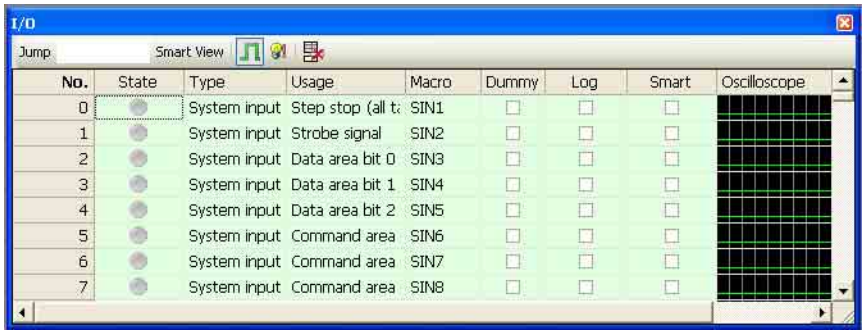
I/O
Jump
Smart View
No. State Type Usage Macro Dummy Log Smart Oscilloscope
0 System input Step stop (all t SIN1
1 System input Strobe signal SIN2
2 System input Data area bit 0 SIN3
3 System input Data area bit 1 SIN4
4 System input Data area bit 2 SIN5
5 System input Command area SIN6
6 System input Command area SIN7
7 System input Command area SIN8

Jump

Displays the I/O of the specified number.

Smart View

Displays only I/O with a check in the Smart column.

Oscilloscope display button

Turns on/off the Oscilloscope display.

Dummy input button

Dummy input is possible for I/O with a check in the Dummy column.

Hide unused field button

Pressing this button hides unused fields, fields to which no I/Os are assigned as shown with "--" in the Type column.

No.

I/O port number.

State

A green icon is displayed when on and gray when off. You can switch between on/off by clicking on the icon when in Dummy input mode.

Type

Displays the I/O type. Displays I/O port type: input/output, exclusive/universal, internal/hand I/O, etc.

Application

Users can add comments for each I/O port. Already input in exclusive signals, etc.

Macro name

Input the macro handling the I/O as the name inside the program. This is already input but can be freely changed.

Dummy

Dummy operations are possible for I/O with a check in this column.

Log

I/O with a check in this column will have a log record. The upper limit is 50 at a time.

Smart

Press the Smart view button to display only I/O with a check.

Oscilloscope

Displays whether the I/O is on/off in oscilloscope fashion. On/off changes can be checked with a time-line.

7.2.4 Monitoring robot

The Arm 3D View window shows the robot's current attitude.

The trajectory of the robot's hand movements can be displayed.

This trajectory display can be operated by choosing Arm|Movement history.

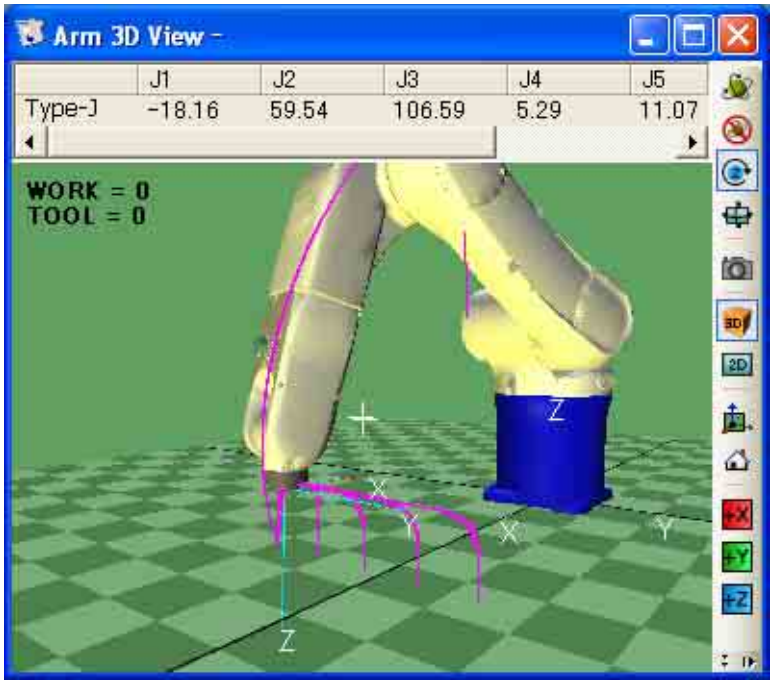

7.2.5 Errors during monitoring

A robot controller error displays a WINCAPS III error message.

7.2.6 Validate the controller function extension

This enables validation/invalidation of controller function extensions from WINCAPS III.

Select Tool|Controller function extension in online (monitor) mode to open the Controller function extension dialog box.

Enter the password number for the function to be extended and press on the Add button to validate it.

To invalidate them, enter the validation password number and press the Delete button.

7.3 Using Debugging

Robot controller version 2.7 or later

For further details on connecting to a robot controller, refer to 1.5 "Connecting to Robot Controller" (P. 8) and 4.7 "Link with Robot Controller" (P. 59).

7.3.1 Initiating debugging

First the robot controller must satisfy the following conditions.

- The mode selector switch (physical switch) on the teach pendant or mini-pendant must be in its AUTO position.

- The communications link must be properly configured.
  Link type

  For Serial (RS-232C) (COM2) : This must allow read/write access.

  Ethernet : The individual address list must allow read/write access from the computer. Only computers with Read/write in the column circled in red can initiate debugging.

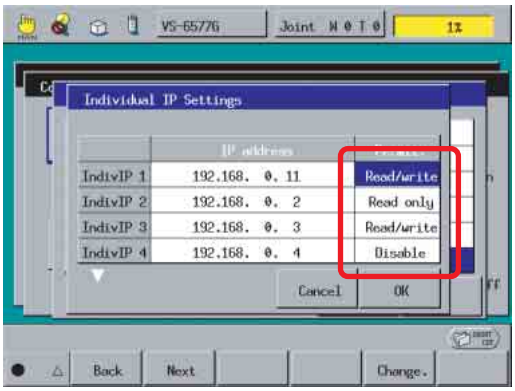

  For further details on configuring the robot controller, please refer to its Setting Guide.

- No PAC programs are running.
- All motors are OFF.

⚠Caution

- The WINCAPS III debugging functions are for running robot programs and controlling operation from the computer.
  To ensure safety, always stay within reach of an Emergency stop button on the teach pendant, the mini-pendant, or the equipment.
- Never debug over a link that puts the equipment out of sight of the operator at the computer.

Operating procedure

1. Choose Tool|Option and select the Enable online-debug mode check box on the General tab.

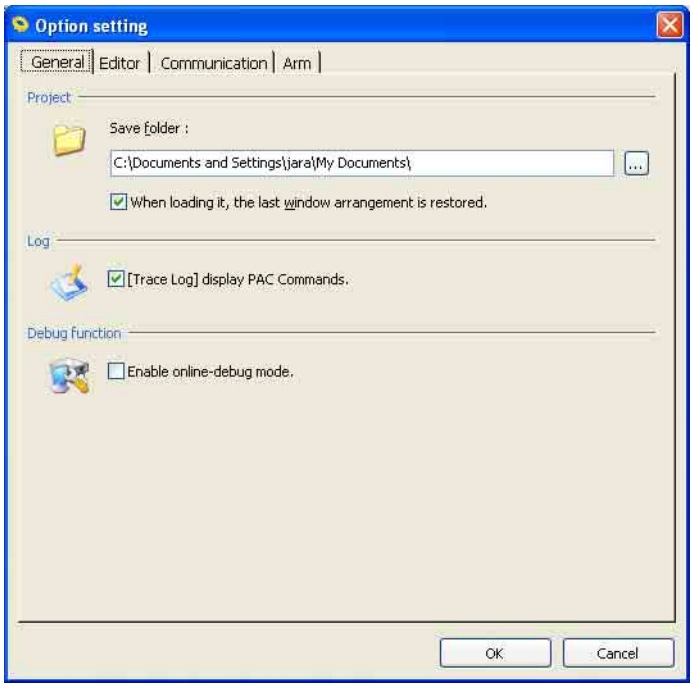

Note

- Leaving Enable online-debug mode deselected disables all debugging functions, so selecting one during online operation triggers an error message.
- WINCAPS III always starts with debugging disabled.

2. Choose Connect|Debugging (online) to initiate debugging.

A status bar appears to display the current debugging status.

A Stop button also appears independent of WINCAPS III.

Status bar

Stop button

The teach pendant or mini-pendant also display a Debugging status screen.

Automatic aborting of debugging

WINCAPS III and the robot controller automatically switch to offline operation if any of the following situations arises.

- Someone switches the pendant's mode selector switch away from its AUTO position.
- They detect severance of the link between them.
- They detect severance of the robot controller's link with the teach pendant or mini-pendant.
- The robot controller loses power.
- A password-protected screen saver kicks in.

Side effects

Switching to offline operation triggers the following cleanup operations.

- Stopping PAC programs
- Turning off motors
- Stopping supervisory tasks
- Closing teach pendant (TP) panels
- Clearing all breakpoints
- Clearing all dummy I/O settings

Note

When connection for online operation is complete, WINCAPS III windows automatically display robot controller internal data.

⚠Caution

Debugging imposes the following restrictions.

- Only the computer doing the debugging can run PAC programs (or supervisory tasks) or turn on motors, not a teach pendant, a mini-pendant, I/O devices, or other computers running the ORiN SDK.
- The teach pendant cannot load programs.

7.3.2 Launch the program from WINCAPS III.

In addition to monitoring, WINCAPS III runs and debugs programs stored inside the robot controller.

Operating procedure

1. **Double-click the program to execute in the Project or Program list window to display it in the Program view area.**
2. **Choose Debug|Start a Task to display a confirmation dialog box.**

3. **Select an option and press the OK button to run the robot program as specified.**

   The robot will operate following the program's commands.

   The Arm 3D view, if open, tracks actual robot operation.

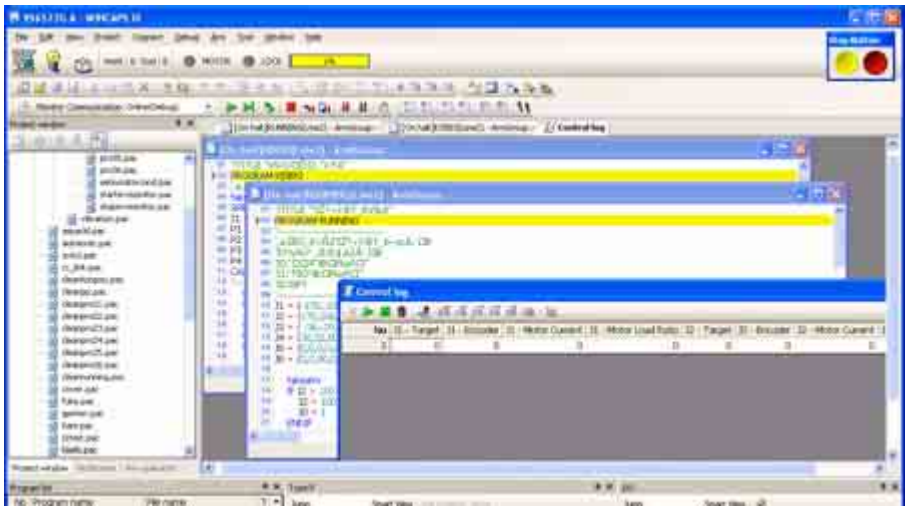

Note

When debugging supervisory tasks from WINCAPS III, the following functions are used.

- Step in, Step-stop
- Halt
- Program reset
- Toggle breakpoint

Note that stop commands to all programs, such as Emergency stop and Reset all programs, cannot stop supervisory tasks.

⚠Caution

The WINCAPS III buttons are useless if the computer crashes or the communications link is lost. To ensure safety, always stay within reach of an Emergency stop button on the teach pendant, the mini-pendant, or the equipment.

7.3.3 Controller settings

Debugging allows WINCAPS III to modify the robot controller's operating settings.

The following settings are accessible.

- Motor
  These control power to the corresponding motor.
- Machine lock
  The ON setting locks the robot, limiting WINCAPS III control to the simulation.
- I/O lock settings
  These duplicate the teach pendant settings under F4 (I/O), F6 (auxiliary functions), and F7 (I/O Lock).
- External speed settings
  These modify the Speed, Acceleration, and Deceleration speed settings.

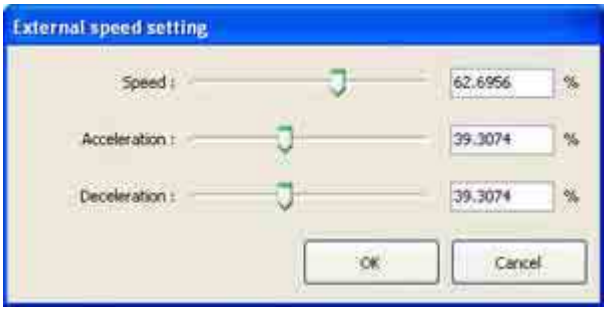

- Automatic mode settings (Standard robot controller specifications only)
  The choices are external and internal.

7.3.4 Input signal dummy operation

Operation of the program can be checked even without peripheral devices linked by dummy alteration of the I/O input signal.

7.3.4.1 Configuring dummy I/O

Dummy operation of the I/O requires selection of the input signal to be operated.

Operating procedure

1. **Choose View|I/O Window to display this window in the Docking view area.**

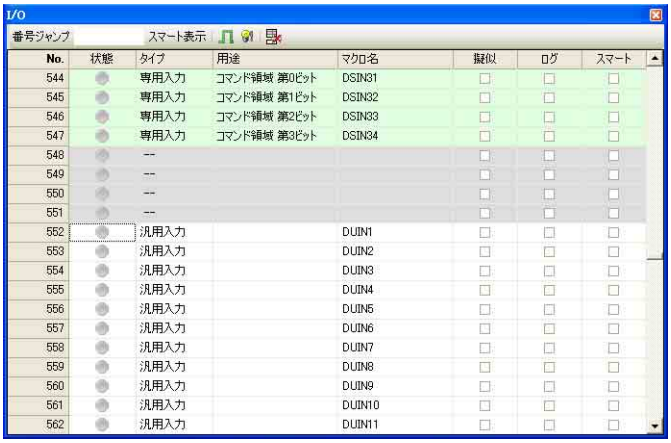

2. **Switch on the Dummy check box for the dummy operation input signal.**

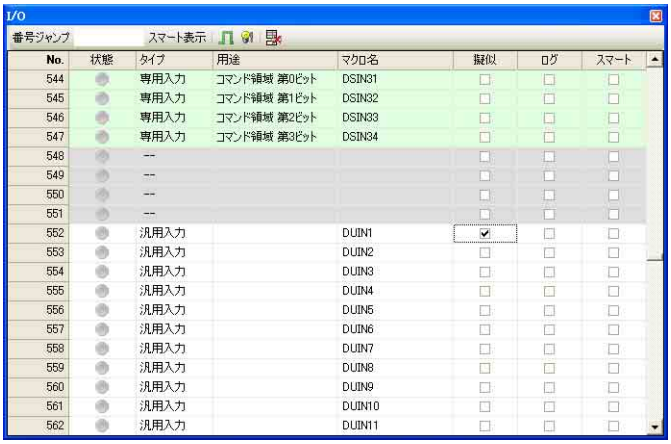

If several input signals are set, specify the range by dragging and combine them by selecting Enter dummy check or Remove Dummy check using the mouse right-button menu.

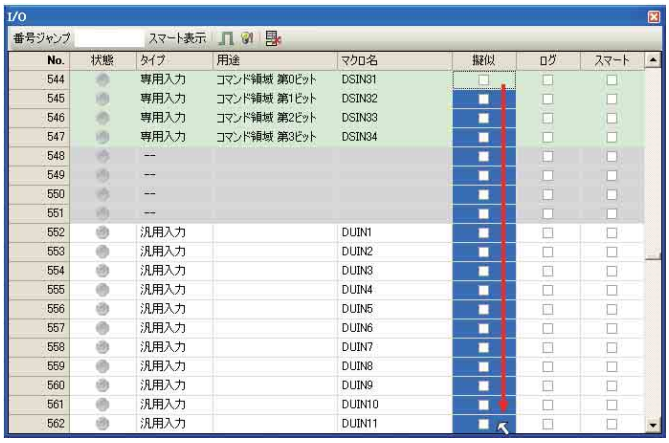

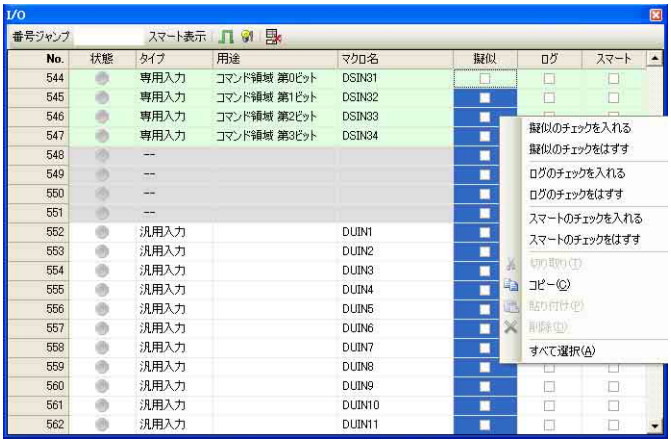

3. Press the Dummy input button to reflect the dummy I/O settings in the robot controller.

Press the Dummy input button again to remove the robot controller dummy I/O settings.

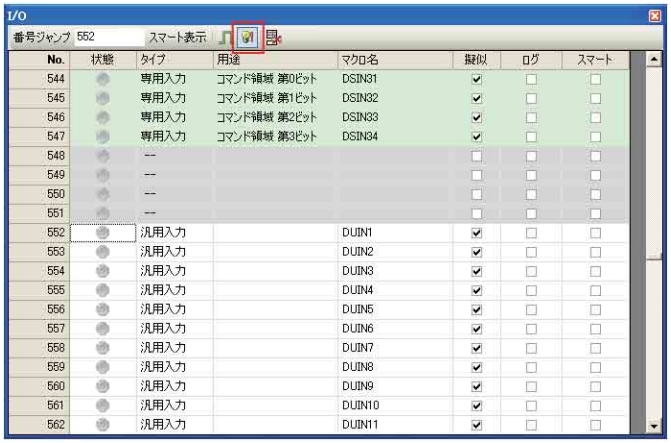

Note

- If communications errors occur using DeviceNet or other field networks, dummy input settings cannot be made unless field network display error settings are 1:Default. Refer to Field Network Display Error Parameters in the RC7M Controller Manual Option Equipment Manual regarding such display errors.
- Dummy I/O settings are not possible for applications listed as Reserved for exclusive input. Switch the Dummy check boxes off before using.

7.3.4.2 Input signal on/off operation

Press the Status lamp of the input signal to be turned on/off. When lit green it is on, when gray it is off.

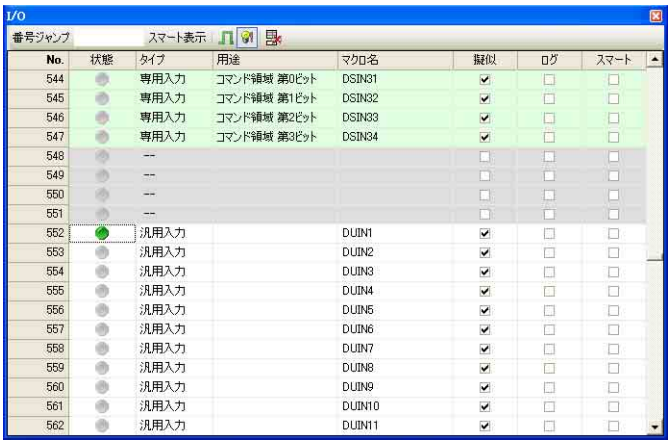

7.3.4.3 Exclusive input signal on/off operation (DIO command viewer)

In debugging exclusive input signals can also be dummy operated. (With monitoring non-exclusive input signals can be dummy operated.)

Dummy I/O configuration is the same as for other input signals, but on/off can be operated through the DIO command viewer as well as the standard method.

The DIO command viewer can be used when the I/O assignment mode is Mini I/O exclusive or Standard. Command and data fields are automatically turned on/off in response to the I/O command functions. For I/O commands, refer to the Command Execution Input/Output Signals of the RC7M Controller Manual or the Command Execution Input/Output Signals (standard mode exclusive) of the RC7M Controller Option Equipment Manual.

Operating procedure

1. **Choose Tool|DIO command viewer.**

(This screen shows standard I/O assignment mode.)

2. Select desired items from the pull down lists for Command field and Data field 1, and input appropriate values in Data field 2.

Odd parity is automatically set.

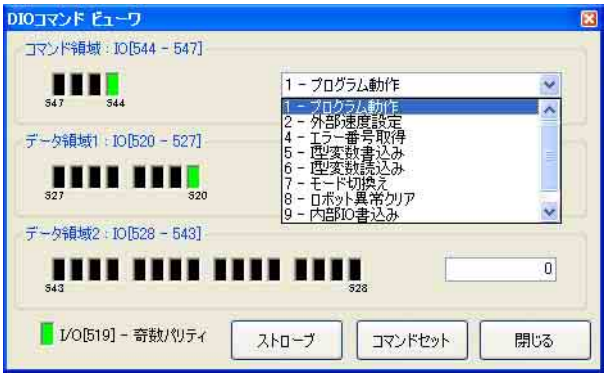

3. Press the Command set button

The on/off status of the Command field, Data field 1, Data field 2 and Odd parity are reflected in the robot controller.

4. Press the Strobe button.

The robot controller strobe signal will turn off then on again, and the command will be executed.

Chapter 8 Logging

Various types of logs can be recorded for robot operations and viewed or saved.

This data can be put to use to search out the causes of errors and remedy them to shorten cycle time.

Recording times, saving fields and acquisition methods differ according to the type of log.

The number of logs recordable is decided by log types. The number and intervals (fineness) of control logs and servo data logs can be set.

The three types of memory fields for recording log data are as follows.

- DRAM
  Data will be lost in this field when the controller's power is switched off.
- SRAM
  Data is retained even when the power of the controller is switched off (though it will be lost if the memory backup battery fades)
- Flash memory
  Data is retained even when the power of the controller is switched off (even if the memory backup battery fades)

The types of logs usable in WINCAPS III are as follows.

Log name	Acquisition timing	Acquisition interval	No. saved	Data record memory	Error trigger log
Error log	Regularly saved	When errors occur	1,000	SRAM	○
Operation log	Regularly saved	When operational event occurs	1,000	SRAM	○
Control log	Manual / program	Select from 8/16/24/32 ms	1,250 to 30,000	DRAM*	○
Trace logging (multi)	Manual / program	Command execution	10,000	DRAM	○
Single-trace Log	Manual / program	Command execution	10,000	DRAM	×
Variable log	Manual / program	Log opening / update of values	1,000	DRAM	×
I/O log	Manual	Log opening / update of values	1,000	DRAM	×
Joint servo log for particular joint	Program	Select from 1-8 ms	1,250	DRAM	×

* Control log data can be manually copied to flash memory.

8.1 Log record timing

Logs are recorded at four different times as follows.

- Regular recording
  Error logs and operational logs are regularly recorded. 1,000 logs can be recorded for each, with the latest 1,000 being retained.
- Manual recording by WINCAPS III or the teach pendant.
  Recording can be started and stopped manually using WINCAPS III or the teach pendant.

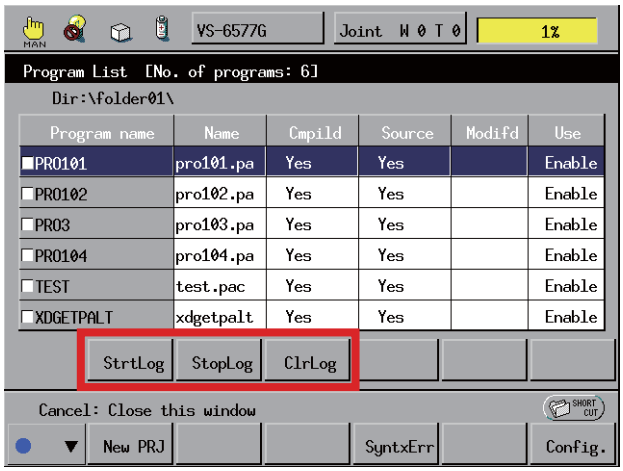

- Recording by program commands
  Settings are available to start / stop log records or clear them in programs. This is used when you wish to record a particular operation in a program. The three commands used are STARTLOG, STOPLOG and CLEARLOG.
  It is also possible to determine the range of logging by specifying program lines in WINCAPS III.
- Error trigger log
  A record log is saved in flash memory when a specified error occurs. Error logs, operational logs, control logs and trace logs (multi) are available. This is used when searching for the causes of errors.
  Errors specifiable by the error trigger are of two types: those specified by error level and those of a particular error code.

8.1.1 Recording by program commands

The timing when logs are recorded can be controlled by program commands, the teach pendant, and WINCAPS III for control / trace / single trace / variable / servo single axis data logs. These logs use a memory field called a ring buffer. The ring buffer has a set capacity and overwrites its oldest data with the latest. By using the three following commands logs can be retained for program-specified areas. Control log commands will be used as examples to explain recording to the ring buffer.

- STARTLOG
  Begins writing of data not to be updated to the ring buffer. When the ring buffer is full of non-updatable data no new logs can be written to it.
- STOPLOG
  Changes log data recorded in the ring buffer at that point into non-updatable data and retains it. If STARTLOG is being executed log data between STARTLOG and STOPLOG will be retained.
- CLEARLOG
  Deletes data retained in the ring buffer, and begins recording of updatable data in new logs.

The relationship between the above three commands and the retained log data is shown here. In this example the ring buffer size is set at 20.

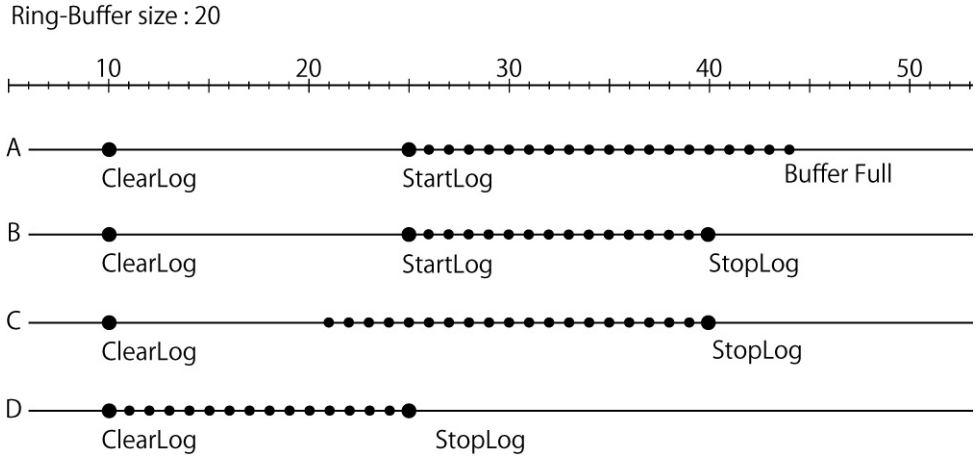

Case A

Recorded control logs from 25-44.

20 control logs are recorded after StartLog, taking up all space in the ring buffer with 20 sets of log data retained.

Case B

Recorded control logs from 25-40.

Only 16 control logs are retained from after StartLog to StopLog.

Case C

Recorded control logs from 21-40.

The 20 control logs recorded up until StopLog are retained.

Case D

Recorded control logs from 10-25.

The 16 control logs recorded from ClearLog to StopLog are retained.

8.1.2 Error trigger log

A record log is saved in flash memory when a specified error occurs. Error logs, operational logs, control logs and trace logs (multi) are available. This is used when searching for the causes of errors.

Errors specifiable by the error trigger are of two types: those specified by error level and those of a particular error code.

Configuring with teach pendant

Error trigger logging records a log when the specified error occurs for the first time from the configuration of the error. It does not update the log data until the error is configured again.

Press F6 (Setting)|F2 (Log)|F5 (Error trigger) and specify the error logging mode (1 or 2).

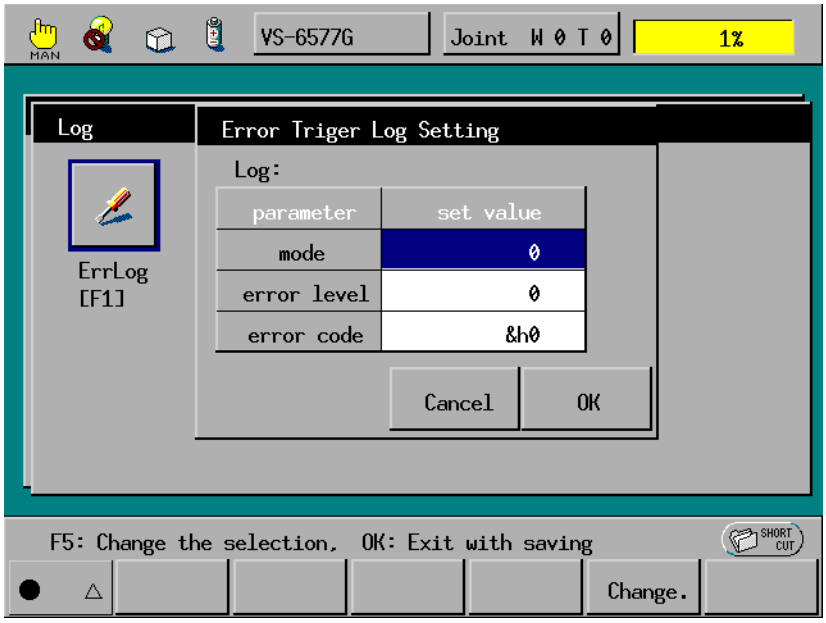

Mode = 0 : This setting disables all error triggers.

Mode = 1 : An occurrence of an error of the specified error level or higher triggers logging.

Mode = 2 : An occurrence of an error of the specified error code triggers logging.

Configuring with mini-pendant

Press Log|ErrTrig, then specify the error logging mode.

Note

Error trigger logs retain the various recorded logs when a specified error occurs. Log data retained (not updated) through STOPLOG or another command in log operation is saved in flash memory.

If the log is non-empty, a special symbol (○) appears on the first line of this dialog box.

8.2 Acquisition of log data

Log data retained in the controller can be retrieved by the following methods.

- Data transfer in WINCAPS III
  Log data checked in the robot controller is retrieved into WINCAPS III in the data transfer screen.

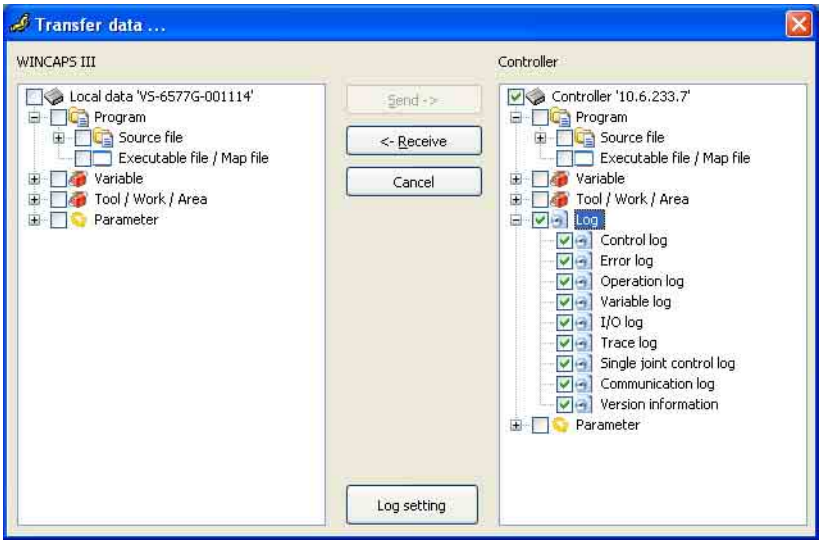

- Transfer using the WINCAPS III log screen
  Log data is received and displayed by pressing the Receive button in the log screens displayed by WINCAPS III. (Not for single servo data logs)

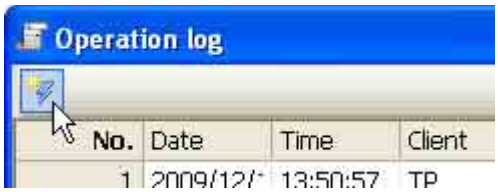

- Retrieval of log data using USB memory
  Log data can be retrieved from the controller to USB memory. DRAM or flash memory can be selected as the retrieval source for control logs. For further details, refer to the Operating Guide.

8.2.1 Log acquisition settings

Some logs contain multiple fields for saving log data. You can specify from which field you will acquire log data with WINCAPS III.

Under default (standard) settings the error and operation logs are acquired from SRAM, and other logs from DRAM.

Selecting the log data on the data transfer screen makes the Select log data source button active.

8.3 Detailed description of log types

8.3.1 Error log

Records errors occurring in the controller. The most recent 1,000 errors are recorded. The data is saved in SRAM.

The error log is regularly updated. If you wish to secure particular log data, use error trigger logs or suchlike.

Two or more types of errors may occur simultaneously, but what appears as an error message is only one of those errors. Checking the error log to see other errors that occurred simultaneously or checking the error log in conjunction with the operation log helps in pursuing the cause of errors.

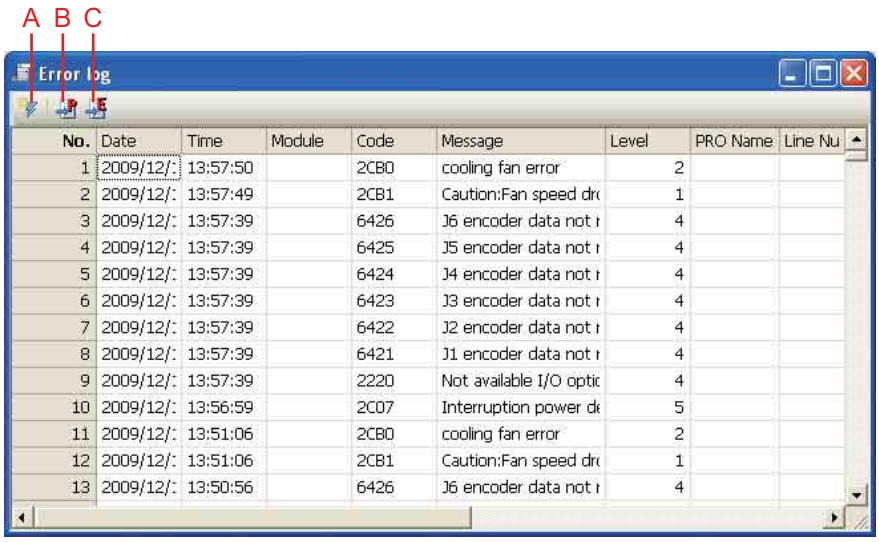
A B C
Error log
No. Date Time Module Code Message Level PRO Name Line Nu
1 2009/12/: 13:57:50 2CB0 cooling fan error 2
2 2009/12/: 13:57:49 2CB1 Caution:Fan speed dr 1
3 2009/12/: 13:57:39 6426 J6 encoder data not r 4
4 2009/12/: 13:57:39 6425 J5 encoder data not r 4
5 2009/12/: 13:57:39 6424 J4 encoder data not r 4
6 2009/12/: 13:57:39 6423 J3 encoder data not r 4
7 2009/12/: 13:57:39 6422 J2 encoder data not r 4
8 2009/12/: 13:57:39 6421 J1 encoder data not r 4
9 2009/12/: 13:57:39 2220 Not available I/O optic 4
10 2009/12/: 13:56:59 2C07 Interruption power dr 5
11 2009/12/: 13:51:06 2CB0 cooling fan error 2
12 2009/12/: 13:51:06 2CB1 Caution:Fan speed dr 1
13 2009/12/: 13:50:56 6426 J6 encoder data not r 4

A: Receive button

This receives error log data from the controller and displays it.

B: Jump to source code button

This displays the source code for the error.

C: Error information button

This displays explanations and recovery methods for the errors.

The following items are recorded for the data.

- Date / time
- Code
  Error code
- Level
  Error level
- PRO name, line number
  Name of the program and the line number in which error occurred.
- Time since controller boot

8.3.2 Operation log

This is a record of controller operations. The most recent 1,000 items are recorded. The data is saved in SRAM. The operation log is regularly updated. If you wish to secure particular log data, use error trigger logs or suchlike.

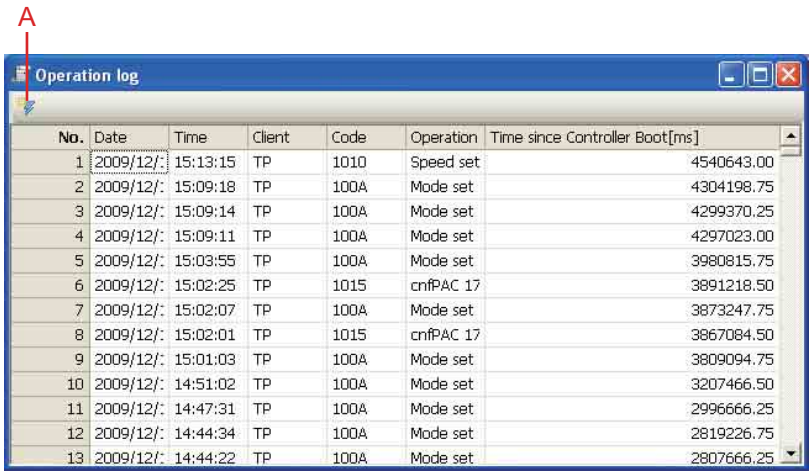

No.	Date	Time	Client	Code	Operation	Time since Controller Boot[ms]
1	2009/12/:	15:13:15	TP	1010	Speed set	4540643.00
2	2009/12/:	15:09:18	TP	100A	Mode set	4304198.75
3	2009/12/:	15:09:14	TP	100A	Mode set	4299370.25
4	2009/12/:	15:09:11	TP	100A	Mode set	4297023.00
5	2009/12/:	15:03:55	TP	100A	Mode set	3980815.75
6	2009/12/:	15:02:25	TP	1015	cnfPAC 17	3891218.50
7	2009/12/:	15:02:07	TP	100A	Mode set	3873247.75
8	2009/12/:	15:02:01	TP	1015	cnfPAC 17	3867084.50
9	2009/12/:	15:01:03	TP	100A	Mode set	3809094.75
10	2009/12/:	14:51:02	TP	100A	Mode set	3207466.50
11	2009/12/:	14:47:31	TP	100A	Mode set	2996666.25
12	2009/12/:	14:44:34	TP	100A	Mode set	2819226.75
13	2009/12/:	14:44:22	TP	100A	Mode set	2807666.25

A: Receive button

This receives operation log data from the controller and displays it.

The following items are recorded for the data.

- Date / time
- Client
  The device that was operated is recorded. (TP: Teach pendant. PC: WINCAPS III, etc. PC. I/O: I/O. SYS:System)
- Operation
- Time since controller boot

8.3.3 Control log

A record of the robot's control, including movement of axes, current values, load ratios, etc.

This is useful in the following cases.

- Checking robot behavior within a specified range.
- Checking the age deterioration of the robot.
- Approximating the minimal load on the motor by predicting load ratios.

The control log recording time can be set by specifying the recording interval and number of records.

Recording can be made manually from the teach pendant or WINCAPS III or through program operations and error triggers.

The recording timing of the program is controlled using the STARTLOG, STOPLOG and CLEARLOG commands. For further details, refer to Programming Manual 1.

Grid display

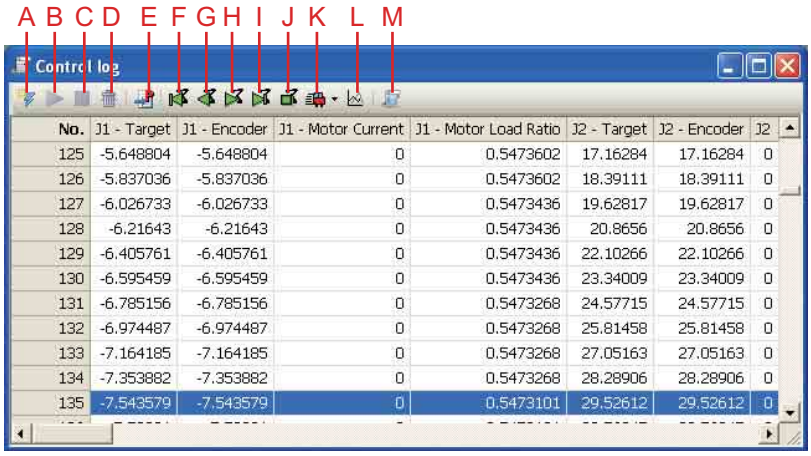

Graph display

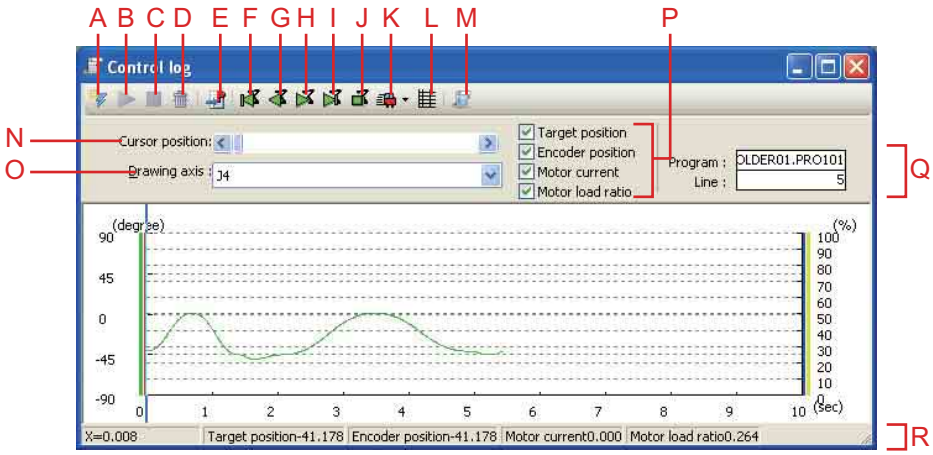

A: Receive button

This receives control log data from the robot controller and displays it.

B: Start control log button

This starts or resumes the control log. STARTLOG is executed.

C: Stop control log button

This stops the control log. STOPLOG is executed.

D: Clear control log button

This button clears the currently retained control log. CLEARLOG is executed.

E: Jump to source code button

This displays the source code for the selected log program.

F: Reverse step in button

This reproduction button plays back the control log, producing step-by-step robot motion in the reverse direction in the Arm 3D view.

G: Reverse playback button

This reproduction button plays back the control log, producing robot motion in the reverse direction in the Arm 3D view.

H: Playback motion button

This reproduction button plays back the control log, producing robot motion in the Arm 3D view.

I: Step in button

This reproduction button plays back the control log, producing step-by-step robot motion in the Arm 3D view.

J: Stop control button

This button stops reproduction using the control log.

K: Speed control

This controls the robot operating reproduction speed in the Arm 3D view subject to testing priority. There are two choices.

- Priority to collision detection
  Robot movement is reproduced for each log data line. For collision detection you can prioritize collision determination with slowed down reproduction.
- Priority to actual running times
  Reproduction of operation matches the actual speed. (The collision may not be accurately determined.)

L: Graph display / grid display button

Switches the display style (graph/grid) for the control log data.

M: Control log analysis

The analysis results (predictive load ratio, maximum load ratio, predictive regenerative resistance load ratio) are displayed in the output window.

- Predictive load ratio
  Displays the predictive load ratio for a series of operations in the log range of processes. If the predictive load ratio exceeds 80%, an overload error is likely to occur.
- Maximum load ratio
  Displays the maximum load ratio in the log. At over 100% an overload error will occur.
- Predictive regenerative resistance load ratio
  The predictive load ratio for regenerative resistance is displayed for relevant models.

N: Cursor position

Moves the position of the cursor in the graph.

O: Drawing axis

Selects a data axis displayed in the graph.

P: Select display item

The checked items are displayed in the graph.

Q: Program / Line

Displays the program name and source code line at the cursor position.

R: Status

Displays the cursor position coordinates and the cursor position values of log data displayed in the graph.

The following items are recorded for the log data.

- Axis command values
  Axis angles commanded by the controller in the specified recording interval
- Axis encoder value
  Current axis angle values (actual values)
- Axis current values
  Current values in the motors of the axes
- Axis load ratios
  Load ratios in the axes
- Regenerative resistance load ratio
  Regenerative resistance load for relevant models
- Program name and Line number
- Time since controller boot

8.3.3.1 Secure control log data

Control logs are recorded in DRAM where data is lost when power is turned off, but can manually be copied to flash memory where it is retained after switchoff.

Manual copying proceeds by F2 (Arm)|F6 (Auxiliary function)|F11 (Control log)|F7 (Save log) in the teach pendant.

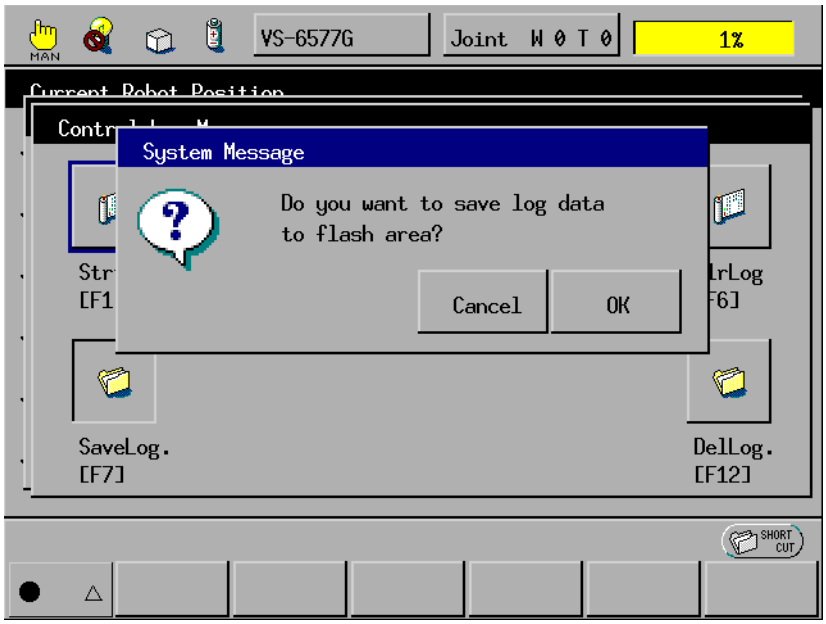

8.3.3.2 Setting the control log recording interval and number

You can configure the sampling interval and number of logs (control log mode) for recording control logs in the ring buffer.

The number of control logs recorded (control log mode) is set in 1-24 units of 1,250 (1,250 - 30,000).

The sampling interval can be set at 8/16/24/32 ms.

The default setting records 10 seconds of log in the ring buffer (control log number: 1,250; sampling interval: 8 ms).

Configuring with teach pendant

Press F2 (Arm)|F6 (Auxiliary function)|F7 (Usage conditions) and enter values for No.22 and No.23.

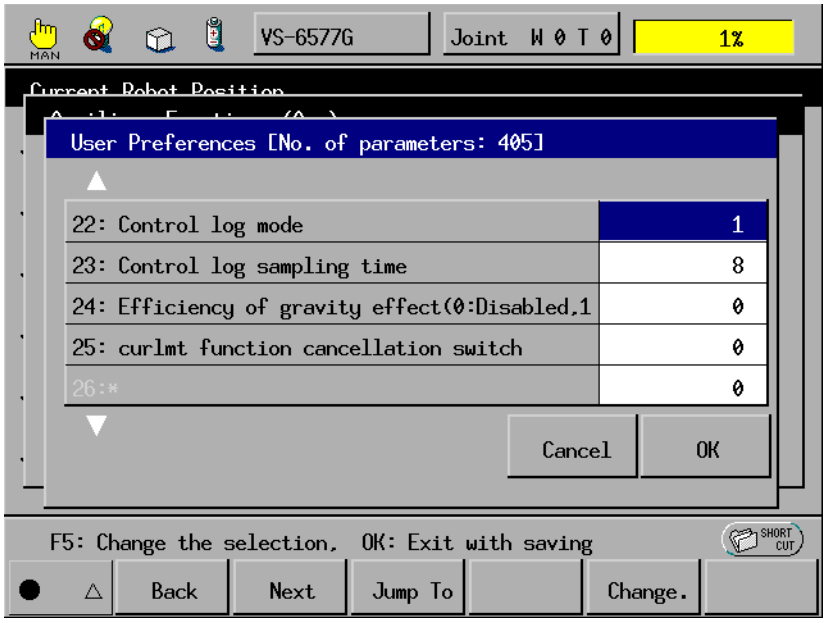

WINCAPS III settings

Choose Debug|Controller Settings / Control log acquisition times in online (debugging) mode.

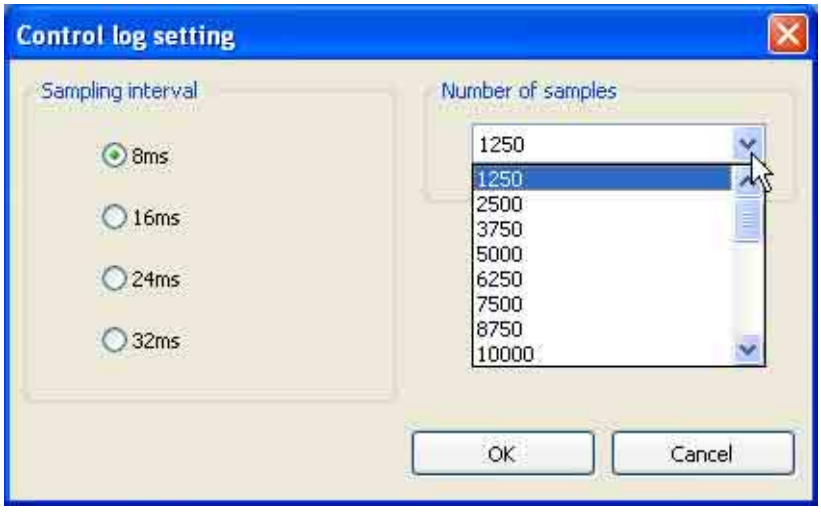

Note

The most recent 1,250 error trigger logs are secured regardless of the number setting.

8.3.4 Trace logging (single / multi)

Trace logging records the program execution flow and timing.

There are two types: single trace logs for recording single program flows and trace logging (multi) for recording multiple program flows.

8.3.4.1 Trace log recording operations

There is no distinction in these operations between single and multi trace logging. Using these operations will record single trace logs and trace logging (multi) for all active programs.

The following methods are used to operate trace logging.

- Manual operation (buttons)
  Using the buttons on the top of the trace log window.

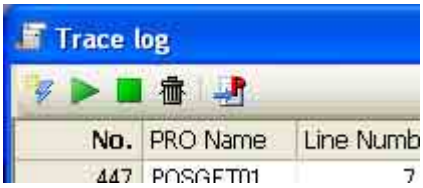

- Setting recording ranges in the program
  Display the program for recording in online mode (monitoring or debugging), select the command for recording and set the start and end lines.

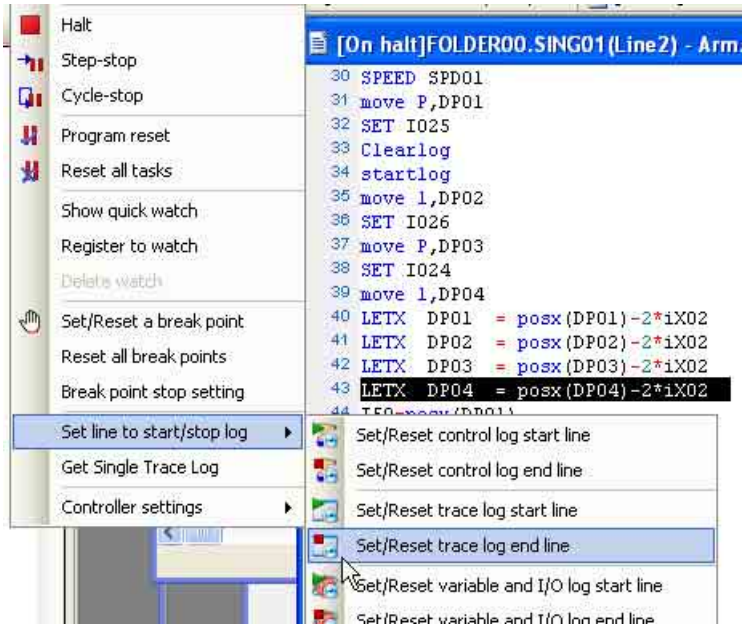

- Command statements
  The following three commands are used for trace logging. For further details on commands, please refer to the Programming Manual.
  STARTTRACELOG: Declares the start of trace log recording.
  STOPTRACELOG: Logs the currently recorded log data.
  CLEARTRACELOG: Clears the trace log data.

8.3.4.2 Single-trace Log

This records the command flow for a single program.

The time required to execute each command is recorded, giving useful data for shortening cycle time and optimizing operations.

Receive log data by specifying a program.

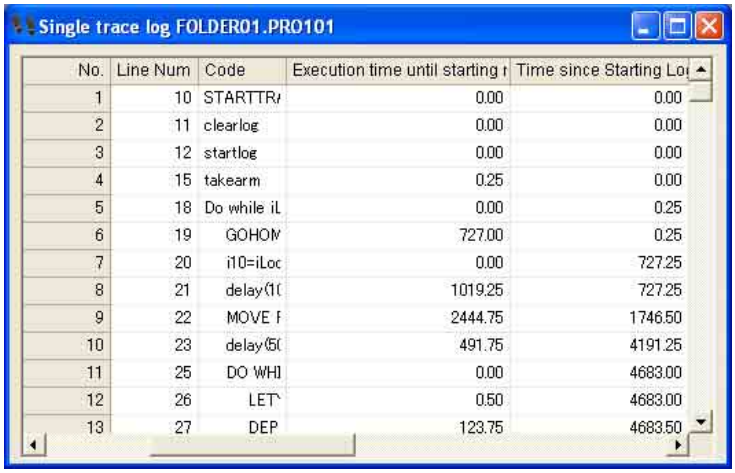

No.	Line Num	Code	Execution time until starting r	Time since Starting Lo
1	10	STARTTR/	0.00	0.00
2	11	clearlog	0.00	0.00
3	12	startlog	0.00	0.00
4	15	takearm	0.25	0.00
5	18	Do while iL	0.00	0.25
6	19	GOHOM	727.00	0.25
7	20	i10=iLoc	0.00	727.25
8	21	delay(1(	1019.25	727.25
9	22	MOVE F	2444.75	1746.50
10	23	delay(5(	491.75	4191.25
11	25	DO WHI	0.00	4683.00
12	26	LET`	0.50	4683.00
13	27	DEP	123.75	4683.50

The data recorded is as follows.

- PRO name, line number
- Code
  Program code
- Execution time until starting next [ms]
- Time since log record start [ms]
- Time since controller boot [ms]

8.3.4.3 Trace logging (multi)

Trace logging (multi) records the command line sequence executed for multiple programs running simultaneously.

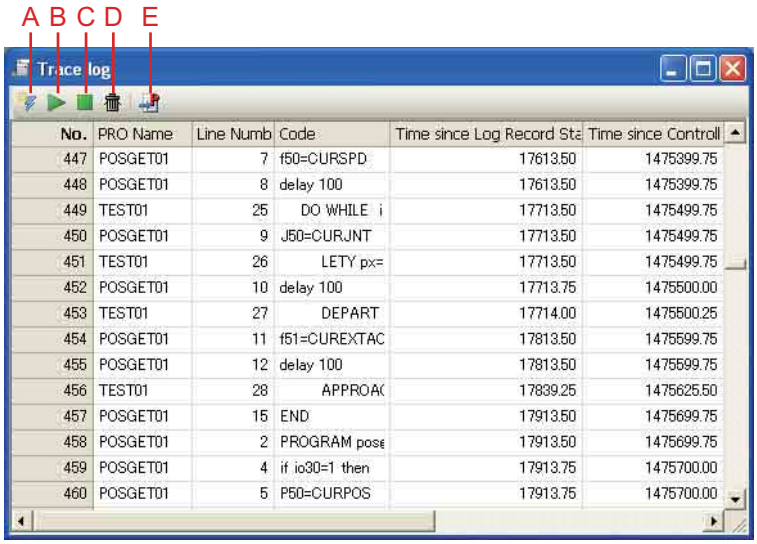

A: Receive button

Trace log (multi) data is received from the controller.

B: Start trace log button

This begins trace logging.

C: Stop trace log button

Logs the currently recorded log data.

D: Clear trace log button

Clears the trace log data.

E: Jump to source code button

This displays the program code for the selected log.

The data recorded is as follows.

- PRO name, line number
- Code
  Program code
- Time since log record start [ms]
- Time since controller boot [ms]

8.3.5 Variable log

This records changes (overwriting) of variables.

Variables registered in Watch are recorded. You can set whether to record variable log in the Log column of the WINCAPS III Watch screen.

Recording of variable logs can be operated through setting the log recording range in the WINCAPS III program screen.

Command statements can also be used.

The following three commands are used for these operations.

- STARTVARLOG
- STOPVARLOG
- CLEARVARLOG

Note

For further details on commands, please refer to the Programming Manual.

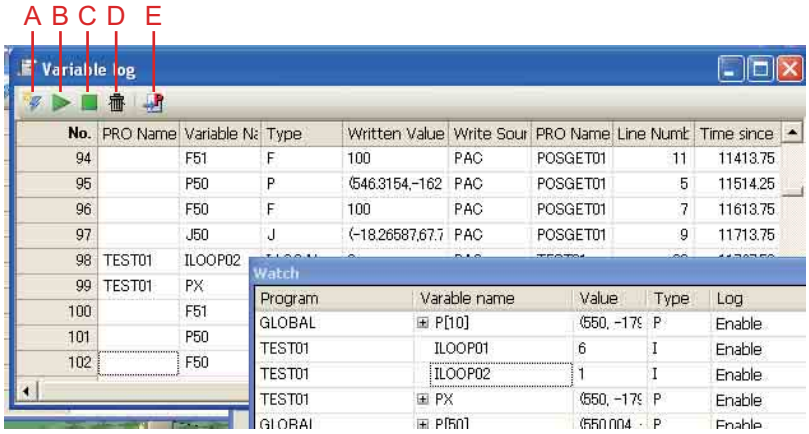
A B C D E
Variable log
No. PRO Name Variable Na Type Written Value Write Sour PRO Name Line Numb Time since
94 F51 F 100 PAC POSGET01 11 11413.75
95 P50 P (546.3154,-162 PAC POSGET01 5 11514.25
96 F50 F 100 PAC POSGET01 7 11613.75
97 J50 J (-18.26587,67.7 PAC POSGET01 9 11713.75
98 TEST01 ILOOP02
99 TEST01 PX
100 F51
101 P50
102 F50
Watch
Program Varable name Value Type Log
GLOBAL P[10] (550, -179 P Enable
TEST01 ILOOP01 6 I Enable
TEST01 ILOOP02 1 I Enable
TEST01 PX (550, -179 P Enable

A: Receive button

This receives variable log data.

B: Start variable log button

This begins logging the variables.

C: Stop variable log button

This suspends logging.

D: Clear variable log button

This clears saved variable log data.

E: Jump to source code button

This displays the relevant program code for the selected log.

The data recorded in the log is as follows.

- PRO name, variable name
  The name of the program defining the variables and their names
- Type
  The types of variables
- Written values
- Writing source
  The device which altered the variables

- PRO name, line number
  The name of the altered program and line number
- Time since log record start [ms]
- Time since controller boot [ms]

8.3.6 I/O log

This records the I/O status at the start of logging and subsequent I/O changes.

It is mostly used for checking the I/O status / safety circuits / drive preparations when activating equipment.

Operating the recording timing can be performed manually (using WINCAPS III start buttons, etc.) and records taken from controller power on.

Note

Only I/O with checks in the Log column of the WINCAPS III I/O screen are logged.

Log acquisition in programs is not possible.

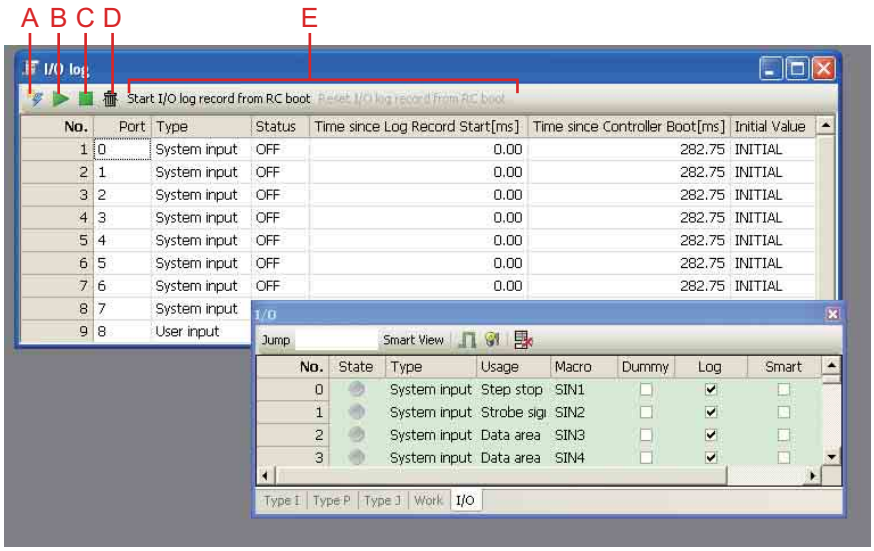
A B C D
E
I/O log
Start I/O log record from RC boot
Reset I/O log record from RC boot
No. Port Type Status Time since Log Record Start[ms] Time since Controller Boot[ms] Initial Value
1 0 System input OFF 0.00 282.75 INITIAL
2 1 System input OFF 0.00 282.75 INITIAL
3 2 System input OFF 0.00 282.75 INITIAL
4 3 System input OFF 0.00 282.75 INITIAL
5 4 System input OFF 0.00 282.75 INITIAL
6 5 System input OFF 0.00 282.75 INITIAL
7 6 System input OFF 0.00 282.75 INITIAL
8 7 System input
9 8 User input
I/O
Jump
Smart View
No. State Type Usage Macro Dummy Log Smart
0 System input Step stop SIN1
1 System input Strobe sig SIN2
2 System input Data area SIN3
3 System input Data area SIN4
Type I Type P Type J Work I/O

A: Receive button

This receives I/O log data.

B: Start I/O log button

This begins the I/O log.

C: Stop I/O log button

This suspends logging.

D: Clear I/O log button

This clears saved I/O log data.

E: Start / stop I/O logging from power on button

This starts or stops I/O logging from power on.

The data recorded in the log is as follows.

- Port
  I/O port number.
- Type
  Exclusive input, universal output, etc.

- Status
  Altered status
- Time since log record start
- Time since controller boot
- Initial value
  INITIAL is entered in the value when logging begins.

8.3.7 Joint servo log for particular joint

More detailed recording of motor control.

The recording interval can be set from 1-8 ms.

The following data is logged.

- Motor speed command value [r/min]
- Motor speed current (actual) value [r/min]
- Motor torque command value (less torque offset) [% of rating]
- Motor angle difference (motor angle command value - actual motor angle) [Pulse]
- Motor current absolute value (the maximum detected motor 3-phase absolute current value)

The recording range can be specified with the program.

The following programs stored in the program bank are used. For further details, refer to Programming Manual II.

- SetMonitorCond
- StartSrvMonitor
- SotpSrvMonitor
- ClearSrvMonitor

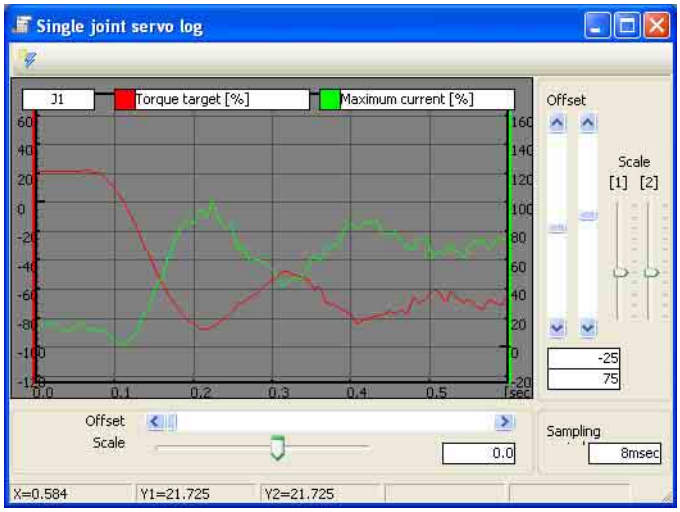

Chapter 9 Vision Manager

9.1 Overview

The Vision Manager is for writing robot vision programs in the PAC programming language. Working interactively in the WINCAPS III environment, the programmer defines processing windows, writes search models, and creates lookup tables.

WINCAPS III saves image data in .bmp format and search models in a special data format.

9.1.1 Screen descriptions

Vision monitor window

This window displays the image from a camera connected to the robot unit. Choose View|Vision Monitor to display it in the Program view area.

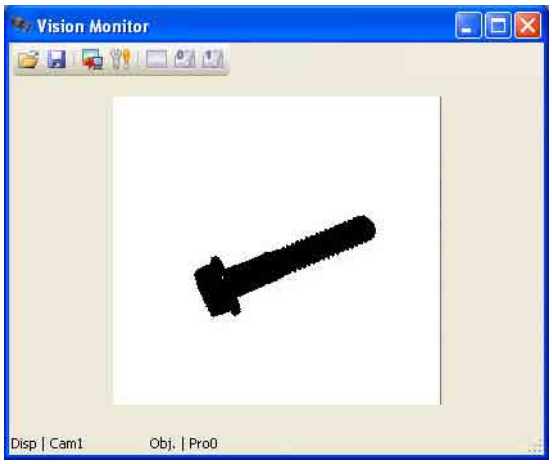

Vision tool window

This window is for configuring the Vision Manager. Choose View|Vision Tool to display it in the Docking view area.

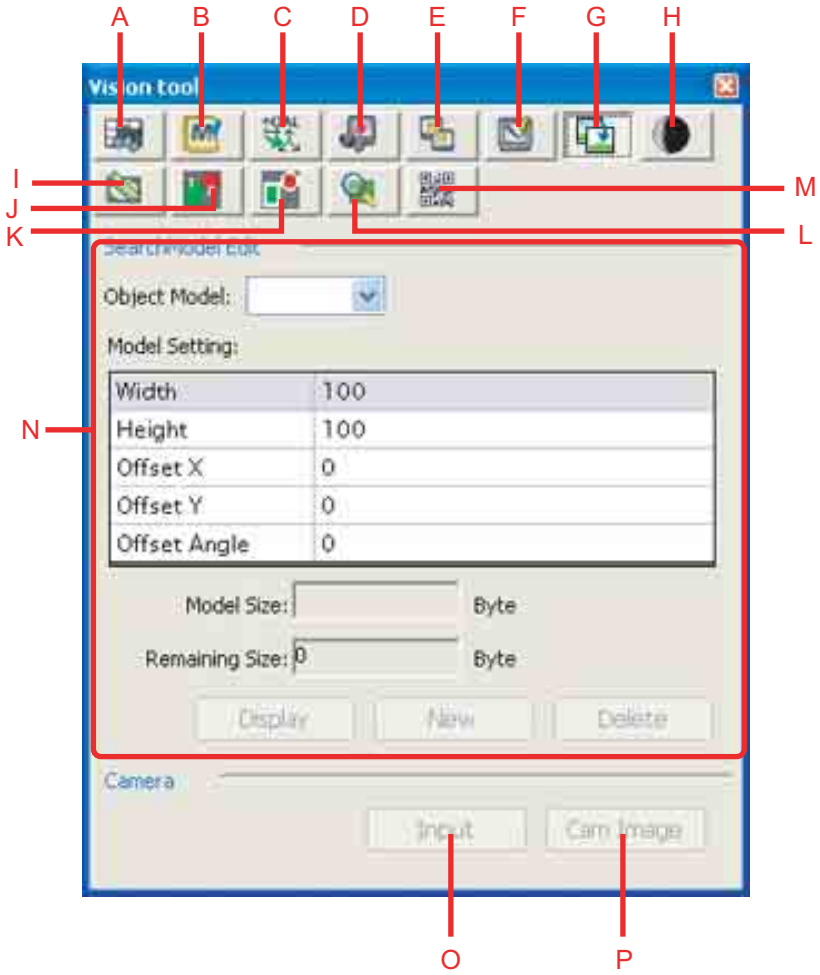

The following buttons switch the configuration area of this window.

A: Lookup table

This button is for specifying lookup tables.

B: Edit macro name

This button is for editing window and search model macro names.

C: Calibrate

This button is for measuring coordinate conversion coefficients.

D: Camera input

This button is for copying a camera image to an image processing screen.

E: Screen display

This button switches the Vision monitor window.

F: Edit window

This button enables window editing.

G: Edit search model

This button enables search model editing.

H: Register digitization

This button is for determining the digitization thresholds for image analysis.

I: Area/Center of gravity/Principal axis

This window is for determining three object features: area, center of gravity, and principal axis.

J: Labeling

This button is for finding and labeling objects in the window.

K: Edge

This button is for detecting edges.

L: Model search

This button is for pattern matching using a search model.

M: Scan code

This button is for reading in a QR Code symbol.

N: Configuration area

This button is for displaying the settings screen for the selected function.

For screen descriptions, refer to 9.2 "Configuring Vision Manager" (P. 141).

O: Capture

This button copies the camera image to the processing screen specified on the Camera input settings screen and displays that data in the Vision monitor window.

P: Camera image

This button switches the Vision monitor window to the camera number specified with the Camera input settings screen.

9.2 Configuring Vision Manager

9.2.1 Configuring lookup tables

Lookup tables specify the camera's input characteristics as well as the display characteristics for the camera image and processing screens. Tables 0 to 4 are reserved for system use; 5 to 15 are user modifiable.

Lookup table screen

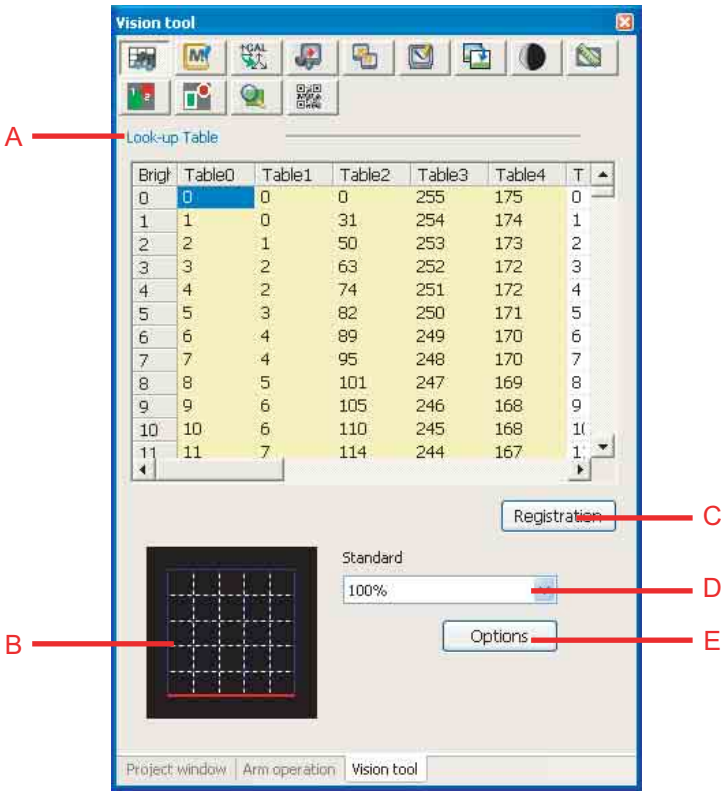

A: Lookup table

This area contains the tables specifying characteristics. (The user-modifiable ones start at number 5.)

B: Graph

This graphs the characteristics for the currently selected column in the Lookup table area.

C: Save button

This button saves search model modifications.

D: Standard table

This field is for choosing a standard table from a pull-down list.

E: Apply

This copies the specified standard table to the selected column in the Lookup table area.

1) Select a column in the Lookup table area.
2) Choose a standard table from the pull-down list.
3) Press the Apply button

9.2.2 Editing a macro name

This is for editing macro names and application for windows and search models.

Defining macros allows programs to use substitute the macro name for its content.

A macro name must be in single-byte characters. Using other characters renders that portion of the macro definition file unavailable to programs.

Edit macros screen

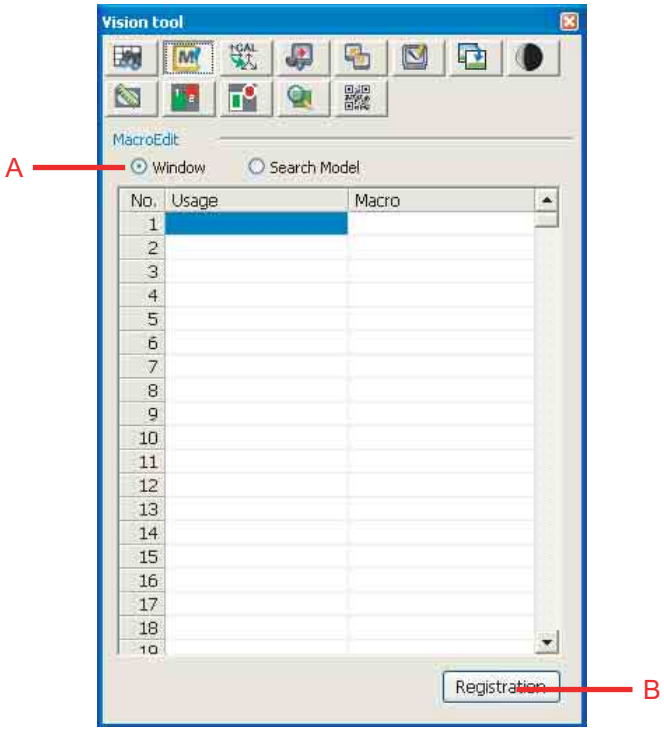

A: Macro scope

Specify the macro's scope

B: Save

This button saves modifications to the macro.

Operating procedure

1. **Specify the macro's scope with a radio button: Window or Search model.**
2. **Double-click a cell to highlight its contents for editing. An empty cell has only an cursor.**
3. **Enter the application or macro name.**
4. **Press the Register button.**

Note

A macro name must be in single-byte characters.

9.2.3 Calibrating

The Calibration settings screen manages thirty two sets of calibration data numbered 0 to 31. A calibration operation calculates conversion coefficients by comparing monitor coordinates with their robot counterparts for three image features and saves both the source data and the coefficients under the specified number.

Calibration settings screen

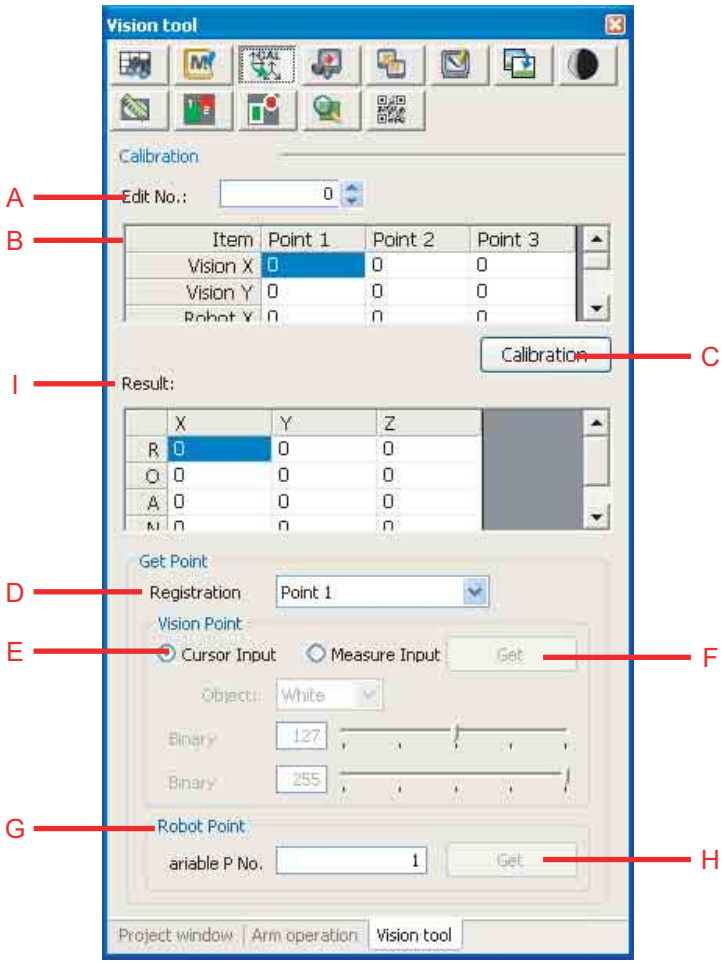

A: Number to edit

This field specifies the set of calibration data to update.

B: Calibration data table

This table specifies the Vision monitor and robot coordinates for the calibration operation. The operation requires coordinate data for three separate points, numbered 1 to 3.

C: Calibrate

This button initiates calibration.

D: Point to edit

This field specifies the point to edit.

E: Vision window points

These radio buttons specify the method for entering Vision monitor coordinates.

F: Read

This button is for specifying Vision monitor coordinates using the selected input method.

G: P variable number

This field is for specifying, by number, the variable of type P containing the robot coordinates.

H: Read

This button copies the robot coordinates from the specified P variable.

I: Results

This area displays the results of the calibration operation.

9.2.3.1 Calibration procedure

The following is the calibration procedure.

Operating procedure

1. **Select three distinct points.**
2. **Specify the dataset number.**
3. **Enter the Vision monitor coordinates.**

   For further details, refer to 9.2.3.2 "Entering the Vision monitor coordinates" (P. 145).
4. **Enter the robot coordinates.**

   For further details, refer to 9.2.3.3 "Specifying robot coordinates" (P. 147).
5. **Calculate the coordinate conversion coefficients.**

   For further details, refer to 9.2.3.4 "Calibrating" (P. 147).

9.2.3.2 Entering the Vision monitor coordinates

There are the following three ways to enter the Vision monitor coordinates.

- Direct entry: Directly entering numerical values
- Cursor input: Marking the corresponding point in the Vision monitor window with the cursor
- Measurement input: Finding the center of gravity with image analysis

The following are the procedures.

(1) Direct entry

Double-click the x- or y-coordinate cell in the Vision monitor area of the calibration data table and enter a numerical value.

(2) Cursor input

Indicate the corresponding point in the Vision monitor window with the crosshair cursor.

Operating procedure

1. **Display an image in the Vision monitor window.**

2. **Specify the point to edit.**

3. **Select the Cursor input radio button to display the crosshair cursor in the Vision monitor window.**

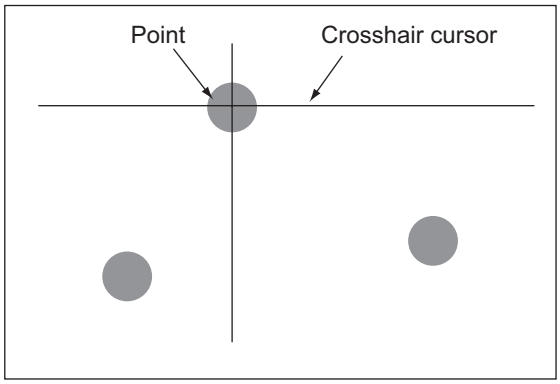

4. **Move the crosshair cursor to the target coordinates with dragging or with arrow keys.**

Moving crosshair cursor with keyboard

←, →, ↑ and ↓ keys: These four arrow keys move the crosshair cursor in the corresponding direction.

5. **Press the Read button to read in the cursor coordinates.**

(3) Measurement input

Find the center of gravity with image analysis and enter the results as the coordinates.

Operating procedure

1. **Display an image in the Vision monitor window.**
2. **Specify the point to edit.**
3. **Choose the Measurement input radio button to display a selection window in the Vision monitor window**
4. **Move the cursor to the target coordinates with dragging or with arrow keys.**

   Moving window with keyboard

   ←, →, ↑ and ↓ keys: These four arrow keys move the window in the corresponding direction.

   W and S keys: These keys widen and shrink the window, respectively.

   H and L keys: These keys make the window higher and lower, respectively.
5. **Press the Measure button to display the center of gravity.**

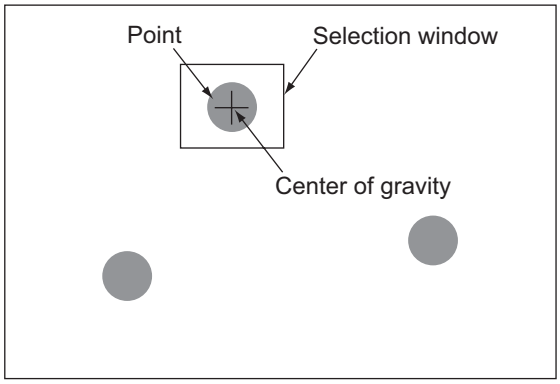

6. **Press the Read button to read in the coordinates.**

9.2.3.3 Specifying robot coordinates

There are the following two ways to enter robot coordinates.

- Direct entry: Directly entering numerical values
- Copying variable: Copying coordinates from a robot P variable

The following are the procedures.

Note

Make sure that the Vision monitor coordinates and the robot ones refer to the same point.

(1) Direct entry

Double-click the x-, y-, or z-coordinate cell in the Robot area of the calibration data table and enter a numerical value.

(2) Copying variable

This method copies robot coordinates from the specified P variable.

Operating procedure

1. **Specify the point to edit.**
2. **Move to the P variable field and enter the number for the robot coordinates.**
3. **Press the Read button to read in the coordinates.**

9.2.3.4 Calibrating

A calibration operation calculates conversion coefficients by comparing monitor coordinates with their robot counterparts for three image features. Although WINCAPS III must send calibration data to the robot controller, the robot controller stores only the conversion coefficients.

The conversion library converts robot coordinates using these stored coefficients. User programs can also use it to convert Vision monitor coordinates into robot ones.

Operating procedure

1. **Choose the dataset number for the calibration operation.**
2. **Press the Calibrate button to display a Results window.**

Note

- If an error message indicates problems with coordinate data, double-check the data for the three features.
- Adjust the coordinates until pressing the button successfully yields valid coefficients.

9.2.4 Configuring camera input

The following is the procedure for copying the camera image to an image processing screen.

The following screen controls data transfers from the camera to an image processing screen.

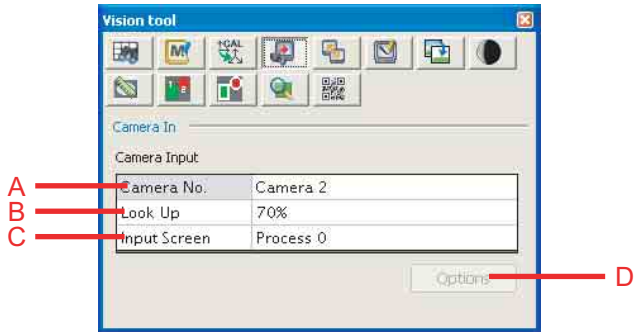

A: Camera number

This field specifies the image source.

B: Lookup

This field specifies the lookup table for adjusting the data.

C: Input

This field specifies the processing screen to receive the camera image.

D: Apply

This button copies the camera image to an image processing screen.

Note

What is a pixel?

The µVision board processes an image as an array of dots called picture elements or pixels. For storage, it handles images up to 512 pixels wide and 480 pixels tall; for drawing, up to 624 by 480.

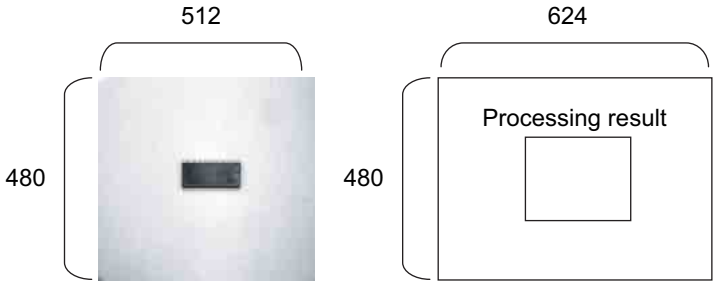

(Image processing screen) (Draw screen)

What is brightness?

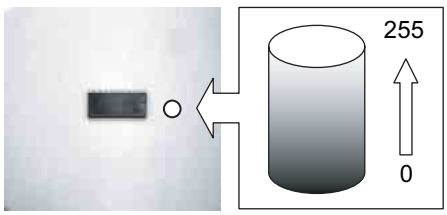

(Image processing screen)

Each pixel has a brightness, one of 256 numerical values between 0 and 255. The dark end of this scale is 0; the bright end, 255.

9.2.4.1 Reading in an image

Operating procedure

1. **Specify the source camera by number.**
2. **Specify the lookup table for adjusting the image.**
3. **Specify the Input screen.**
4. **Press the Apply button to copy the camera image to an image processing screen.**

9.2.5 Switching display screens

The Vision monitor window switches between three types of images: camera, processing, and draw.

Screen display settings screen

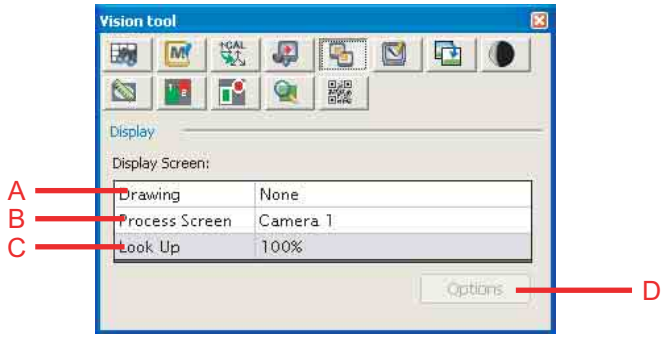

A: Draw screen

This field specifies the draw image to display.

B: Camera & processing

This field specifies the camera image or processing image to display.

C: Lookup

This field specifies the lookup table for adjusting the image.

D: Apply

This button switches the Vision monitor window to the specified image.

⚠Caution

Image analysis automatically changes the Draw screen setting on this settings screen to Draw screen 1 to display its results there. If the current setting is Draw screen 0, however, the setting changes to Draw screen 0+1.

9.2.5.1 Switching the Vision monitor window display

Operating procedure

1. **Select the Draw screen field and specify the draw image to display.**
2. **Select the Camera & processing screen field.**
3. **Specify the lookup table for adjusting the image.**
4. **Press the Apply button to copy the camera image to an image processing screen.**

9.2.6 Editing a window

To edit robot controller window settings, WINCAPS III must first read in their current values.

Edit window settings screen

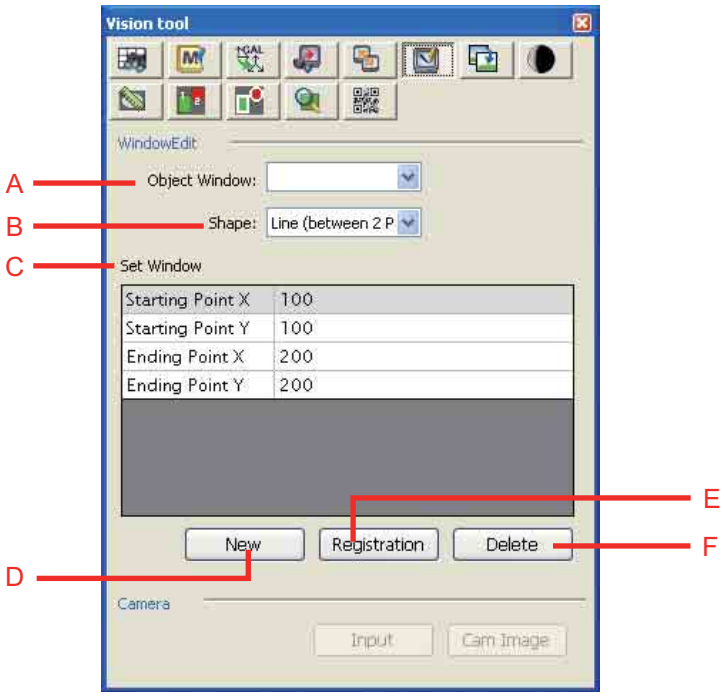

A: Target window

This field specifies the window to edit.

B: Shape

This field specifies the window shape.

C: Window settings

This area lists window settings.

D: New

Creates a new window.

E: Save

This button saves window modifications.

F: Delete

This button deletes the selected window.

Note

What is a window?



Here a window means the portion of the image that the μVision board is to process. The board remembers the sizes for each window.

There are two ways to edit windows: with Vision Manager and with user programs. The board stores window specifications supplied by user programs in volatile memory, so these disappear when the power is removed.

9.2.6.1 Creating a new search model

Operating procedure

1. **Enter a number for the window in the Target window field.**

2. **Choose a shape.**

3. **Adjust the window size**

Moving the window

Drag the window outline to move the window.

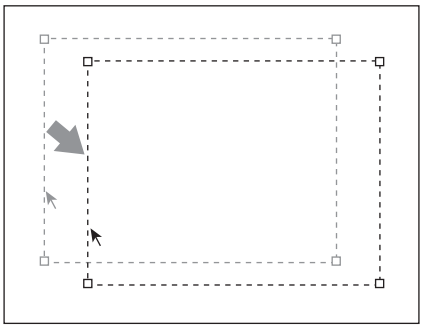

Changing the window size

Drag a window corner to resize the window.

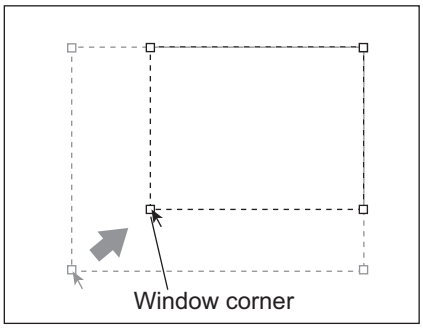

Note

The Window settings dialog box also permits direct, numerical specification of window position and size.

4. **Press the Register button.**

Note

Projection window

Rectangular and sector window shapes add an edge detection direction setting.

This parameter specifies the scan direction for edge detection. Set this to 2 (none) if edge detection is not used. This is the default setting when a window is first created and after a shape change.

Change this setting to match the measurement method.

- Rectangular window

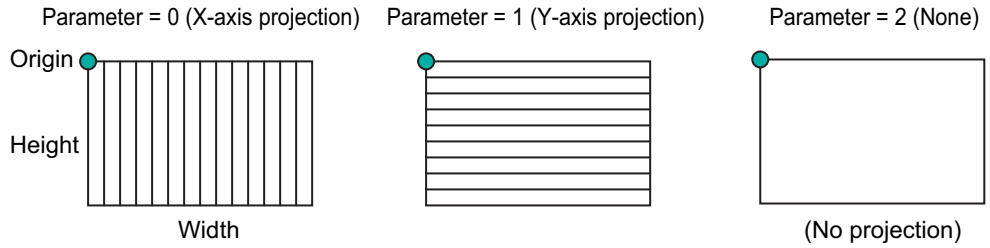

- Sector window

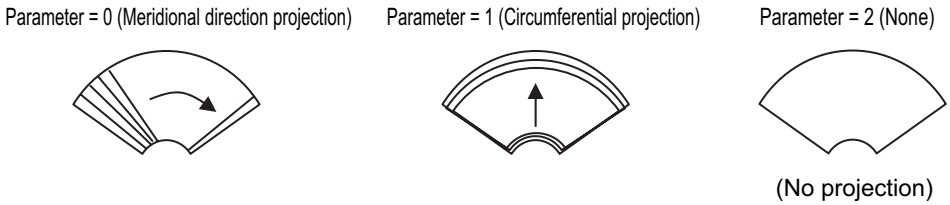
Parameter = 0 (Meridional direction projection)
Parameter = 1 (Circumferential projection)
Parameter = 2 (None)
(No projection)

9.2.6.2 Editing a window

The following is the procedure for editing a window.

Operating procedure

1. **Enter the window number in the Target window field to display the settings for the window specified on the Window settings screen and display the image in the Vision monitor window.**
2. **Adjust the window size.**
3. **Press the Register button.**

9.2.6.3 Deleting a window

Operating procedure

1. **Enter the number of the window in the Target window field. to display the settings for the window specified on the Window settings screen.**
2. **Press the Delete button.**

9.2.7 Editing a search model

To edit a robot controller search model, WINCAPS III must first read it in.

Search model settings screen

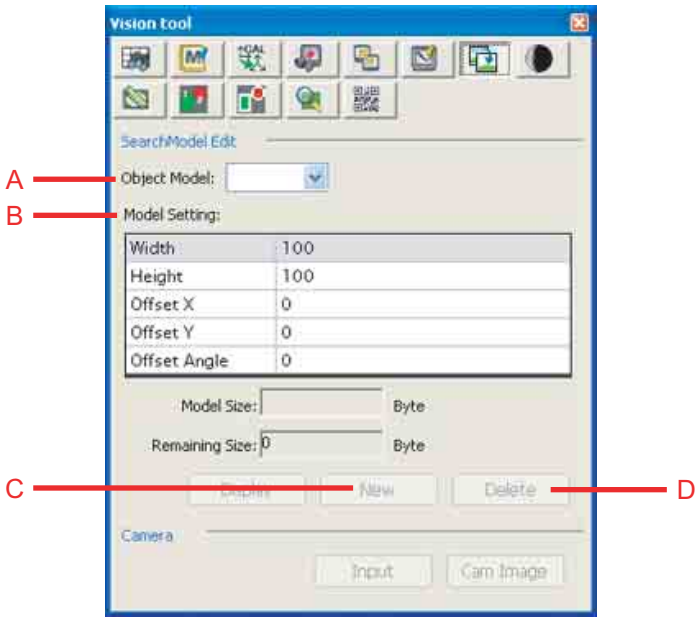

A: Target model

This field specifies the search model.

B: Model settings

This area displays information on the current search model for editing.

C: Save

This button saves search model modifications.

D: Delete

This button deletes the search model.

Note

The offset angle field is not available when the robot controller does not support angle measurements.

9.2.7.1 Creating a new search model

Operating procedure

1. Enter a number for the new search model in the Target field.

2. Adjust the search model shape and offsets.

Moving the window

Drag the window outline to move the window.

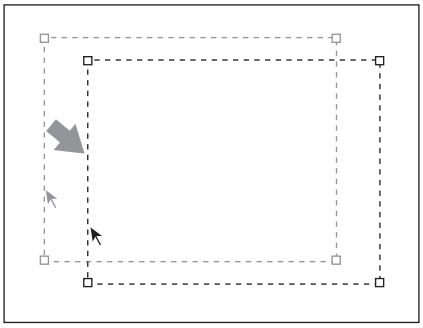

Changing the size

Drag a window corner to resize the window.

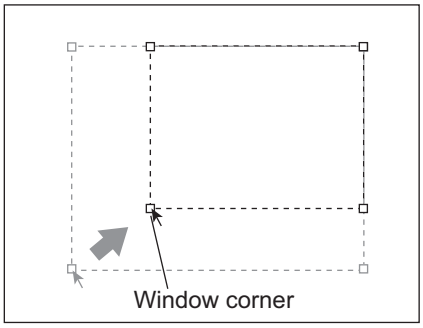

Changing offset

Drag the crosshairs to adjust an offset position.

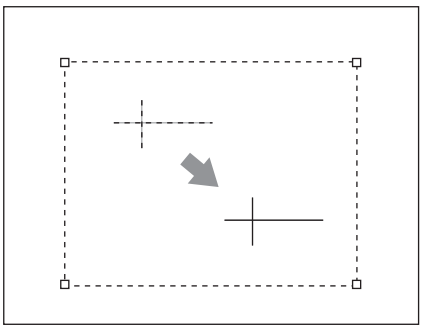

Changing the offset angle

Drag the long arm of the crosshairs to adjust the offset angle.

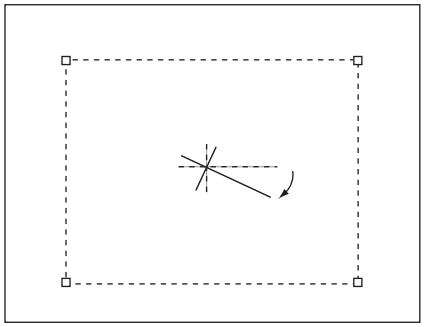

3. Press the Register button.

9.2.7.2 Modifying a search model

The following is the procedure for editing a search model.

Operating procedure

1. **Choose the search model to edit from the list box to display its data on the Model settings screen and display it in the Vision monitor window.**
2. **Adjust the search model shape and offsets.**
3. **Press the Register button.**

9.2.7.3 Deleting a search model

Operating procedure

1. **Choose the search model to edit from the list box to display its data on the Model settings screen.**
2. **Press the Delete button.**

9.2.8 Registering digitization

The following give the procedures for specifying or determining digitization thresholds.

The Register digitization settings screen offers four choices for determining the optimal thresholds: manual specification, calculation with mode method, discriminant analysis, and p-tile threshold calculation.

Radio buttons switch this screen between Histogram settings and Digitization settings.

Digitization/Histogram settings screen

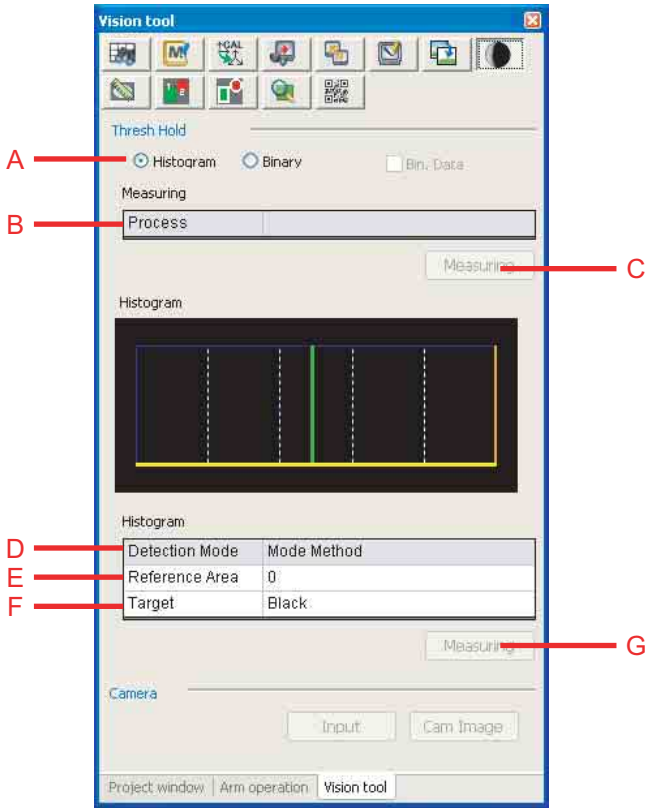

A: Histogram

This radio button displays the Histogram settings screen.

B: Processing window

This field specifies the processing window range.

C: Calculate histogram

This button displays the histogram.

D: Method

This field specifies the method for entering digitization thresholds.

E: Reference surface

This field specifies the reference area to use for the p-tile threshold calculation.

F: Target

This field specifies the target area to use for the p-tile threshold calculation.

G: Measure

This button is for specifying or determining the digitization thresholds for image analysis.

Digitization/Histogram settings screen

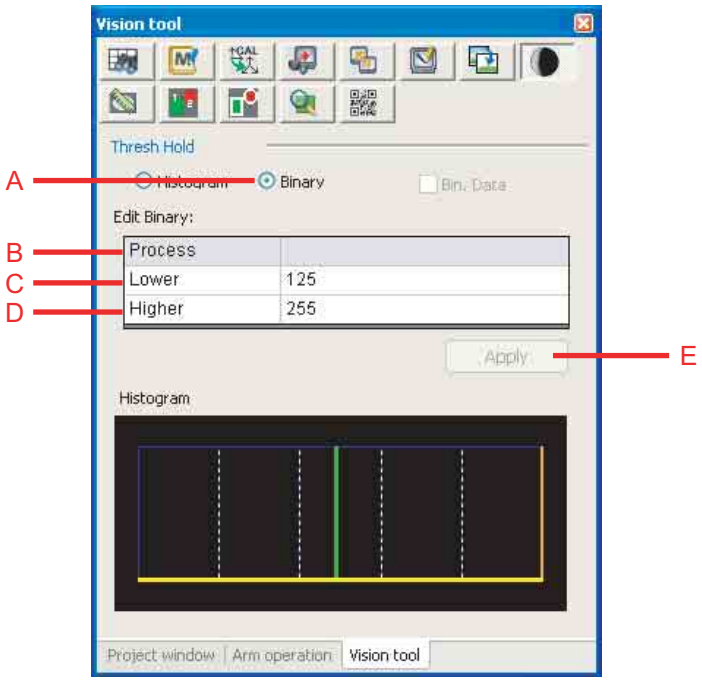

A: Digitization

This radio button displays the Digitization settings screen.

B: Processing window

This field specifies the processing window range.

C: Digitization lower boundary

D: Digitization upper threshold

These two fields display/specify the digitization thresholds for image analysis.

E: Apply

This button saves window modifications.

Note

What is digitization?

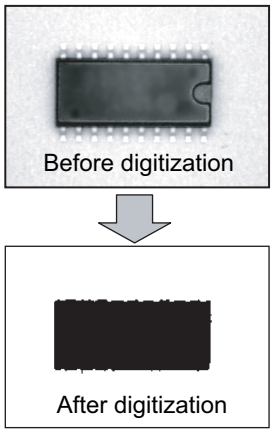

The DENSO μVision board accepts as camera input gray scale images with 256 possible values for each pixel brightness. Digitization uses brightness thresholds (boundaries) to make each pixel either pure white or jet black. There are two digitization thresholds. Pixels between the two thresholds become white (1); everything else, black (0).

What is a histogram?

This graph gives the brightness frequency distribution for pixels within the specified range inside the window showing the camera image. Displaying the brightness distribution as a graph (histogram) simplifies the task of selecting thresholds for digitizing the image. Histograms allow the DENSO μVision board to automatically determine digitization thresholds.

Figure 1

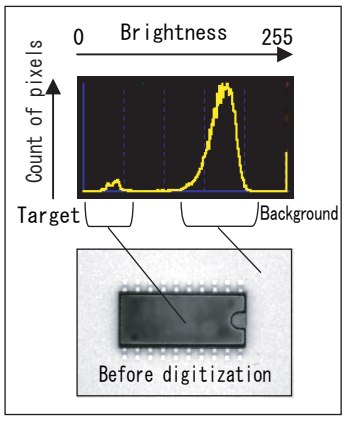

Figure 2

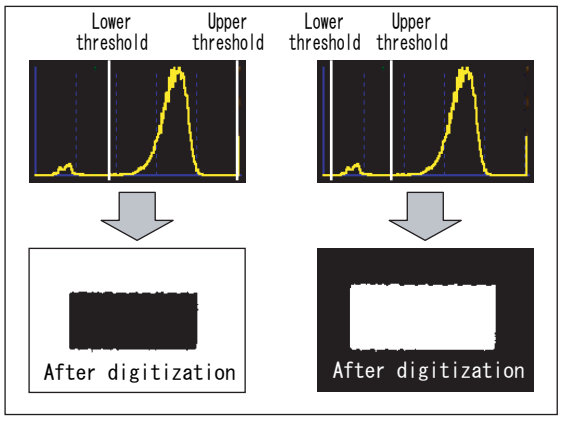

⚠Caution

Only rectangular processing windows (angle = 0) can be selected for image processing.

9.2.8.1 Manually specifying boundaries

Operating procedure

1. **Choose the Histogram radio button to display the Histogram settings screen.**
2. **Select the Processing window to display the histogram calculation window.**
3. **Press the Calculate button to display the histogram.**
4. **Select the Digitization radio button to display the Digitization settings screen.**
5. **Specify the two digitization thresholds and check the lines on the histogram.**
6. **Press the Apply button.**

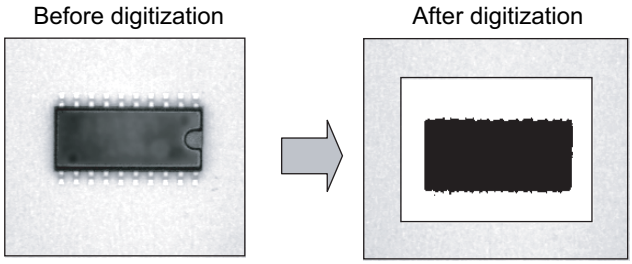

9.2.8.2 Automatically determining digitization thresholds

Operating procedure

1. **Press the Histogram radio button to display the Histogram settings screen.**
2. **Choose the window to process in the Processing window.**
3. **Choose the method: calculation with mode method, discriminant analysis, or p-tile threshold calculation.**

   If your choice is other than p-tile, proceed to step 5.
4. **(For p-tile only) Specify the reference area and target fields.**
5. **Press the Measure button to display the resulting boundaries on the histogram and save them in the two boundary fields of the Digitization settings screen.**
6. **Select the Digitization radio button to display the Digitization settings screen.**
7. **Press the Apply button**

9.2.9 Calculating area, center of gravity, and principal axis

The following is the procedure for determining three object features: area, center of gravity, and principal axis. This procedure uses the thresholds specified with the Register digitization settings screen.

Feature (SA/CG/PA) settings screen

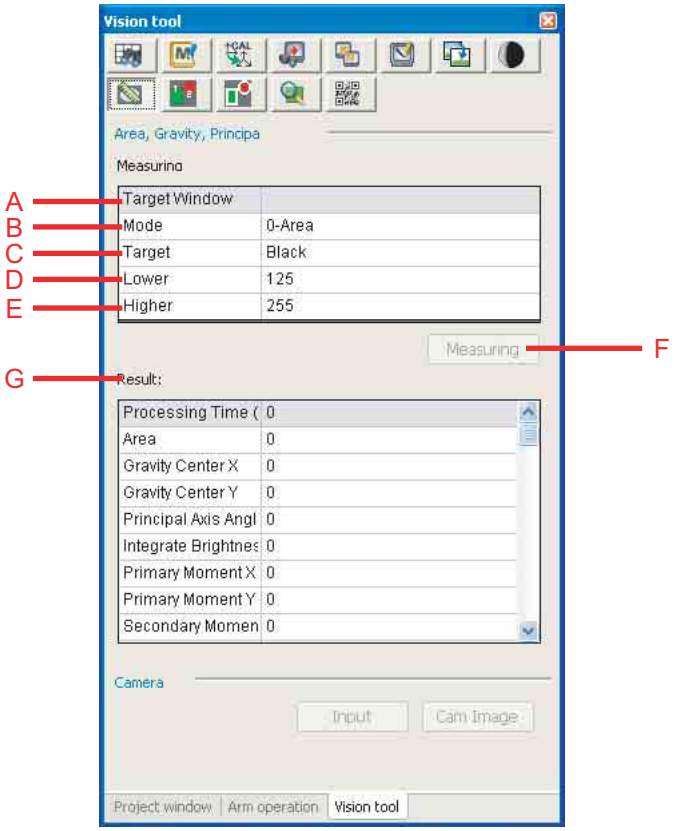

A: Target window

This field specifies the window range to measure.

B: Feature

This field specifies the feature to extract: surface area, center of gravity, or principal axis.

C: Color

This field specifies the color to use: white or black.

D: Digitization upper threshold

E: Digitization lower threshold

These two fields display/specify the digitization thresholds for image analysis.

F: Measure

This button determines the specified feature.

G: Results

This area displays a list of measurement results.

Note

What is the brightness integral?

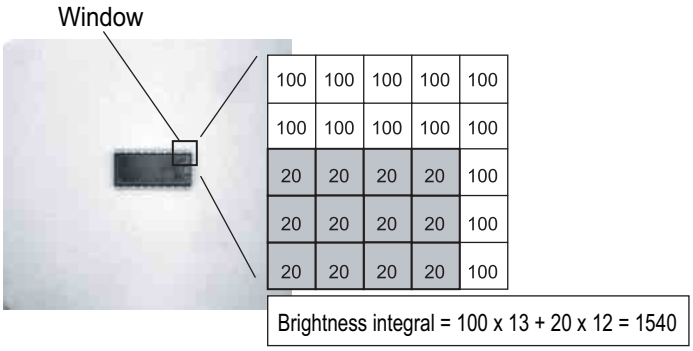

The brightness integral is the sum of the brightness values over all camera image pixels within the specified range in the window.

What is the area?

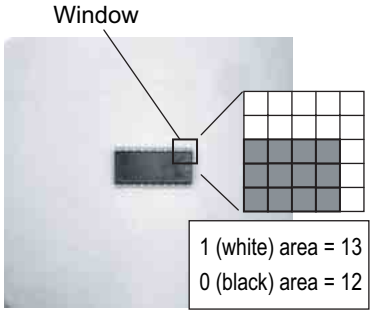

The area is a count of pixels within the specified range in the window having the specified color after digitization: black (0) or white (1). The DENSO μVision board implementation combines on-the-fly digitization and counting, making it unnecessary for programs to first digitize and also leaving the image unaltered on the screen.

What is the center of gravity?

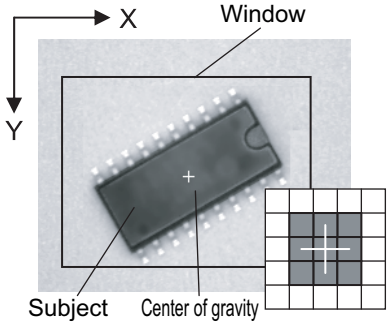

Camera images portray their subjects as flat, so here center of gravity means in the plane. The DENSO μVision board determines the center of gravity by digitizing the pixels within the specified range in the window and then counting either black (0) or white (1) ones. This center of gravity has both x- and y-coordinates.

What is the principal axis angle?

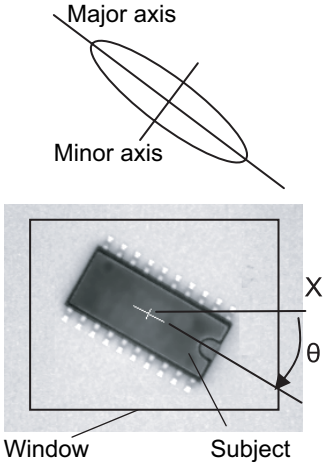

Camera images portray their subjects as flat, but a subject can have its major axis (length) rotated relative to the viewing plane. The minor axis (width) is perpendicular to this axis. The DENSO μVision board defines the angle (θ) from the plane's x-axis to the subject's major axis as the principal axis angle. The DENSO μVision board determines this angle by digitizing the pixels within the specified range in the window and then counting either black (0) or white (1) ones.

9.2.9.1 Extracting features

Operating procedure

1. **Choose a target window range to measure.**
2. **Choose the feature: area, center of gravity, or principal axis.**
3. **Choose the color: 0-White or 1-Black.**
4. **Press the Measure button to display the resulting boundaries on the histogram and save them in the two boundary fields of the Digitization settings screen and display them in the Vision monitor window.**

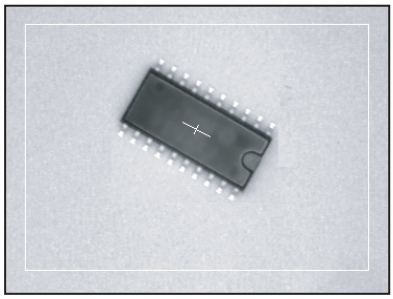

9.2.10 Labeling

This function labels objects within the specified window.

This procedure uses the thresholds specified with the Register digitization settings screen.

Labeling settings screen

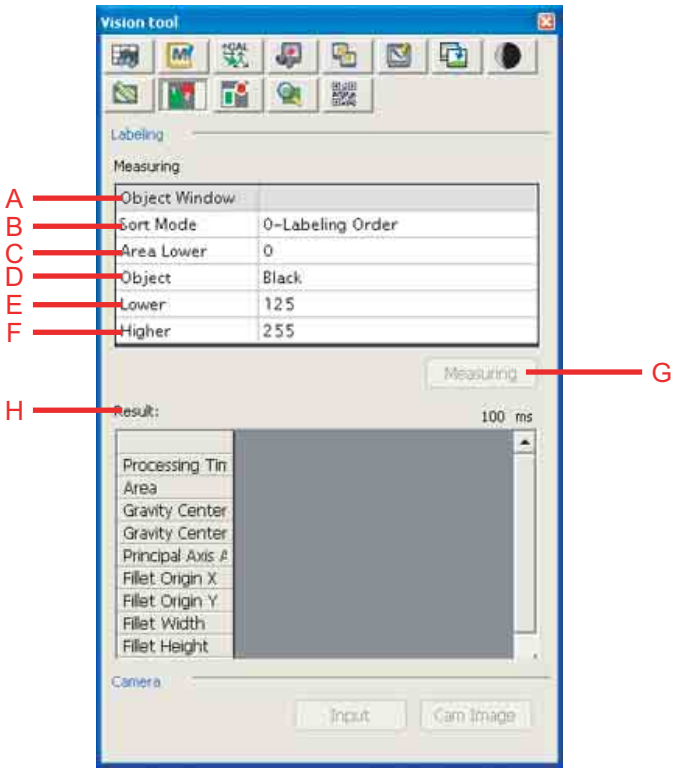

A: Target window

This field specifies the window range to measure.

B: Sorting order

This field specifies the display order for the results.

C: Area cutoff

Only objects larger than this value qualify.

D: Color

This field specifies the color to use: white or black.

E: Digitization upper threshold

F: Digitization lower threshold

These two fields display/specify the digitization thresholds for image analysis.

G: Measure

This button is for finding and labeling objects in the window.

H: Results

This area displays a list of measurement results.

Note

What is labeling?

Labeling digitizes the camera image and then sequentially numbers contiguous areas of black (0) or white (1) pixels. (See Figure 1.) The result is a list of individual objects within the specified range in the window. This list includes the following object features: area, center of gravity, principal axis angle, fillet, and circumference. Here fillet means the bounding rectangle, the minimum rectangle enclosing an object. (See Figure 2.) The circumference is the number of pixels just inside this boundary. (See Figure 3.)

Figure 1



Figure 2



Figure 3



⚠Caution

Only rectangular processing windows (angle = 0) can be selected for image processing.

9.2.10.1 Labeling objects

Operating procedure

1. **Choose a target window range to measure.**
2. **Choose the sorting order: numerical, descending area, or ascending area.**
3. **Enter the area cutoff, a boundary specifying the minimum size. Objects smaller than this setting are ignored.**
4. **Choose the color: 0-White or 1-Black.**
5. **Press the Measure button to display the resulting boundaries on the histogram, save them in the two boundary fields of the Digitization settings screen, and display the results in the Vision monitor window.**

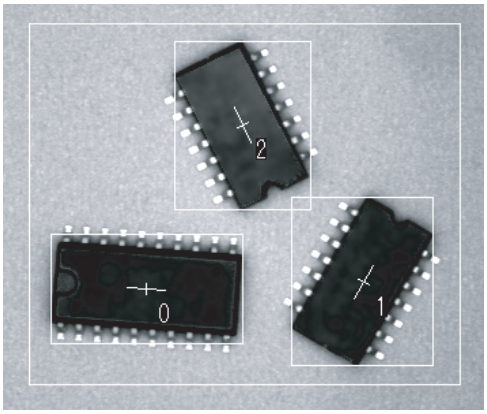

9.2.11 Edge detection

This function detects edges within the specified window.

This measurement uses a projection window (Parameter = 0 or 1).

Edge settings screen

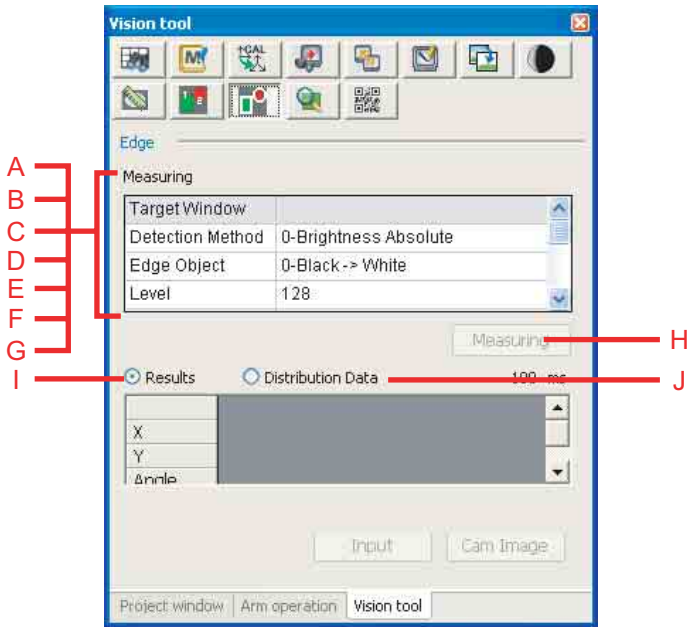

A: Target window

This field specifies the window range to measure.

B: Method

This field specifies the edge detection method.

C: Transition

This field specifies the transition defining edges.

D: Level

This field specifies the edge detection level.

E: Scan direction

This field specifies the scan direction.

F: Digitization upper threshold

G: Digitization lower threshold

These two fields display/specify the digitization thresholds for image analysis.

H: Measure

This button proceeds with the specified operation.

I: Results

This radio button lists measurement results.

J: Distribution data

This radio button displays the distribution for the measurement results.

Note

What is an edge?

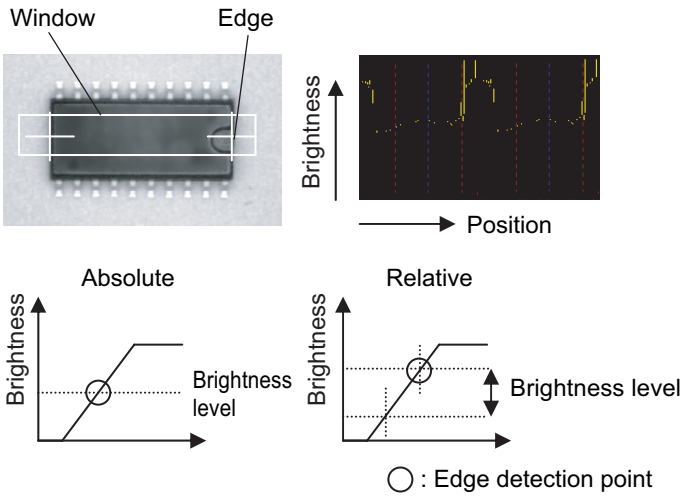

An edge is a brightness transition in the specified window, a boundary between dark grays and light ones. The DENSO μVision board offers edge detection based on brightness levels or on areas. For brightness levels, there is also a choice of absolute and relative levels for detecting transitions. Specifying absolute defines transition as crossing the specified brightness level. Specifying relative defines transition as a change in brightness or surface bigger than the specified threshold.

⚠Caution

Here the Target window range can have the following shapes.

- Straight line (scan = 0 or 1)
- Rectangle (scan = 0 or 1)
- Sector (scan = 0 or 1)

9.2.11.1 Specifying measurement conditions

Level

Specify the edge detection level. The range is 0 to 255 for detection using a brightness level (absolute or relative) and 0 to 512 for detection using an area (absolute or relative).

Digitization thresholds

Detection using areas requires specifying the digitization thresholds. Pixels between the two thresholds become white (1); everything else, black (0).

Scan direction

Specify the scan direction. The meaning of Positive and Negative depends on the window shape.

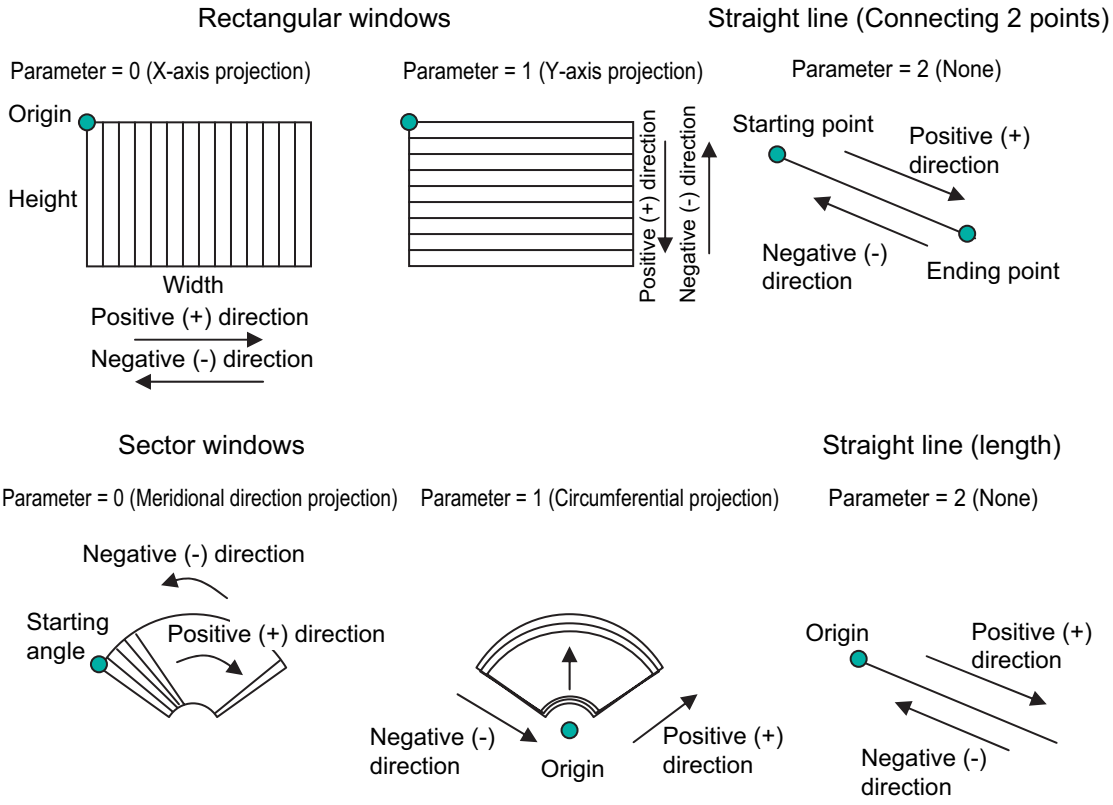

9.2.11.2 Detecting edges

Operating procedure

1. **Choose a target window range to measure.**
2. **Choose the edge detection method: absolute, relative, area relative, or area relative.**
3. **Choose the Transition(s): 0-Black-to-White, 1-White-to-Black, or 2-Both.**
4. **Specify the level.**
5. **Choose the scan direction for scanning in the projection window: Positive or Negative.**
6. **Press the Measure button to display the resulting boundaries on the histogram, save them in the two boundary fields of the Digitization settings screen, and display the results in the Vision monitor window.**

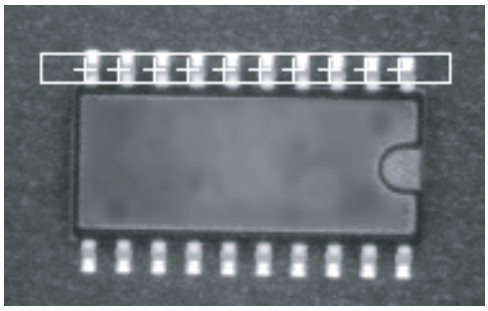

9.2.11.3 Displaying distribution and graph

The Edge settings screen displays the measurement results as either a distribution or a graph. These displays are for checking brightness and area changes in the window.

The graph display also permits checking of the brightness and area distribution for the specified location.

Distribution data

Selecting the Distribution radio button switches to the following display.

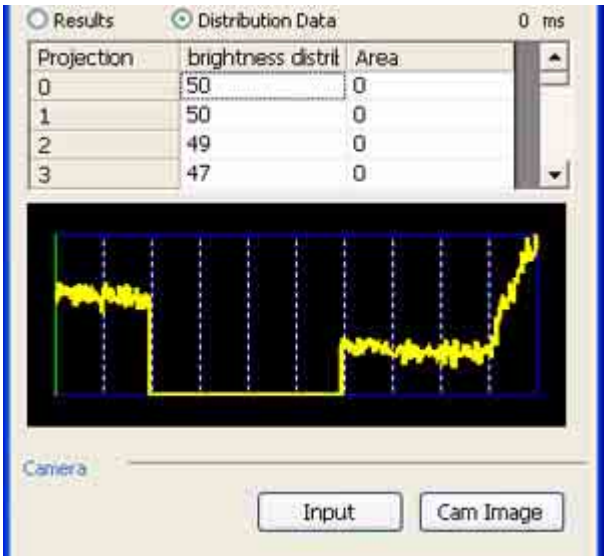

Graph display

Clicking on the Brightness distribution or Area column displays the Brightness distribution graph or Area graph, respectively. It also displays a marker at the projection position for the selected location.

9.2.12 Model search

This function runs pattern matching in the specified window using the specified search model. The search model used must be defined previously.

Model search settings screen

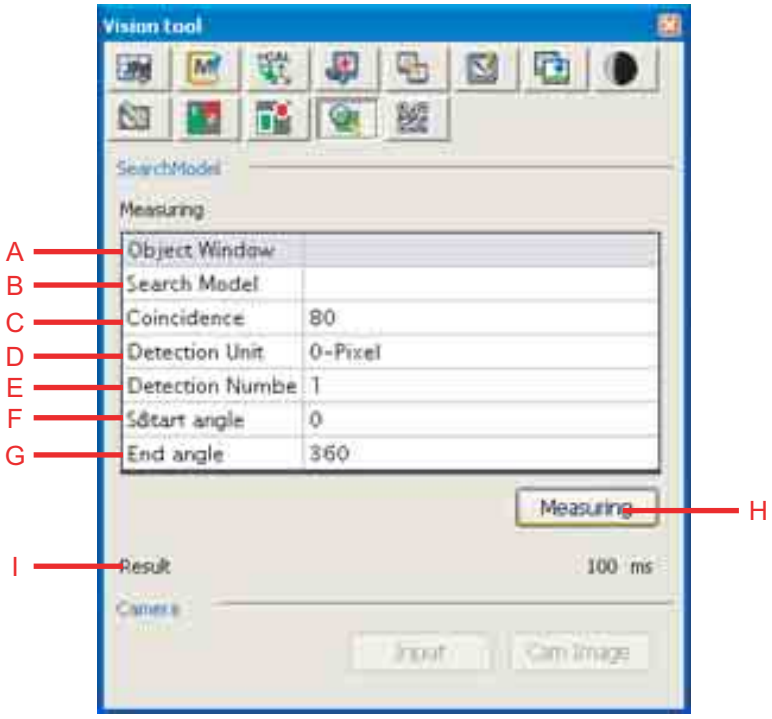

A: Target window

This field specifies the window range to measure.

B: Search model

This field specifies the model for the operation.

C: Match judgment

This field specifies the match judgment criterion.

D: Detection unit

This field specifies the unit for detection.

E: Detection count

This field specifies the maximum number of pattern matches to search for.

F: Starting angle

This field specifies the starting angle for the search.

G: End angle

This field specifies the end angle for the search.

H: Measure

This button proceeds with the operation.

I: Measurement results

This area displays a list of measurement results.

Note

What is a model search?

A search moves standard image data, the search model, over the specified range looking for matches. (See Figure 1.) A search model consists of image data and reference coordinates (OX, OY). (See Figure 2.) The match judgment specifies the minimum similarity, the result of a numerical comparison of the search model and the data at the current position, required to be considered a match. The precision setting specifies pattern matching alignment: at the pixel level or smaller. Subpixel measurements take longer.

Figure 1

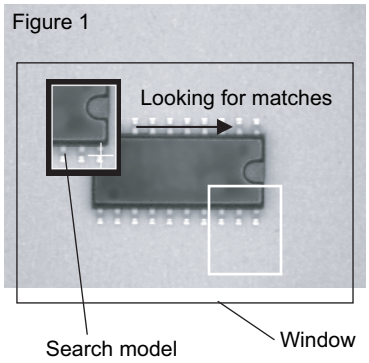

Figure 2 Search model

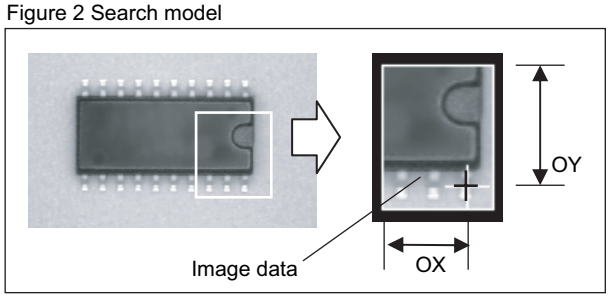

⚠Caution

- Only rectangular windows (angle = 0) qualify as targets.
- The two angle fields are not available when the robot controller does not support angle measurements.

9.2.12.1 Specifying measurement conditions

Target window range to measure.

Search model

This field specifies the search model to use.

Match judgment

This field specifies the minimum score considered a match.

Detection unit

This field specifies the precision for pattern matching coordinates: pixel or subpixel. Specifying subpixel means that measurements take longer.

Detection count

This field specifies the number of matches expected. Reaching this limit produces normal termination. Otherwise, the operation times out with an error message. In the latter case, try reducing this setting.

Starting and end angles

These fields specify the angle range for the search. The search looks for matches between the two angles about the origin.

9.2.12.2 Running a model search

Operating procedure

1. **Choose a target window range to measure.**
2. **Choose a search model.**
3. **Specify the match judgment criterion.**
4. **Choose the detection unit: pixel or subpixel.**
5. **Specify the detection count.**
6. **Specify the starting and end angles.**
7. **Press the Measure button to display the resulting boundaries on the histogram, save them in the two boundary fields of the Digitization settings screen, and display the results in the Vision monitor window.**

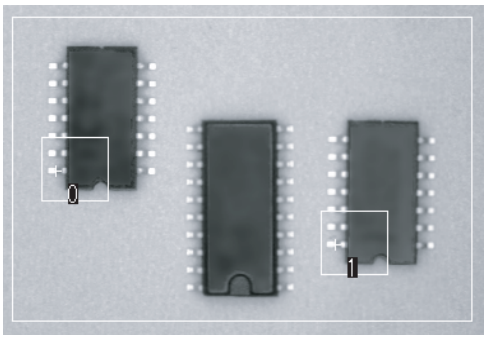

Search model

9.2.13 Reading a QR Code symbol

This function reads in a QR Code symbol from the specified window..

Code reading settings screen

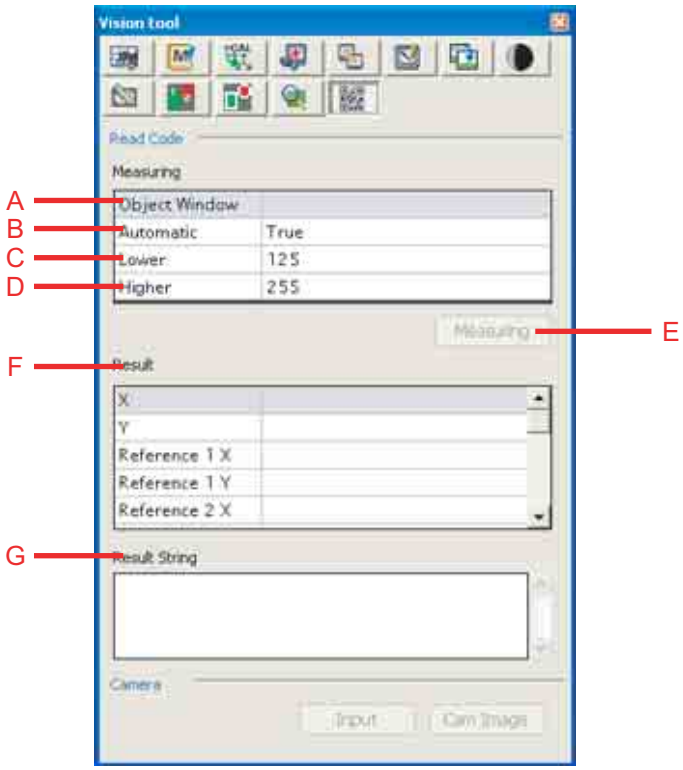

A: Target window

This field specifies the window range to measure.

B: Automatic digitization

Choosing True specifies automatic digitization.

C: Digitization upper threshold

D: Digitization lower threshold

These two fields display/specify the digitization thresholds for image analysis.

E: Measure

This button proceeds with the operation.

F: Results

This area displays a list of measurement results.

G: Result string

This area displays the corresponding string.

9.2.13.1 Specifying measurement conditions

Automatic digitization

Enable or disable automatic digitization. Choosing True specifies automatic digitization.

Digitization thresholds

If automatic digitization has been disabled, these two fields specify the two boundaries used in digitization.

9.2.13.2 Reading in a QR Code symbol

Operating procedure

1. **Choose a target window range to measure.**
2. **Enable or disable automatic digitization.**

   Choose True for automatic digitization. Otherwise, specify the thresholds with the Register digitization settings screen.
3. **Press the Measure button to display the resulting boundaries on the histogram, save them in the two boundary fields of the Digitization settings screen, and display the results in the Vision monitor window.**

Chapter 10 Appendices

10.1 List of Prohibited Characters

Use of the following characters is prohibited in file names (e.g., program names and project names).

Using any of those characters results in an error during file transfer between WINCAPS III and the robot controller or during loading or compilation in the robot controller.

Single-byte characters

[\

Double-byte characters

∵ ― Ъ Ы ー ソ ゼ Ⅷ Ⅸ
十 夕 予 申 充 圭 措 啓 貼 端 構 欺 暴 骸
表 房 納 票 能 深 梗 甜 禄 擬
纂 麓 兌 喙 媼 彈 拏 喀 媾 彌 拿 杤 歃 濬
杣 歇 濕 卹 禺 綣 膽 畚 秉 綵 臀 藹 觸 體
藜 觴 躰 鑓 饉 鷦 倞 鐔 饅 鷭 倦 砥 纊 狄
砌 狄 噂 浬 曾 箪 兔

DENSO ROBOT

Programming Support Tool

WINCAPSIII GUIDE

First Edition June 2008
Third Edition April 2009
Fourth Edition March 2010

DENSO WAVE INCORPORATED

3M**C

The purpose of this manual is to provide accurate information in the handling and operating of the robot. Please feel free to send your comments regarding any errors or omissions you may have found, or any suggestions you may have for generally improving the manual.
In no event will DENSO WAVE INCORPORATED be liable for any direct or indirect damages resulting from the application of the information in this manual.